SAMSUNG

PROJECTION TV RECEIVER

Chassis : P55A(N) REV.1
Model : HCN4226WX/XAA
HCN4226W3S/XAA
ST54T8PCS/XAX
HCN4727W5S/XAA

SERVICE Manual

PROJECTION TV RECEIVER

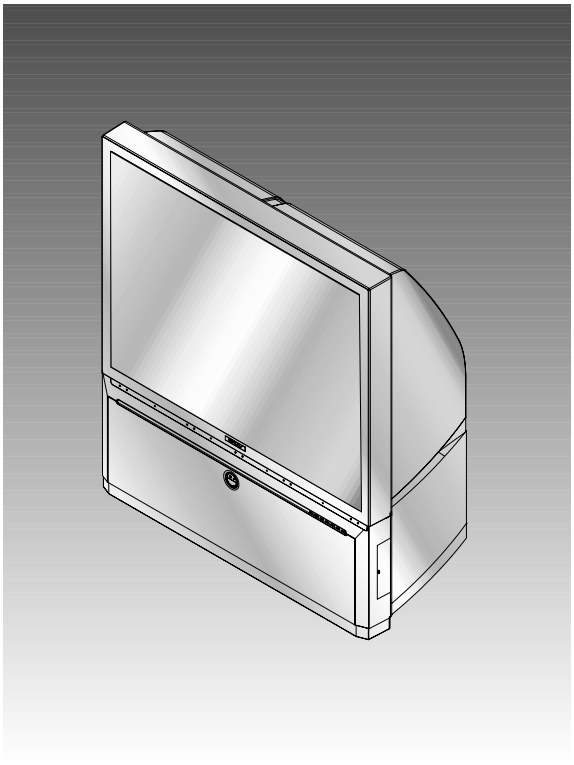

CONTENTS

1. Precautions
2. Reference Information
3. Specifications
4. Alignment and Adjustments
5. Troubleshooting
6. Exploded View and Parts List
7. Electric Parts List
8. Block Diagrams
9. Wiring Diagram
10. Schematic Diagrams

1. Precautions

Follow these safety, servicing and ESD precautions to prevent damage and protect against potential hazards such as electrical shock and X-rays.

1-1 Safety Precautions

1. Be sure that all of the built-in protective devices are replaced. Restore any missing protective shields.

2. When reinstalling the chassis and its assemblies, be sure to restore all protective devices, including: nonmetallic control knobs and compartment covers.

3. Make sure that there are no cabinet openings through which people—particularly children—might insert fingers and contact dangerous voltages. Such openings include the spacing between the picture tube and the cabinet mask, excessively wide cabinet ventilation slots, and improperly fitted back covers.

   If the measured resistance is less than 1.0 megohm or greater than 5.2 megohms, an abnormality exists that must be corrected before the unit is returned to the customer.

4. Leakage Current Hot Check (Figure 1-1):
   Warning: Do not use an isolation transformer during this test. Use a leakage-current tester or a metering system that complies with American National Standards Institute (ANIS C101.1, Leakage Current for Appliances), and Underwriters Laboratories (UL Publication UL1410, 59.7).

5. With the unit completely reassembled, plug the AC line cord directly into the power outlet. With the unit's AC switch first in the ON position and then OFF, measure the current between a known earth ground (metal water pipe, conduit, etc.) and all exposed metal parts, including: antennas, handle brackets, metal cabinets, screwheads and control shafts. The current measured should not exceed 0.5 milliamp. Reverse the power-plug prongs in the AC outlet and repeat the test.

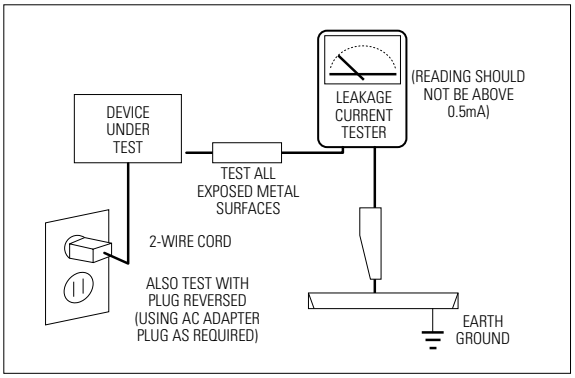
(READING SHOULD NOT BE ABOVE 0.5mA)
LEAKAGE CURRENT TESTER
DEVICE UNDER TEST
TEST ALL EXPOSED METAL SURFACES
2-WIRE CORD
ALSO TEST WITH PLUG REVERSED (USING AC ADAPTER PLUG AS REQUIRED)
EARTH GROUND

Fig. 1-1 AC Leakage Test

6. Antenna Cold Check:
   With the unit's AC plug disconnected from the AC source, connect an electrical jumper across the two AC prongs. Connect one lead of the ohmmeter to an AC prong. Connect the other lead to the coaxial connector.

7. X-ray Limits:
   The picture tube is especially designed to prohibit X-ray emissions. To ensure continued X-ray protection, replace the picture tube only with one that is the same type as the original. Carefully reinstall the picture tube shields and mounting hardware; these also provide X-ray protection.

8. High Voltage Limits:
   High voltage must be measured each time servicing is done on the B+, horizontal deflection or high voltage circuits. Correct operation of the X-ray protection circuits must be reconfirmed whenever they are serviced. (X-ray protection circuits also may be called "horizontal disable" or "hold-down".)

   Heed the high voltage limits. These include the X–ray Protection Specifications Label, and the Product Safety and X-ray Warning Note on the service data schematic.

1-1 Safety Precautions (Continued)

9. High voltage is maintained within specified limits by close-tolerance, safety-related components and adjustments. If the high voltage exceeds the specified limits, check each of the special components.

10. Design Alteration Warning:
    Never alter or add to the mechanical or electrical design of this unit. Example: Do not add auxiliary audio or video connectors. Such alterations might create a safety hazard. Also, any design changes or additions will void the manufacturer's warranty.

11. Hot Chassis Warning:
    Some TV receiver chassis are electrically connected directly to one conductor of the AC power cord. If an isolation transformer is not used, these units may be safely serviced only if the AC power plug is inserted so that the chassis is connected to the ground side of the AC source.

    To confirm that the AC power plug is inserted correctly, do the following: Using an AC voltmeter, measure the voltage between the chassis and a known earth ground. If the reading is greater than 1.0V, remove the AC power plug, reverse its polarity and reinsert. Re-measure the voltage between the chassis and ground.

12. Some TV chassis are designed to operate with 85 volts AC between chassis and ground, regardless of the AC plug polarity. These units can be safely serviced only if an isolation transformer inserted between the receiver and the power source.

13. Some TV chassis have a secondary ground system in addition to the main chassis ground. This secondary ground system is not isolated from the AC power line. The two ground systems are electrically separated by insulating material that must not be defeated or altered.

14. Components, parts and wiring that appear to have overheated or that are otherwise damaged should be replaced with parts that meet the original specifications. Always determine the cause of damage or overheating, and correct any potential hazards.

15. Observe the original lead dress, especially near the following areas: Antenna wiring, sharp edges, and especially the AC and high voltage power supplies. Always inspect for pinched, out-of-place, or frayed wiring. Do not change the spacing between components and the printed circuit board. Check the AC power cord for damage. Make sure that leads and components do not touch thermally hot parts.

16. Picture Tube Implosion Warning:
    The picture tube in this receiver employs "integral implosion" protection. To ensure continued implosion protection, make sure that the replacement picture tube is the same as the original.

17. Do not remove, install or handle the picture tube without first putting on shatterproof goggles equipped with side shields. Never handle the picture tube by its neck. Some "in-line" picture tubes are equipped with a permanently attached deflection yoke; do not try to remove such "permanently attached" yokes from the picture tube.

18. Product Safety Notice:
    Some electrical and mechanical parts have special safety-related characteristics which might not be obvious from visual inspection. These safety features and the protection they give might be lost if the replacement component differs from the original—even if the replacement is rated for higher voltage, wattage, etc.

    Components that are critical for safety are indicated in the circuit diagram by shading, (⚡) or (⚠).
    Use replacement components that have the same ratings, especially for flame resistance and dielectric strength specifications.
    A replacement part that does not have the same safety characteristics as the original might create shock, fire or other hazards.

1-2 Servicing Precautions

Warning 1 : First read the "Safety Precautions" section of this manual. If some unforeseen circumstance creates a conflict between the servicing and safety precautions, always follow the safety precautions.
Warning 2 : An electrolytic capacitor installed with the wrong polarity might explode.

1. Servicing precautions are printed on the cabinet. Follow them.

2. Always unplug the unit's AC power cord from the AC power source before attempting to: (a) Remove or reinstall any component or assembly, (b) Disconnect an electrical plug or connector, (c) Connect a test component in parallel with an electrolytic capacitor.

3. Some components are raised above the printed circuit board for safety. An insulation tube or tape is sometimes used. The internal wiring is sometimes clamped to prevent contact with thermally hot components. Reinstall all such elements to their original position.

4. After servicing, always check that the screws, components and wiring have been correctly reinstalled. Make sure that the portion around the serviced part has not been damaged.

5. Check the insulation between the blades of the AC plug and accessible conductive parts (examples: metal panels, input terminals and earphone jacks).

"CAUTION : Double-pole/neutral fusing"

6. Insulation Checking Procedure: Disconnect the power cord from the AC source and turn the power switch ON. Connect an insulation resistance meter (500V) to the blades of the AC plug.

   The insulation resistance between each blade of the AC plug and accessible conductive parts (see above) should be greater than 1 megohm.

7. Never defeat any of the B+ voltage interlocks. Do not apply AC power to the unit (or any of its assemblies) unless all solid-state heat sinks are correctly installed.

8. Always connect a test instrument's ground lead to the instrument chassis ground before connecting the positive lead; always remove the instrument's ground lead last.

9. When some parts inside the optical engine (except lamp) are damaged, replace the whole optical engine.

1-3 Precautions for Electrostatically Sensitive Devices (ESDs)

1. Some semiconductor (“solid state”) devices are easily damaged by static electricity. Such components are called Electrostatically Sensitive Devices (ESDs); examples include integrated circuits and some field-effect transistors. The following techniques will reduce the occurrence of component damage caused by static electricity.
2. Immediately before handling any semicon ductor components or assemblies, drain the electrostatic charge from your body by touching a known earth ground. Alternatively, wear a discharging wrist-strap device. (Be sure to remove it prior to applying power—this is an electric shock precaution.)
3. After removing an ESD-equipped assembly, place it on a conductive surface such as aluminum foil to prevent accumulation of electrostatic charge.
4. Do not use freon-propelled chemicals. These can generate electrical charges that damage ESDs.
5. Use only a grounded-tip soldering iron when soldering or unsoldering ESDs.
6. Use only an anti-static solder removal device. Many solder removal devices are not rated as “anti-static”; these can accumulate sufficient electrical charge to damage ESDs.
7. Do not remove a replacement ESD from its protective package until you are ready to install it. Most replacement ESDs are packaged with leads that are electrically shorted together by conductive foam, aluminum foil or other conductive materials.
8. Immediately before removing the protective material from the leads of a replacement ESD, touch the protective material to the chassis or circuit assembly into which the device will be installed.
9. Minimize body motions when handling unpackaged replacement ESDs. Motions such as brushing clothes together, or lifting a foot from a carpeted floor can generate enough static electricity to damage an ESD.

CAUTION

These servicing instructions are for use by qualified service personnel only.
To reduce the risk of electric shock do not perform any servicing other than that contained in the operating instructions unless you are qualified to do so.

2. Reference Information

2-1 Tables of Abbreviations and Acronyms

Table 2-1 Abbreviations

A	Ampere	MV	Megavolt
Ah	Ampere-hour	MW	Megawatt
Å	Angstrom	MΩ	Megohm
dB	Decibel	m	Meter
dBm	Decibel Referenced to One Milliwatt	µA	Microampere
		µF	Microfarad
°C	Degree Celsius	µH	Microhenry
°F	Degree Fahrenheit	µm	Micrometer
°K	degree Kelvin	µs	Microsecond
F	Farad	µW	Microwatt
G	Gauss	mA	Milliampere
GHz	Gigahertz	mg	Milligram
g	Gram	mH	Millihenry
H	Henry	ml	Milliliter
Hz	Hertz	mm	Millimeter
h	Hour	ms	Millisecond
ips	Inches Per Second	mV	Millivolt
kWh	Kilowatt-hour	nF	Nanofarad
kg	Kilogram	Ω	Ohm
kHz	Kilohertz	pF	Picofarad
kΩ	Kilohm	lb	Pound
km	Kilometer	rpm	Revolutions Per Minute
km/h	Kilometer Per Hour	rps	Revolutions Per Second
kV	Kilovolt	s	Second (Time)
kVA	Kilovolt-ampere	V	Volt
kW	Kilowatt	VA	Volt-ampere
l	Liter	W	Watt
MHz	Megahertz	Wh	Watt-hour

Table 2-2 Table of Acronyms

ABL	Automatic Brightness Limiter	I/O	Input/output
AC	Alternating Current	L	Left
ACC	Automatic Chroma Control	L	Low
AF	Audio Frequency	LED	Light Emitting Diode
AFC	Automatic Frequency Control	LF	Low Frequency
AFT	Automatic Fine Tuning	MOSFET	Metal-Oxide-Semiconductor-Field-Effect-Tr
AGC	Automatic Gain Control	MTS	Multi-channel Television Sound
AM	Amplitude Modulation	NAB	National Association of Broadcasters
ANSI	American National Standards Institute	NEC	National Electric Code
APC	Automatic Phase Control	NTSC	National Television Systems Committee
APC	Automatic Picture Control	OSD	On Screen Display
A/V	Audio-Video	PCB	Printed Circuit Board
AVC	Automatic Volume Control	PLL	Phase-Locked Loop
BAL	Balance	PWM	Pulse Width Modulation
BPF	Bandpass Filter	QIF	Quadrature Intermediate Frequency
B-Y	Blue-Y	R	Right
CATV	Community Antenna Television (Cable TV)	RC	Resistor & Capacitor
CB	Citizens Band	RF	Radio Frequency
CCD	Charge Coupled Device	R-Y	Red-Y
CCTV	Closed Circuit Television	SAP	Second Audio Program
Ch	Channel	SAW	Surface Acoustic Wave(Filter)
CRT	Cathode Ray Tube	SIF	Sound Intermediate Frequency
CW	Continuous Wave	SMPS	Switching Mode Power Supply
DC	Direct Current	S/N	Signal/Noise
DVM	Digital Volt Meter	SW	Switch
EIA	Electronics Industries Association	TP	Test Point
ESD	Electrostatic Discharge	TTL	Transistor Transistor Logic
ESD	Electrostatically Sensitive Device	TV	Television
FBP	Feedback Pulse	UHF	Ultra High Frequency
FBT	Flyback Transformer	UL	Underwriters Laboratories
FF	Flip-Flop	UV	Ultraviolet
FM	Frequency Modulation	VCD	Variable-Capacitance Diode
FS	Fail Safe	VCO	Voltage Controlled Oscillator
GND	Ground	VCXO	Voltage Controlled Crystal Oscillator
G-Y	Green-Y	VHF	Very High Frequency
H	High	VIF	Video Intermediate Frequency
HF	High-Frequency	VR	Variable Resistor
HI-FI	High Fidelity	VTR	Video Tape Recorder
IC	Inductance-Capacitance	VTVM	Vacuum Tube Voltmeter
IC	Integrated Circuit	TR	Transistor
IF	Intermediate Frequency		

2-2 Description of Dynamic Focus

Most large-screen video display devices that are using CRT (including CDT) usually apply the Dynamic Focus (hereinafter D/F) circuit.

As CRT has non-spherical surface (perfect spherical surface = 1, non-spherical surface R>1), the distance that the electron beam emitted from the electron gun reaches to the center of CRT is different from the one that the electron beam reaches to the corners. (See Figure 1.)

Only the beam, which has the equal distance as the beam from the electron gun to the center of CRT surface, can maintain the optimum focus.

By this reason, focus dagradation at corners occurs inevitably.

To recover this, the speed of the electron beam injected into the corners of CRT should increase and the focus dagradation by the difference of distances can be compensated.

Increasing the voltage is used as a method of increasing the speed of the electron beam at the corners of screen.

In this case, an ideal D/F voltage waveform is the form of parabola where the center of screen has low voltage and the corners has the highest voltages.

The horizontal D/F waveform compensates the focus dagradation at left and right sides, but the vertical D/F waveform does at top and bottom sides.

The horizontal D/F and vertical D/F waveforms are separately created and mix two signals to compensate the focus of the whole screen.

And the vertical Dynamic Focus waveform is composed of the horizontal Dynamic Focus waveforms as much as the number of scanning lines. (See Figure 2.)

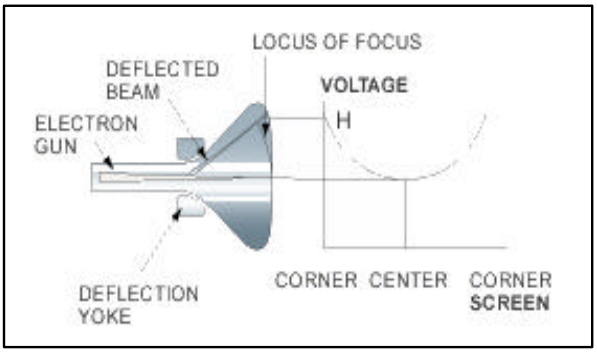

Fig. 1 Dynamic Focus Diagram (Horizantal)

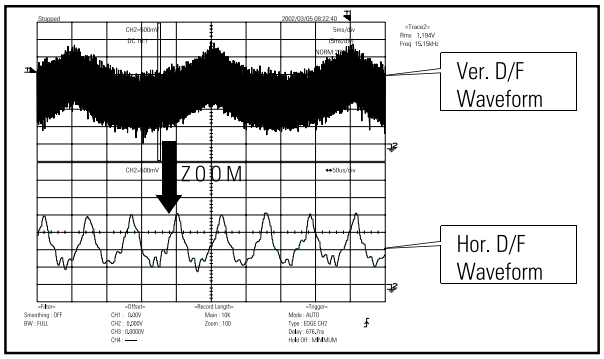

Fig. 2 H/V Dynamic Focus Waveform

2-3 IC Line Up

2-3-1 Progressive

Table 2 - 3 IC Line - Up

No	Block Name	IC Location	IC Name	CODE-NO
1	MAIN	IC601	TDA7265	AA96-00623E (ASSY)
		IC602	MSP3420G (QFP)	1204-002002
		IC603	TL062CDT (SOP)	1201-000541
		IC604	TL062CDT (SOP)	1201-000541
		IC605	TEA6422D (SOP)	1001-001178
		IC701	TEA6425D (SOP)	1001-001177
		IC702	TEA6425D (SOP)	1001-001177
		IC704	PCF8591T	1002-001048
		IC801	KA278RA05 X 3EA +78R09+7808	AA96-00475B (ASSY)
		IC802	7905 (DIP)	1203-000119
		IC807	78R12 (DIP)	1203-000165
		IC808	SI-3050C	BP96-00020G (ASSY)
2	Micom	IC901	SDA5550M (QGP)	204-001912
		IC902	24C16 (SOP)	1103-000180
		IC903	78RM33D	1203-002302
		IC905	M27W201-80F6 (DIP)	1102-001130
3	PRO-SCAN	IC01	VSP9407 (QFP)	1204-001938
		IC02	CXA2151Q (QFP)	1204-001814
		IC03	BA7657F (SOP)	1001-001082
		IC04	CXA2165Q (QFP)	1204-001989
		IC05	LF18	1203-002186
		IC06	7027	1203-001211
		IC11	78RM33D	1203-002302
		IC13	74HC123 (SOP)	0801-000662
4	CG-MDL	IC01	SDC12 (QFP)	BP13-00003A
		IC02	78RM33D	1203-002302

Table 2 - 3 IC Line - Up (Continued)				
No	Block Name	IC Location	IC Name	CODE-NO
4	CG-MDL	IC03	7042	1203-001824
		IC04	7S04	0801-002345
		IC05	24C64 (SOP)	1103-001195
		IC06	TSC871251G2D (PLCC)	AA09-00032A
		IC07	EL2250CS (SOP)	1201-001520
		IC08	74HC4052 (SOP)	1001-000164
		IC09	072 (SOP)	1201-001504
		IC10	072 (SOP)	1201-001504
		IC11	072 (SOP)	1201-001504
		IC12	LM324AM (SOP)	1201-001135
		IC13	NC7SB3157 (SOT)	1001-001155
		IC14	072 (SOP)	1201-001504
		IC15	7S04 (SOP)	0801-002345
		IC16	7S04 (SOP)	0801-002345
		IC17	TLC2932IPWLE (SOP)	1209-001163
5	SUB	ICS801	VIPER12A	1203-002177
		ICS802	KA7805	1203-000568
		IC301	LA7845	1204-000517
		IC421	78R12	1203-000165
		IC430	317 (TO-220)	1203-000161
		IC431	MC4558C	1201-000191
		IC471	TL494CN	1203-000610
		IC831S	STR-X6456	AA13-00105A
		IC851	SE110N	1203-001400
		ICR01S	431 (TO-92)	1203-001217
		PC801S	PS2561	0604-001032
		PC811S	PS2561	0604-001032
6	CRT	IC501, 531, 561	TDA6111Q	1201-001131
7	CG-AMP	ICZ103, 104	STK392-010	1201-001512

2-4 MICOM IIC BUS LINE -UP

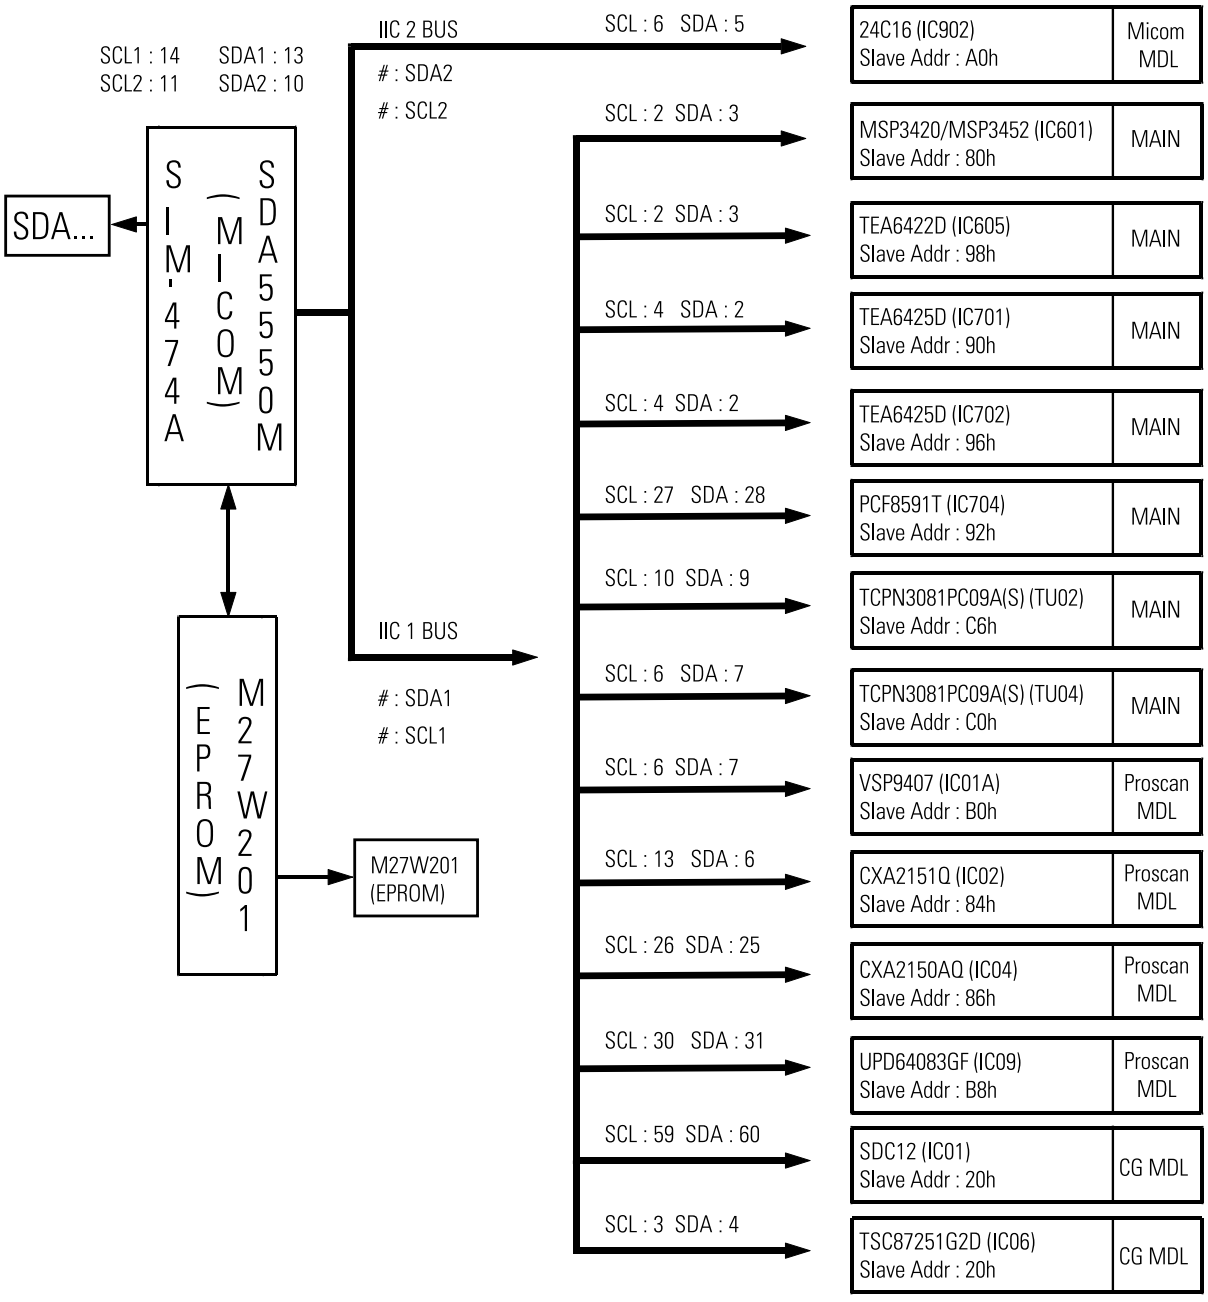
SCL1 : 14
SCL2 : 11
SDA1 : 13
SDA2 : 10
SDA...
SIM-474A (MICOM)
SDA5550M
M27W201 (EPROM)
IIC 2 BUS
: SDA2
: SCL2
IIC 1 BUS
: SDA1
: SCL1
M27W201 (EPROM)
SCL : 6 SDA : 5
SCL : 2 SDA : 3
SCL : 2 SDA : 3
SCL : 4 SDA : 2
SCL : 4 SDA : 2
SCL : 27 SDA : 28
SCL : 10 SDA : 9
SCL : 6 SDA : 7
SCL : 6 SDA : 7
SCL : 13 SDA : 6
SCL : 26 SDA : 25
SCL : 30 SDA : 31
SCL : 59 SDA : 60
SCL : 3 SDA : 4
24C16 (IC902) Slave Addr : A0h — Micom MDL
MSP3420/MSP3452 (IC601) Slave Addr : 80h — MAIN
TEA6422D (IC605) Slave Addr : 98h — MAIN
TEA6425D (IC701) Slave Addr : 90h — MAIN
TEA6425D (IC702) Slave Addr : 96h — MAIN
PCF8591T (IC704) Slave Addr : 92h — MAIN
TCPN3081PC09A(S) (TU02) Slave Addr : C6h — MAIN
TCPN3081PC09A(S) (TU04) Slave Addr : C0h — MAIN
VSP9407 (IC01A) Slave Addr : B0h — Proscan MDL
CXA2151Q (IC02) Slave Addr : 84h — Proscan MDL
CXA2150AQ (IC04) Slave Addr : 86h — Proscan MDL
UPD64083GF (IC09) Slave Addr : B8h — Proscan MDL
SDC12 (IC01) Slave Addr : 20h — CG MDL
TSC87251G2D (IC06) Slave Addr : 20h — CG MDL

3. Specifications

Broadcasting System	NTSC
Scanning System	Progressive Scanning
Tuning Range	VHF : CH2 ~ CH13
Antenna Impedance	75 ohm Unbalanced
Intermediate Frequency	Video : 45.75 MHz Sound : 42.25 MHz Chrominance Subcarrier : 42.17 MHz
Sound Output	STD : 10W MAX : 15W
Rated Voltage	120V / 60 Hz
W/B Coordinates	Hx : 266 Hy : 280 Y : 8.9 Lx : 268 Ly : 283 Y : 0.38
High Voltage	29KV
FUSE	250V/6.3A CODE NO : 3601-000300
Power Consumption	240W
Dimension	1002 X 450 X 1070mm 39.4 X 17.7 X 42.1 inch
Weight	49Kg 108lbs

4. Alignment and Adjustments

4-1 When entering the service mode:

1. Turn on the TV, and then select “STANDARD”on the picture adjustment mode.
2. Turn off the TV (STAND-BY).
3. Enter the service mode by pressing the remote control keys in the following sequence :



Note : If necessary, re-do steps 1~3.

Initial display when the service mode is switched.

1. When a RF signal is received

SERVICE / Sim-474A

DEFLECTION
480P OFFSET
1080i OFFSET
CONVERGENCE OFFSET
VIDEO ADJUST 1
VIDEO ADJUST 2
VIDEO ADJUST 3
VIDEO ADJUST 4
OPTION (E3h 98h 0ch)
RESET / 02-05-03

3. Service Mode Control Keys

MAIN MENU	MENU DISPLAY
CH UP/DOWN	Select item by moving cursor
VOL UP/DOWN	Decrease or increase the adjustment values

< PRECAUTIONS >

1. When EEPROM IC (IC902) is replaced, first connect the power cord and wait for about 4~5 seconds.
2. After replacing EEPROM IC (IC902), enter the Service mode. Next, enter the standard data or the previous EEPROM IC data before replacement. And then check and adjust any items related to Geometric, Picture, Option.

4-2 Factory Data

☞ DVI connection item is corresponded to DVI application model.

4-2-1 Defection

ITEM	INITIAL DATA	Range	EEP-ROM Copy Data			Remark
			RF	480P	1080i	
V Amp		0 ~ 63	31	-	-	variable
V Shift	32	0 ~ 63	29	-	-	fix
H EW		0 ~ 63	31	-	-	variable
H Shift	32	0 ~ 63	31	-	-	fix
V Linearity	6	0 ~ 15	7	-	-	fix
Upper Linearity	7	0 ~ 15	0	-	-	fix
Lower Linearity	8	0 ~ 15	0	-	-	fix
VSC	3	0 ~ 15	7	-	-	fix
H Parabola	10	0 ~ 63	31	-	-	fix
Upper Corner	32	0 ~ 63	31	-	-	fix
Lower Corner	32	0 ~ 63	31	-	-	fix
H Trapezium	32	0 ~ 63	31	-	-	fix
Bow	32	0 ~ 63	31	-	-	fix
Angel	32	0 ~ 63	31	-	-	fix
V Position	32	0 ~ 63	31	-	-	fix
CXA Left Blk	35	0 ~ 63	35	-	-	fix
CXA Right Blk	35	0 ~ 63	35	-	-	fix

4-2-2 480P Offset

ITEM	INITIAL DATA	Range	EEP-ROM Copy Data			Remark
			RF	480P	1080i	
V Amp	0	-63 ~ 63	-	0	-	variable
V Shift	0	-63 ~ 63	-	0	-	variable
H EW	0	-63 ~ 63	-	0	-	variable
H Shift	0	-63 ~ 63	-	0	-	variable
V Linearity	0	-15~ 15	-	0	-	fix
Upper Linearity	0	-15~ 15	-	0	-	fix
Lower Linearity	0	-15~ 15	-	0	-	fix
VSC	0	-15~ 15	-	0	-	fix
H Parabola	0	-63 ~ 63	-	0	-	fix
Upper Corner	0	-63 ~ 63	-	0	-	fix
Lower Corner	0	-63 ~ 63	-	0	-	fix
H Trapezium	0	-63 ~ 63	-	0	-	fix
Bow	0	-63 ~ 63	-	0	-	fix
Angel	0	-63 ~ 63	-	0	-	fix
V Position	0	-63 ~ 63	-	0	-	fix
CXA Left Blk		-63 ~ 63	-	28	-	fix
CXA Right Blk		-63 ~ 63	-	36	-	fix

4-2-3 1080i Offset

ITEM	INITIAL DATA	Range	EEP-ROM Copy Data			Remark
			RF	480P	1080i	
V Amp	0	-63 ~ 63	-	-	0	variable
V Shift	0	-63 ~ 63	-	-	0	variable
H EW	0	-63 ~ 63	-	-	0	variable
H Shift	0	-63 ~ 63	-	-	0	fix
V Linearity	0	-15~ 15	-	-	0	
Upper Linearity	0	-15~ 15	-	-	0	
Lower Linearity	0	-15~ 15	-	-	0	
VSC	0	-15~ 15	-	-	0	
H Parabola	0	-63 ~ 63	-	-	0	
Upper Corner	0	-63 ~ 63	-	-	0	
Lower Corner	0	-63 ~ 63	-	-	0	
H Trapezium	0	-63 ~ 63	-	-	0	
Bow	0	-63 ~ 63	-	-	0	
Angel	0	-63 ~ 63	-	-	0	
V Position	0	-63 ~ 63	-	-	0	
CXA Left Blk		-63 ~ 63	-	-	63	
CXA Right Blk		-63 ~ 63	-	-	20	

4-2-4 CONVERGRNCE OFFSET

ITEM	INITIAL DATA	Range	EEP-ROM Copy Data			Remark
			RF	480P	1080i	
Offset Enable	0	0 ~ 1	0			variable
V Amp	15	-63 ~ 63	15			variable
V Shift	0	-63 ~ 63	0			variable
H EW	15	-63 ~ 63	15			variable
V Amp 1080i	15	-63 ~ 63	15			variable
V Shift 1080i	0	-63 ~ 63	0			variable
H EW 1080i	15	-63 ~ 63	15			variable

4-2-5 VIDEO ADJUST 1

ITEM	INITIAL DATA	Range	EEP-ROM Copy Data			Remark
			RF-Copy	W/B Control Value	1080i	
R Cutoff	20	0 ~ 63	31	20	31	variable
G Cutoff	20	0 ~ 63	31	20	31	variable
B Cutoff	20	0 ~ 63	31	20	31	fix
Color On/Off	1	0 ~ 1		1		
CR offset	32	0 ~ 15	32			fix
CB offset	32	0 ~ 15	32			fix
R Driver	31	0 ~ 15	20	31	20	variable
G Driver	31	0 ~ 15	20	31	20	fix
B Driver	31	0 ~ 63	20	31	20	variable
Sub Bright	15	0 ~ 63		15		variable
Sub Contrast	7	0 ~ 15		7		variable
Sub Color	20	0 ~ 23		20		
SubTint	7	0 ~ 13	8(AV/SV/DVD/480P)		10	fix
CTI Level	1	0 ~ 3	1 (RF/AV/SV/DVD/480P/1080i)			fix
CDL AXIS	2	0 ~ 3	2			fix
LTI Level	0	0 ~ 3	1(RF/AV/SV/DVD/480P)		2	fix

4-2-6 VIDEO ADJUST 2

ITEM	INITIAL DATA	Range	EEP-ROM Copy Data			Remark
			RF	480P	1080i	
ABL Mode	3	0 ~ 3	3			fix
Gamma	2	0 ~ 3	1			fix
DPIC Level	3	0 ~ 3	3			fix
DC Trans	3	0 ~ 3	1			fix
ABL TH	15	0 ~ 15	15			fix
VM Level	2	0 ~ 3	2			fix
VM Coring	0	0 ~ 3	0			
VM f0	0	0 ~ 3	2 (RF/AV/SV/DVD/480P)		1	fix
VM Limit	0	0 ~ 3	0			
VM Delay	0	0 ~ 3	0 (RF/AV/DVD)		1 (480P)	fix
SHP CD	1	0 ~ 3	1			
SHP f0	0	0 ~ 1	0	1 (AV/SV/DVD/Comp2)		fix
SHP f1 & P/O	11	0 ~ 15	13 1 (RF/AV/SVHS/DVD/Comp2)			fix
AKB Time	13	0 ~ 31	16			
Y/C Delay	30	0 ~ 31	30			
PIP Y/C Delay	30	0 ~ 31	30			
BAND PASS F	1	0 ~ 7	1			
HIGH PASS F	3	0 ~ 7	3			

4-2-7 VIDEO ADJUST 3

ITEM	INITIAL DATA	Range	EEP-ROM Copy Data			Remark
			RF	480P	1080i	
VSU	2	0 ~ 15	2	-	-	
Melody Volume	4	0 ~ 20	4	-	-	
H Comp	0	0 ~ 15	0	-	-	
V Comp	0	0 ~ 15	0	-	-	
Pin Comp	0	0 ~ 15	0	-	-	
AFC Comp	0	0 ~ 7	0	-	-	
Sync Comp	0	0 ~ 1	0	-	-	
NR Off Value	5	0 ~ 9	5	-	-	
V-Mute(x100ns)	8	0 ~ 10	8	-	-	

4-2-8 VIDEO ADJUST 4

ITEM	INITIAL DATA	Range	EEP-ROM Copy Data			Remark
			RF	480P	1080i	
System RF	1	0 ~ 3	1			
System_VSD_480P	1	0 ~ 3		1		
System_1080i	2	0 ~ 3			2	fix
Shp_Fo_VSD_480P	1	0 ~ 1		1		
HPF_VSD	3	0 ~ 7	3	3 (AVS/SV/DVD)		
BPF_VSD	1	0 ~ 7	1	1 (AVS/SV/DVD)		fix
Chrm_bdwth_RF	28	0 ~ 63	28			fix
Chrm_bdwth_Video	28	0 ~ 63	28			fix
Chrm_bdwth_Svideo	30	0 ~ 63	30			fix
Chrm_bdwth_DVD	28	0 ~ 63	28			fix
IF_Comp_RF	2	0 ~ 7	2			fix
IF_Comp_Video	4	0 ~ 7	4			fix
IF_Comp_Svideo	5	0 ~ 7	5			fix
IF_Comp_DVD	4	0 ~ 7	4			fix
VM_Delay_480P	1	0 ~ 3		1		fix

4-2-9 OPTION

ITEM	INITIAL DATA	Range	HCM4216W,HCM4215W, HCL4715WB,HCM4715W (PCL5415RB,PCM5415R) HCM5525WB,PTH5598W	HCM422W,HCM473WB (PCL545RB,PCM545R) HCM553WB
CRT	WIDE	WIDE ↔ 4:3	WIDE(4:3)	WIDE(4:3)
PIP	ON	ON ↔ OFF	ON	ON
3D-Comb Filter	OFF	ON ↔ OFF	OFF	ON
Blue Screen	OFF	ON ↔ OFF	ON	ON
BBE Effect	ON	ON ↔ OFF	ON	ON
Auto power On	ON	ON ↔ OFF	ON	ON
System	CT	CT (EN+SP+ER)→CT-A(E+SP+F)	CT	CT
Virtual Dolby	OFF	ON ↔ OFF	OFF	OFF
ACS	ON	ON ↔ OFF	ON	ON
V chip (CT,CTA)	ON	ON ↔ OFF	ON	ON
V chop Area	USA	USA	USA	USA
Sub Woofer	OFF	ON ↔ OFF	OFF	OFF
No Sync Mute	ON	ON ↔ OFF	ON	ON
DVI	ON	ON ↔ OFF	OFF	OFF
AGC	OFF	ON ↔ OFF	OFF	OFF
Tubo Effect	OFF	ON ↔ OFF	OFF	OFF
Burst Screen	OFF	ON ↔ OFF	OFF	OFF
DW Multi	Large	Large ↔ Double	Large	Double
Letter Box	ON	ON ↔ OFF	ON	ON

4-3 Screen Change (When adjusting I²C Bus Geometric items)

1 V SHIFT



6 V SIZE



2 V LINEARITY



7 V - S - CORRECTION

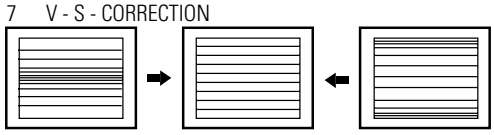

3 H SIZE



8 PIN PHASE



4 PIN AMP



9 H SHIFT

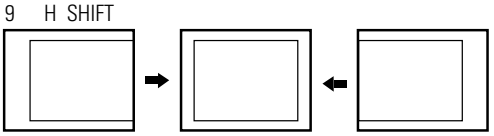

5 V ANGLE



10 V BOW



4-4 Other Adjustments

4-4-1 Screen Adjustment

1. Warm up the TV for at least 30 minutes.
2. Select the " STANDARD" Video mode.
3. Turn to the Video Mode (No Signal) using a remote-control.
4. Connect an oscilloscope to RK,GK,BK.
5. Adjust the VR (VR501, VR531, VR561) screen so that RK, GK, BK pulse is 20Vp-p each. (Turn the R,G,B VR screen fully counterclockwise in the area of each flyback line.)

4-4-2 White Balance Adjustment

1. Select the "STANDARD" video mode.
2. Input 100% white pattern.
3. In the stand-by mode, press the remote-control keys in the following sequence:

   

4. Warm up the TV for at least 30 minutes.
5. Input a 10-step signal.
6. R-cut off, B-cut off, and G-cut off by pressing the Volume keys.
7. Adjust the low light with viewing the dark side of the screen.
8. Select R-drive, G-drive, and B-drive by pressing the Volume keys.
9. Adjust the high light with viewing the light side of the screen.
10. If necessary, redo adjustments 6~9.
11. Press the Menu key to exit.

4-4-3 Sub-Brightness Adjustment

1. Input a sub-brightness adjustment signal. (TOSHIBA PATTERN)
2. In the stand-by mode, press the remote-control keys in the following sequence :

   

3. Select SBT by pressing the Volume keys.
4. Adjust so that the 63 step on the right side of the screen is not seen (Use the Volume keys).
5. Press the Menu key to exit.

4-4-4 High Voltage (29KV) Check

PRECAUTION

1. Input a lion head pattern.
2. Select "STANDARD" video mode.
3. Warm up the TV for at least 10 minutes.
4. Use a 1000:1 probe.

ADJUSTMENT

1. Connect the (+) terminal of the 1000:1 probe to the high voltage distributor and the (-) terminal to GND (located on the deflection board).
2. Adjust RR471S (located on the deflection board) so that the digital meter indicates DC 29V ± 0.1V.

4-4-5 F.S. (Fail Safe) Adjustment

Note : The finished product has a well-mounted VR (RR402S).
If necessary, do the F.S. adjustments in the following sequence.

1. Use a digital multimeter.
2. Connect the digital multimeter to the JIG pin (DZ482S) terminals
3. Adjust VR (RR402S) so that the voltage becomes 2.25V.
4. After the adjustments are complete, be sure to mount VR (RR402S) correctly.

4-4-6 F.S. (Fail Safe) Circuit Check

Note : The F.S. Circuit check must be performed after servicing.

1. Turn on the TV.
2. Select the “STANDARD” video mode.
3. Short F/S Test point (located on the SUB PCB). Then, both sound and picture disappear. (Note: Even if the shorted terminals are removed, both sound and picture do not appear. This proves the F.S. circuit is working.)
4. To restore both sound and picture, turn off the TV and reset it after about 30 seconds.

4-4-7 Static Focus Adjustment

PRECAUTION

1. Select the “STANDARD” video mode.
2. Input a crosshatch pattern.
3. Cover the lenses that are not being adjusted.
4. Connect a convergence jig and read data.
5. Adjust the lens for best focus. (See Fig, 4-1)

STATIC FOCUS (CONTINUED)

Vary the focus pack VR (Red, Blue) on the front cabinet. Adjust the TV for best possible focus around the center of the crosshatch pattern, without losing overall screen balance.
Figure Crosshatch Pattern
Examine these points together.



Fig. 4-1 Crosshatch Pattern.

4-4-8 Lens Focus Adjustment

PRECAUTIONS

1. Do this adjustment after the static focus adjustment and the tilt adjustment.
2. Select the “STANDARD” video mode. (Contrast:100, Brightness:50)
3. Input a crosshatch pattern.

ADJUSTMENT

1. Loosen the lens screws.
2. Cover the two lenses that are not being adjusted.
3. Adjust the lens, observing the color aberration vertically and horizontally within 3 blocks of the center of the crosshatch pattern.
4. When the lens is turned clockwise, the color aberration will change as follows:

Lens	Color Aberration Change
R	Orange - Crimson
G	Blue - Red
B	Purple - Green

5. Green lens adjustment:
Set the lens at the point where Blue just changes to Red. If the color aberration is irregular throughout the picture screen, adjust the lens to show Red color aberration (approximately 1~3 mm area) within a 3-block grid around the horizontal center-line. If the color aberration is irregular, adjust the lens as shown in the diagram below. (Accurate alignment of Green is important for overall color quality.)
6. Red lens adjustment
Set the Red lens at the point where Orange becomes Crimson.
7. Blue lens adjustment
Set the Blue lens at the point where Purple becomes Green.



Fig. 4-2 Color Aberration

4-5 Beam alignment Adjustments

1. Select the “STANDARD” video mode.
2. Warm up the set at least for 10 minutes.
3. Enter the Convergence mode by pressing the remote control buttons in the following sequence
   : (Mute) → ① → ⑧ → ③
4. Set the Beam Alignment Adjustment CY to Zero magnetic field area.

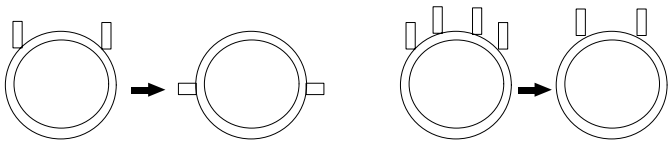

(Creation of CPM Zero Magnet) (Creation of the 2-pole/4-pole zero magnets)

5. Check the squarewave at the point where the focus is misaligned (Use an audio oscillator).
6. Press the PIP button on the remote control, and a vibrating dot-pattern appears.
7. Adjust the Focus-pack VR for defocusing.
8. Mute the other patterns (R/B) other than G-PATTERN.
   (Use +100 / Pre-CH buttons on the remote control.)
9. Adjust the 2, 4 polarities of VM-COIL as shown in figure below.
10. Adjust the G-Focus until any light around the core disappears.

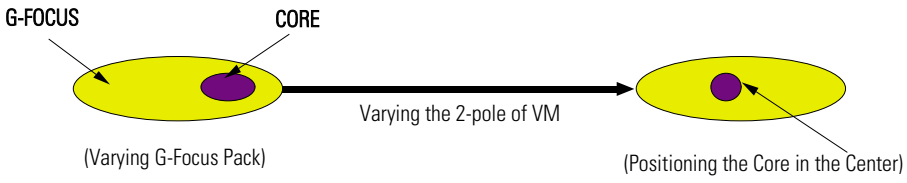

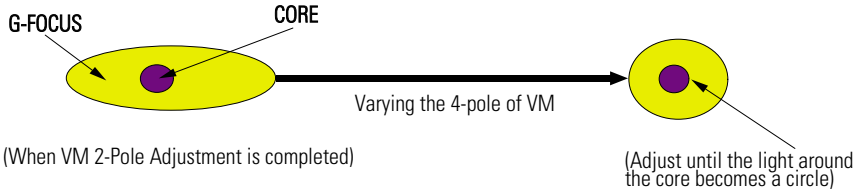
G-FOCUS
CORE
Varying the 4-pole of VM
(When VM 2-Pole Adjustment is completed)
(Adjust until the light around the core becomes a circle)

11. Adjust G-Focus so that the surrounding flash can disappear from the spot.
12. After G-Focus adjustments are complete, adjust R-Focus as above procedures.
13. The B-CRT adjustments can be omitted because the variance of beam focus is small.
    (Only Vm-coil is mounted.)
14. Adjust the Focus-pack VR for fine focusing.
15. Press the PIP button on the remote control, and the mode changes to the Convergence Adjustment mode.
16. Press the S.Mode button on the remote control to return to normal viewing.

4-6 Hige Voltage Part

4-6-1 PWM REG Circuit

For the existing high voltage REG circuit (input voltage variation type), a dynamic REG response is not provided. So it is difficult for both beam linearity and uniformity in screen size to be maintained on the screen with rapidly changing beams.

A PWM (Pulse Width Modulation) type of high voltage, however, provides the maintenance of beam linearity and uniformity in screen size via a quick response to beam change by performing sync lock every 1H line, and detecting beam fluctuation at 1H line, and then controlling the IC current of high voltage output circuit.

1. High Voltage Fluctuation Detect (DC Detect)

   FBT pin 11 detects DC high voltage fluctuation. The detected DC high voltage value is input to PWM IC471 pin1 through R473, VR471, R471, and then it is input to a differential AMP circuit that differentiates the gap after comparing with the reference voltage input to pin2.

2. High Voltage Fluctuation Detect (AC Detect)

   To check AC high voltage fluctuation, the output from FBT is detected by using a capacitor inside the high voltage distributor. The detection of AC high voltage fluctuation, a detection of dynamic beam current change is required in order to keep beam linearity and uniformity in size.
   Regarding the capacitor, a capacity of less than 3000P should be applied to a PWM type. (The existing type needs a capacity of about 6000P.)
   AC detect circuit eliminates unnecessary high frequency by using C476, D472. Also, AC gain is limited to + / - 0.7V (D472). This AC gain is combined with the detection value of DC high voltage fluctuation by using C478.

3. PWM IC OSC Sync Lock

   A PWM type IC needs sync lock for PWM pulse and horizontal scan line.
   The standard time constant of OSC circuit is determined by C487, R475 (PWM IC pins 5 and 6). And the standard OSC frequency is about 27 kHz . The horizontal frequency of scan line is 31.5kHz(NT), 3375kHz(DTV), 15.75kHz(Interface), so sync lock for this horizontal frequency should be performed using sync lock circuit. The sync lock circuit consists of Q481(Tr KSC815-Y), D479, D478, and C492. The input AFC signal is connected to PWM IC pin 5 through D479 so that it can be negative Trig.

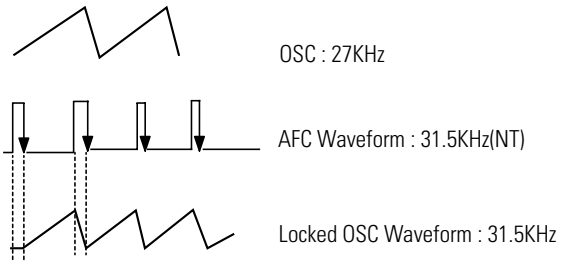

4. Dead Time (HV Protect)

   Dead Time (PWM IN pin4) consists of C481, delays high voltage for a certain time to soft start in power on, a x-ray protection circuit.
   The voltage of Dead Time is detected by FBT pin7 and through DC Feedback. The normal voltage of Dead Time is +27V. When high voltage increases, however, detected voltage is in proportion to high voltage. Then, the detected voltage is applied to ICR01S(TL431).
   If the voltage is over 2.5V (normal:about 2.25V), TL431 turns ON, the base port of QR401S becomes low, and then an emitter current flows. At this time, a high voltage protection point is set. When QR401S turns ON, high voltage is applied to PWM IC pin4 and then muted.

5. Output Circuit

The voltages, which are detected form an error detection circuit of PWM IC (Differential AMP) and Dead Time, each is applied to PWM conparator . Due to these detection coltages, Q1, Q2 (Output TR) parallel operate. Q482 (External TR), however, functions as a buffer; natches inpedance between the output port of PWM IC and the final output TR(IRFS640). The PWM pulse (applied to the final output FET (IRFS640 GATE) varies the IC current of high voltage TR(Q473) by adjusting the load impedance of starage Trans (T431). Due to this variation of current, the gain for Q473 emitter pulse changes T444(FBT)makes this emitter pulse became high voltage. Such change keeps both dynamic and static changes fixed. The output waveform of high valtage TR emitter is as shown in the figure below.

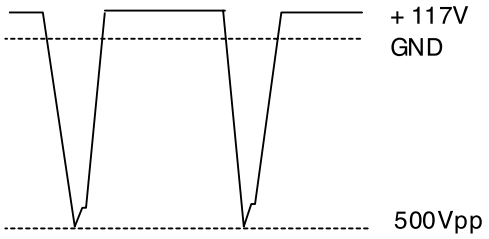

6. Paraneters according to beam

To maintain the set high voltage value (31kV), parmaters such as +Ve (DC), Vcp High Voltage change (See the table below).

Factor of high voltage change	Parameters			
	Width of FET Gate Pulse	+ Ve (DC)	Vcp	High Voltage
Beam ↓ (High voltage ↑)	↓	↑	↓	↓
Beam ↓ (High voltage ↑)	↑	↓	↑	↑

7. Response Waveform

To reduce unstable high voltage fluctuation, the existing high voltage type REG circuit controls dynamic fluctuation by using C-block capacitor. But, it can't detect actual dynamic fluctuation. Also, its velocity of response to static fluctuation is late because +B power supply changes per about 1V. A PWM modulation type REG detects static, dynamic high voltage fluctuation for only Ton Time (when the current of the output TR collector flows) each 1H, and modulates the width of PWM pulse. So, this PWM type has better improvement in the characteristic of high voltage REG as compared to the existing type.

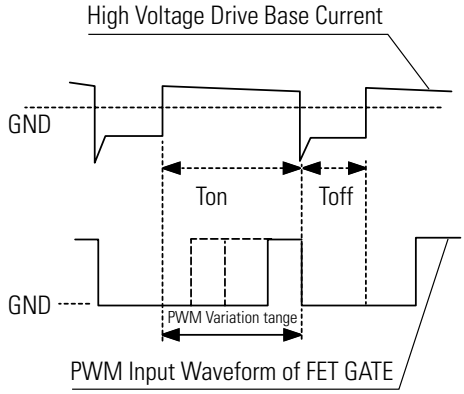

8. Application Effects

1) Improvement of horizontal size fluctuation
2) Linearity improved
3) Embodiment of X-ray protection circuit

The figures below show characteristics when a PWM high voltage REG circuit is applied.

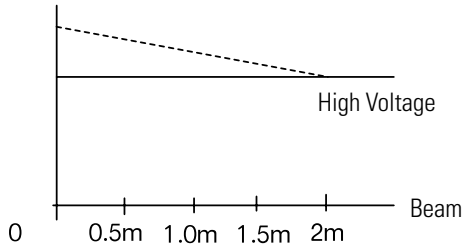





PWM type



When a Toshiba Pattern is recrived, the screen is displayed as shown in figute side

Existing type

4-7 Screen-Jig

4-7-1 HCM4215W/HCM422W/HCM4216W (NORMAL MODE)

42W5ScreenSize:X932,Y524(X:378=9*2+30*12,Y:440=28*2+64*6)

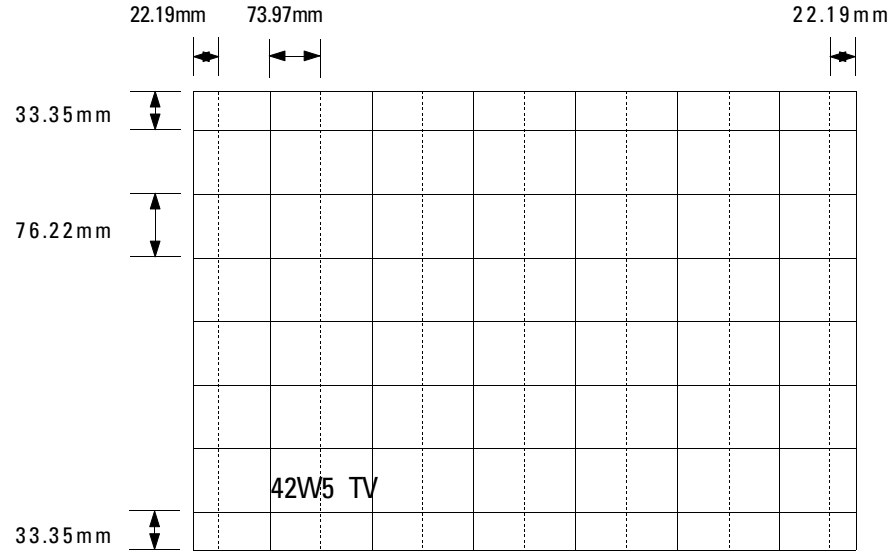

4-7-2 HCM4215W/HCM422W/HCM4216W (DTV MODE)

42W5 DTV Mode : X 932, Y 524 (X:408=18*2+31*12, Y:488=40*2+68*6)

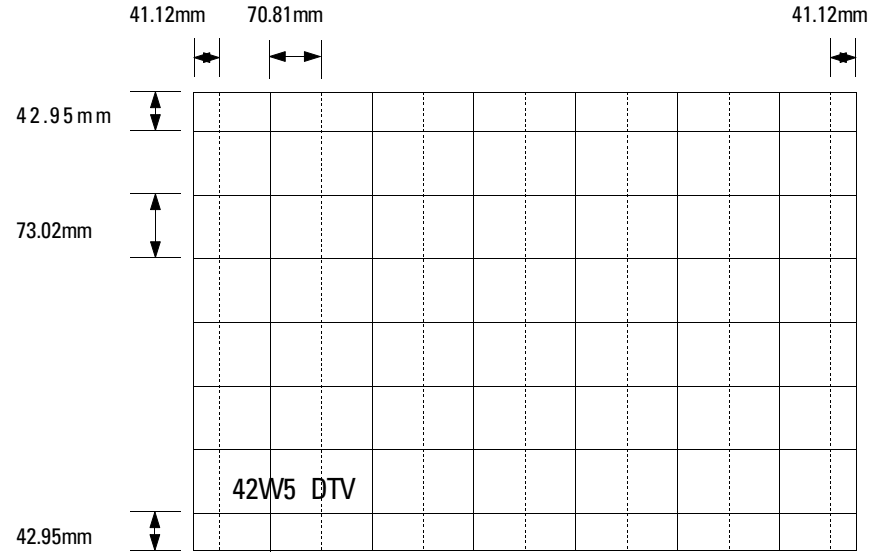

4-7-3 473W/4715W (NORMAL MODE)

Screen Size : X 1019.4 Y 573.4(X:378=9*2+30*12, Y:440=28*2+64*6)

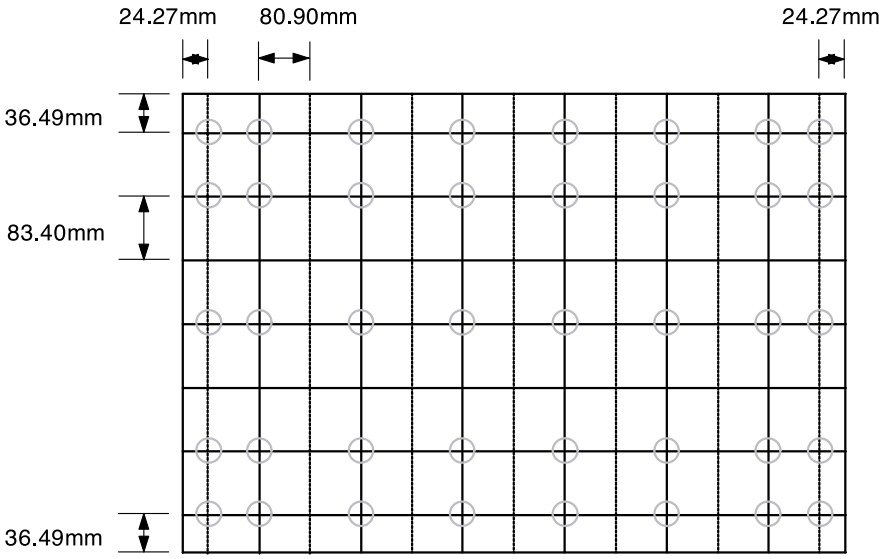

Note: "O" Cursor Point

4-7-4 473W/4715W (DTV MODE)

Screen Size : X 1019.4 Y 573.4 (X:378=9*2+30*12, Y:488=40*2+68*6)

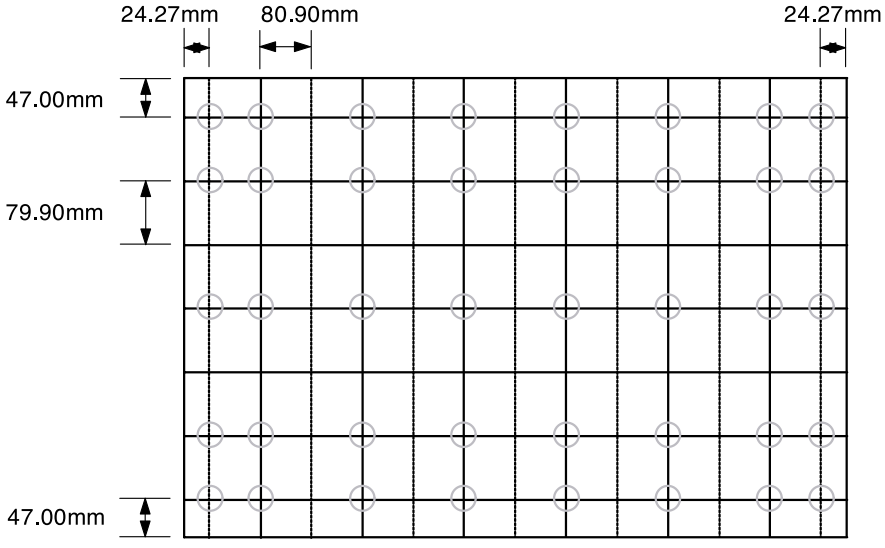

Note: "O" Cursor Point

4-7-5 5415R/545R/54J9 (NORMAL MODE)

Screen Size : X 1098.4, Y 827.4 (X:378=9*2+30*12, Y:440=28*2+64*6)

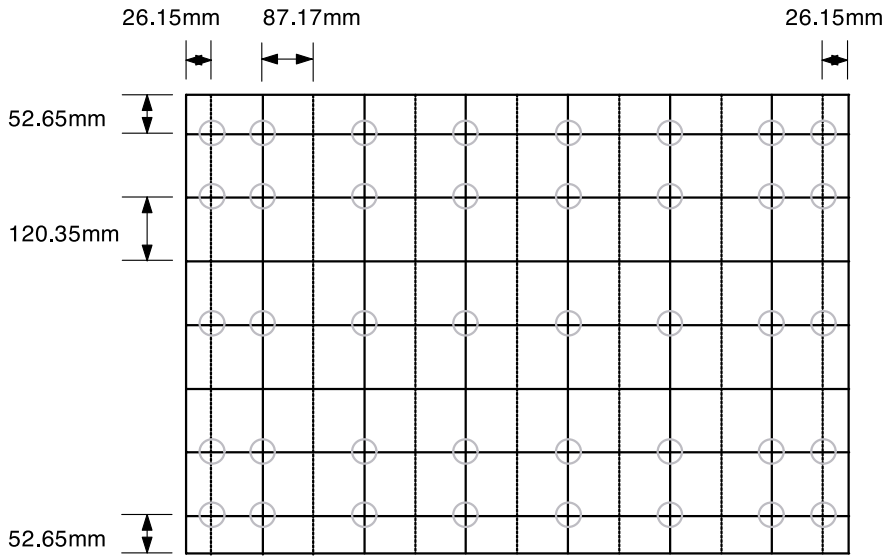

Note: "O" Cursor Point

4-7-6 5415R/545R/54J9 (DTV MODE)

Screen Size : X 1098.4, Y 627.4(X:378=9*2+30*12, Y:488=40*2+68*6)

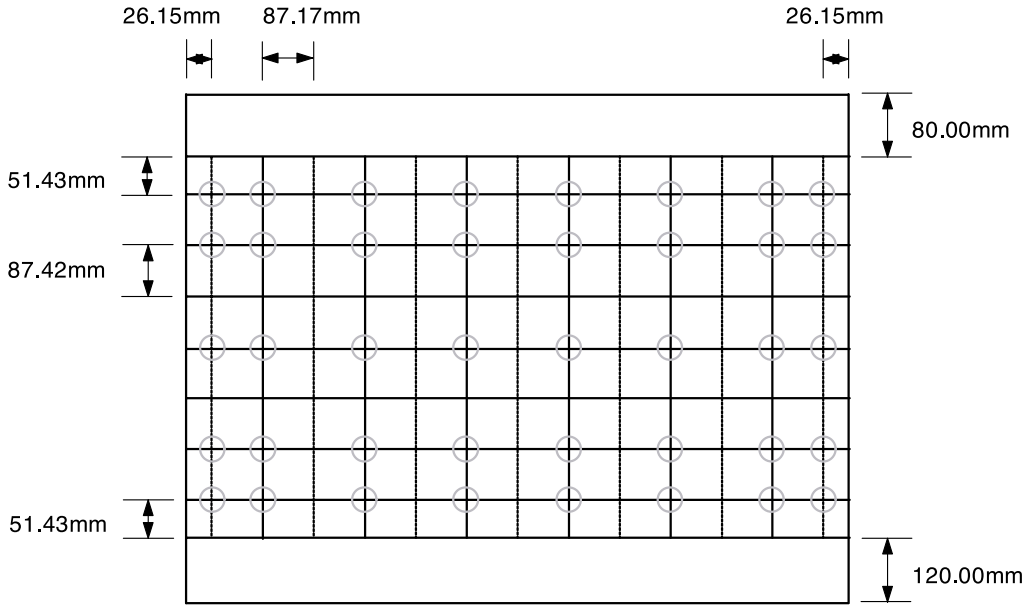

Note: "O" Cursor Point

4-7-7 552W/5515W/5525W/553W/PTH5598 (NORMAL MODE)

Screen Size : X 1215, Y 680 (X:378=9*2+30*12, Y:440=28*2+64*6)

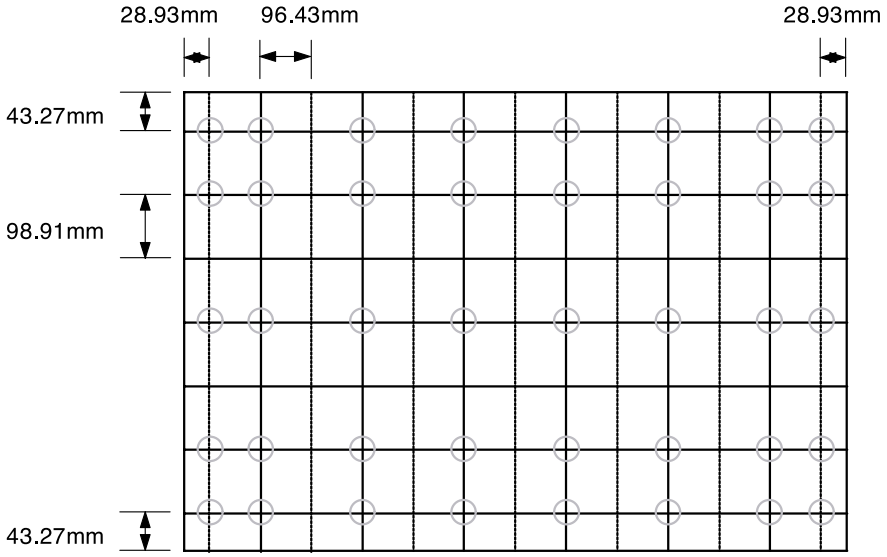

Note: "O" Cursor Point

4-7-8 552W/5515W/5525W/553W/PTH5598 (DTV MODE)

Screen Size : X 1215, Y 680 (X:378=9*2+30*12, Y:488=40*2+68*6)

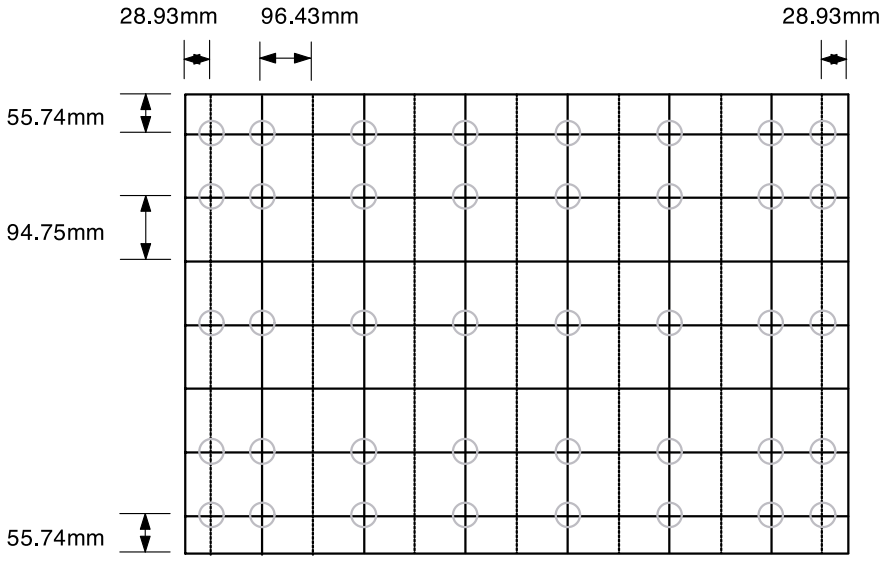

Note: "O" Cursor Point

4-7-9 6215R (NORMAL MODE)

Screen Size : X 1253, Y 943 (X:378=9*2+30*12, Y:440=28*2+64*6)

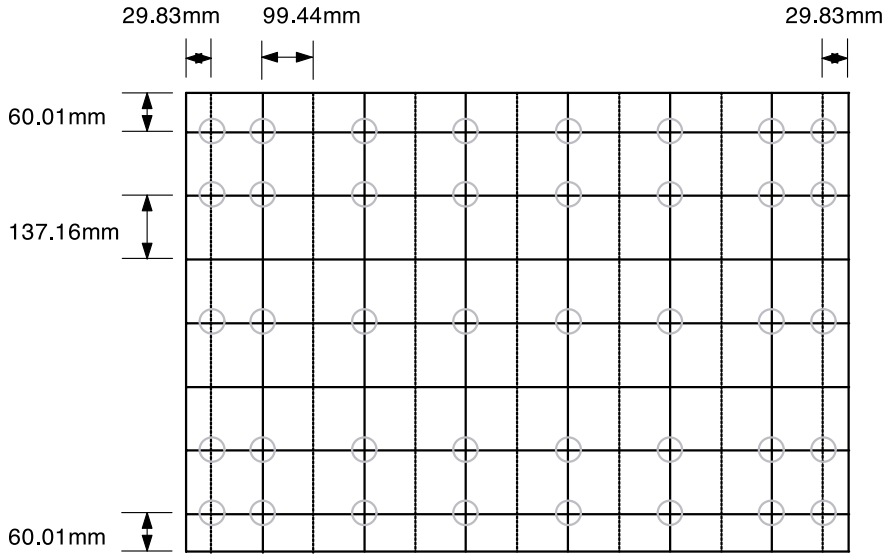

Note: "O" Cursor Point

4-7-10 6215R (DTV MODE)

Screen Size : X 1253, Y 688+90+165(X:378=9*2+30*12, Y:488=40*2+68*6)

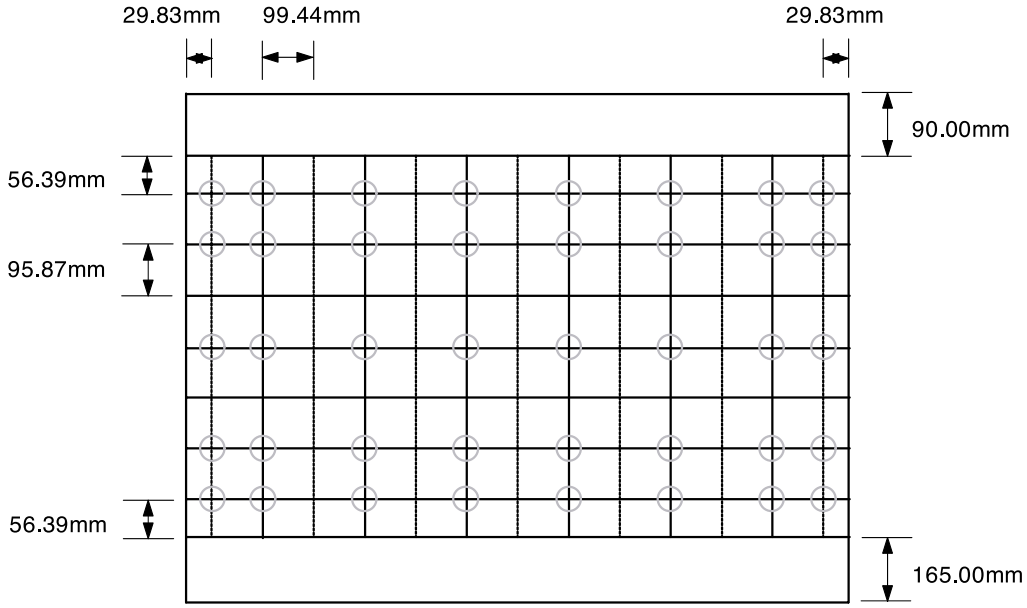

Note: "O" Cursor Point

4-7-11 652W/653W/6515R (NORMAL MODE)

Screen Size : X 1444, Y 832 (X:378=9*2+30*12, Y:440=28*2+64*6)

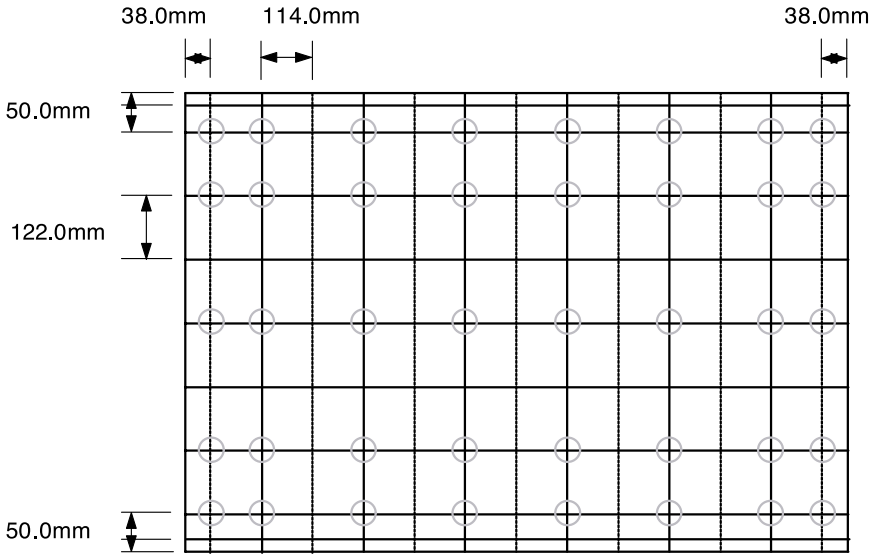

Note: "O" Cursor Point

4-7-12 652W/653W/6515R (DTV MODE)

Screen Size : X 1444, Y 832 (X:378=9*2+30*12, Y:488=40*2+68*6)

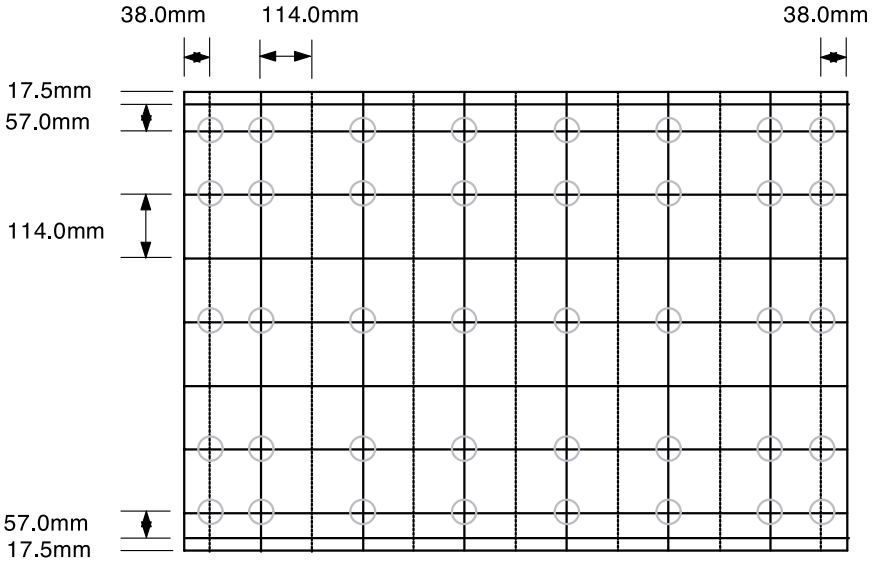

Note: "O" Cursor Point

4-8 Remote Control for Servicing (Convergence Mode)

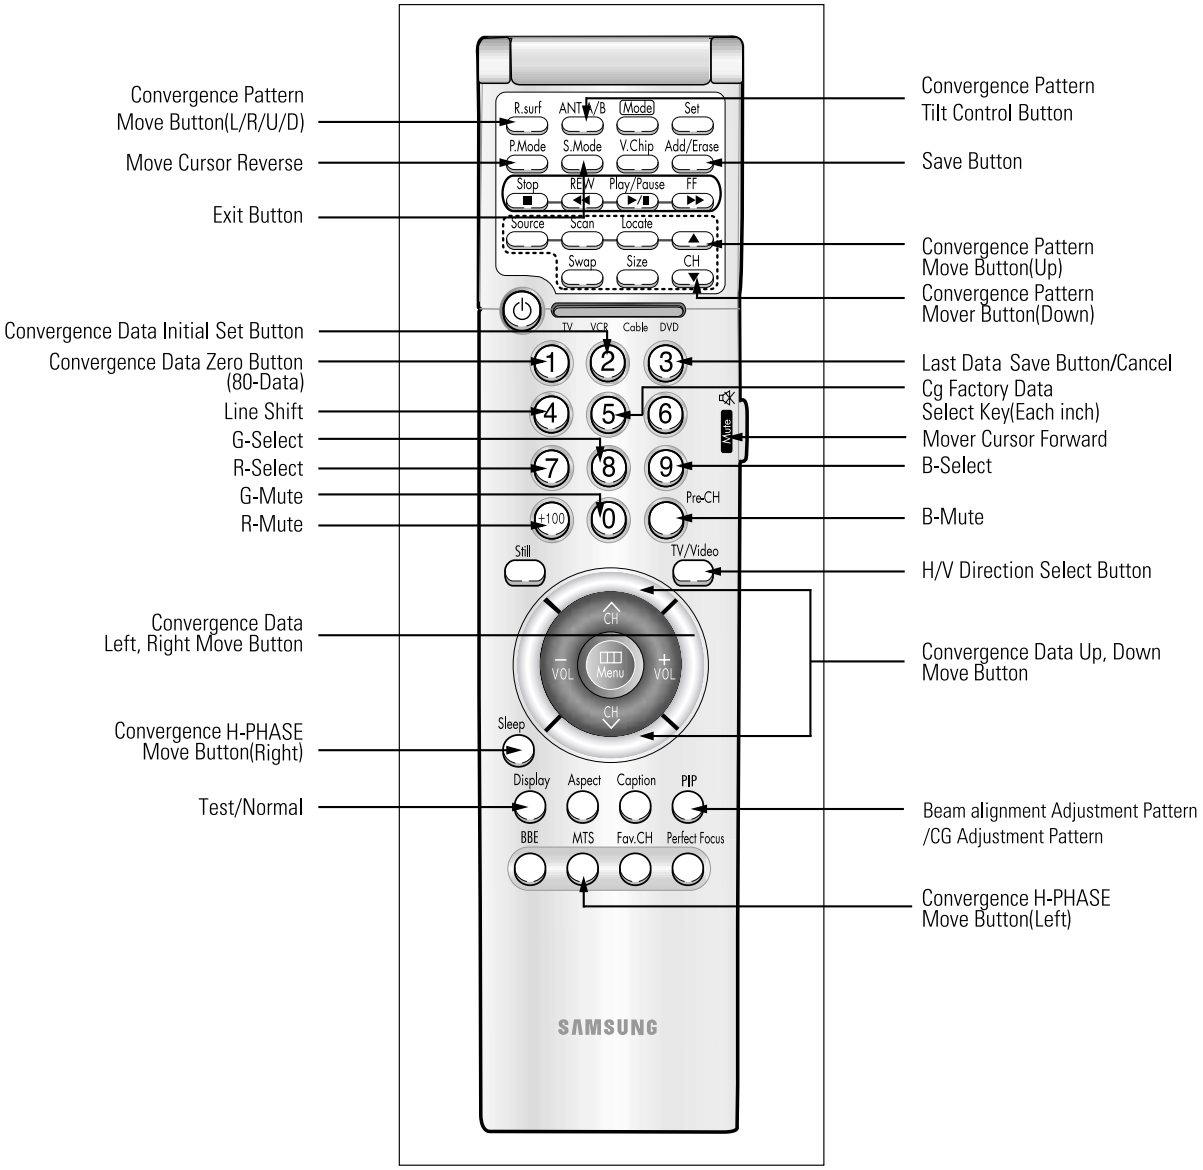

4-7-1 KEY Function

1. R-SELECT (7)
   Press to select RED color.

2. G-SELECT (8)
   Press to select GREEN color.

3. B-SELECT (9)
   Press to select BLUE color.

4. R-MUTE (+100)
   Press to mute RED color.

5. G-MUTE (0)
   Press to mute GREEN color.

6. B-MUTE (Pre-CH)
   Press to mute BLUE color.

7. CANCEL KEY (3)
   Press to revert to the previous data during the Convergence Adjustment.

8. TEST / NORMAL (Display)
   Press to check TV mode in the Convergence Mode.

9. LINE SHIFT (4)
   Press to move a line up / down or left / right.

10. FACTORY DATA SELECT BUTTON (2)
    Press to call the factory default values.

11. H / V DIRECTION SELECT BUTTON (TV/Video)
    Press to switch the cursor direction horizontally or vertically.

12. SAVE BUTTON (Add/Erase)
    After the Convergence Adjustments are completed, press to save data.

13 EXIT BUTTON (S.Mode)
   After the Convergence adjustments are completed, press to exit to TV mode.

14. MOVE CURSOR FORWARD (Mute)
Press to move the cursor right or down.

15. MOVE CURSOR REVERSE (P.Mode)
Press to move the cursor left or up.

16. CONVERGENCE PICTURE MOVE BUTTON

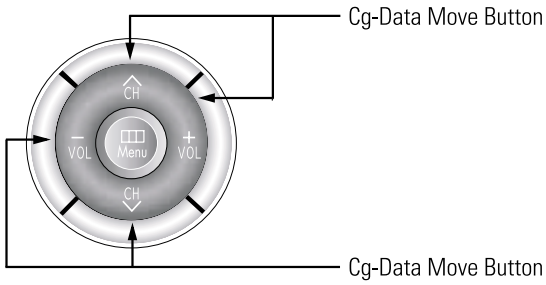

17. CONVERGENCE MOVE BUTTON (MTS / Sleep)
Press to move the convergence left ( ) or right ( ) .

18. CONVERGENCE DATA ZERO BUTTON (1)
Press to zero the convergence correction data.

19. INITIAL DATA SET BUTTON (2)

Changes when applying Almighty-Cg, Module (How to extract the basic Cg Data)

Inch (Type)	Model Name	Basic Data	Screen Display	Discription
	Representative Model	Number after entring the Cg-Mode		
42″ (42W5)	422W/4215W 42W5/4216W	5-425 (Press in regular order)		
54″ (54J9)	PCL545R/ PCL5415R	5-545 (Press in regular order)		White Cross on the background (white cross)
62″ (62J9)	PCL6215R	5-625 (Press in regular order)		
55″ (552W)	HCL552W/ 5515W	5-552 (Press in regular order)		White Oval on the background (white border)
65″ (652W)	HCL652W/ 6515W	5-652 (Press in regular order)		White Oval on the background (white border)
47″ (472W) (473W)	HCL472W/ 4715W	5-473 (Press in regular order)		White Square on the backgrand (white border)
65″(653W)	HCM653W	5-653 (Press in regular order)		White Square on the backgrand (white border)
55″(553W)	HCM5525W/ 553W	5-553 (Press in regular order)		White Square on the backgrand (white border)

20. Move Convergence Pattern P55A Service Manual

After pressing the R.surf button, use the Channel Up / Down and Volume + / - buttons to move the Convergence Pattern up / down / left / right.

21. Convergence Pattern Tilt Control Button

After pressing the ANT A / B button, use the Channel Up / Down and Volume + / - buttons to create a tilt to the Convergence Pattern.



Note : Use the following two buttons only when they are indispensable.

21. Beam aligment Adjustment Pattern achieve Button

4-8 Convergence Adjustment

4-8-1 Convergence Adjustment)

NOTE Special Notes

✏ A sensor is attached on the center of each side of the Convergence Mode pattern (see figure below). The sensors are required for normal Perfect Focus function.

✏ Use a screen jig to do the convergence adjustments correctly (Especially, perform correct convergence adjustments on the center of each side where a sensor is located.)

✏ Do the convergence adjustments correctly. Otherwise, any Perfect Focus error can happen.

1. Warm up the TV for a least 30 minutes.

2. Input an NTSC Signal.(Use an antenna or AV source.)

NOTE Make sure that deflection yoke are properly adjusted so that the center of Green, Red, Blue pattern is aligned on the center of screen jig.

3. Enter the Convergence Mode by Pressing the remote control keys in the following sequence:

Mute → 1 → 8 → 3

NOTE If OSD displayed as shown in figure below, press the S.Mode key to exit.
Then, redo step 3 to enter the Convergence Mode.
After entering the Convergence Mode, Stand by for about five seconds before doing the adjustments.

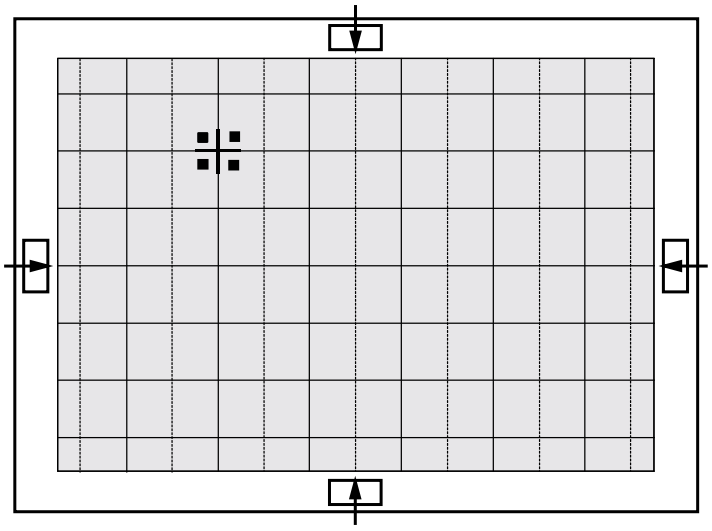

4. To adjust GREEN, first press the +100 and the Pre-CH keys, and then press the 8 key. Press to move the cursor right or down.



5. The TV/Video key moves the cursor horizontally or vertically.

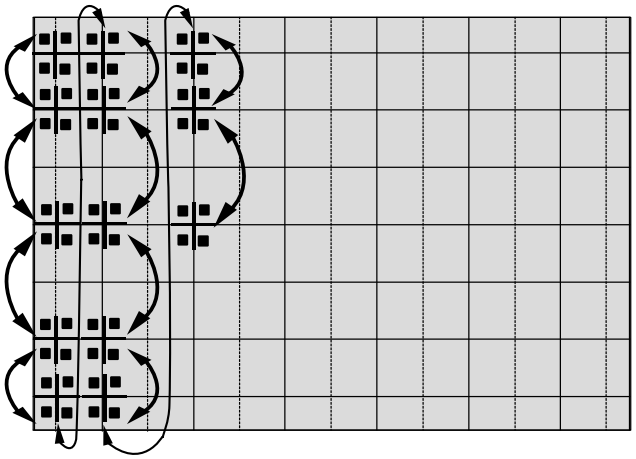

NOTE When the TV/Video key is pressed once again, the cursor moves horizontally.

6. . The Mute key moves the cursor right, and the P.Mode key moves the cursor left.

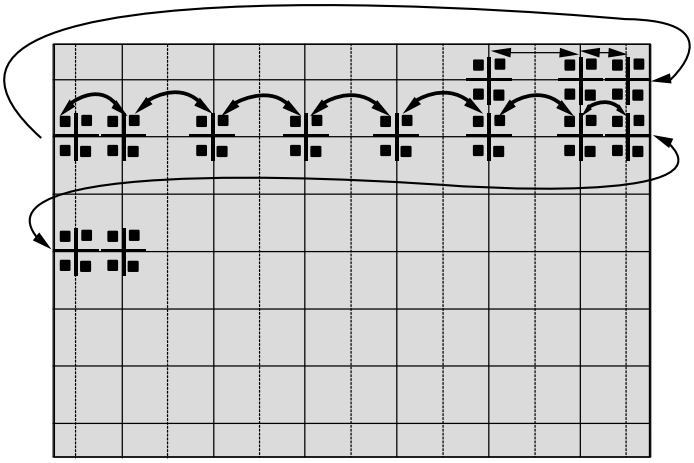

7. Use the (4) key for overall balance.

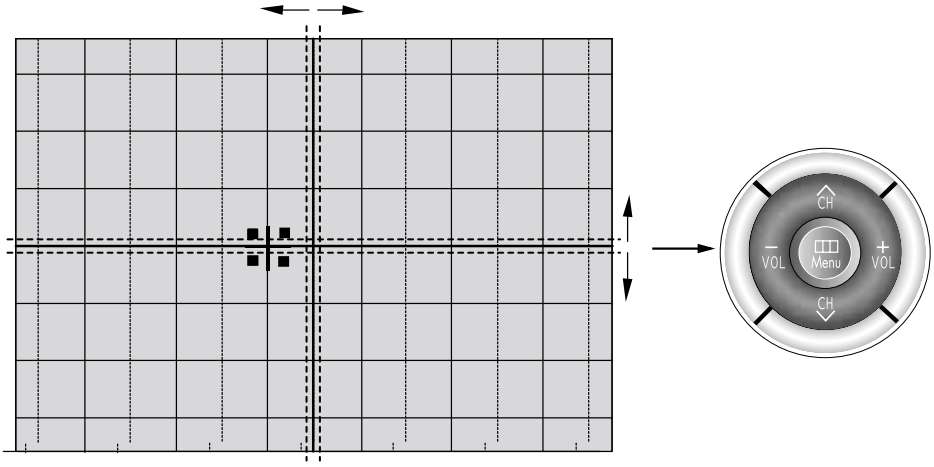

8. After the Line Shift is cancelled by pressing the (4) key, use the Channel and Volume keys (Up / Down)to make big adjustments.

9. After the green convergence adjustments are completed, press the Add/Erase key to save the data.

10. Superimpose the Red and Green colors by pessing the +100 and the 7 keys.

11. To adjust RED, redo steps 5~7.

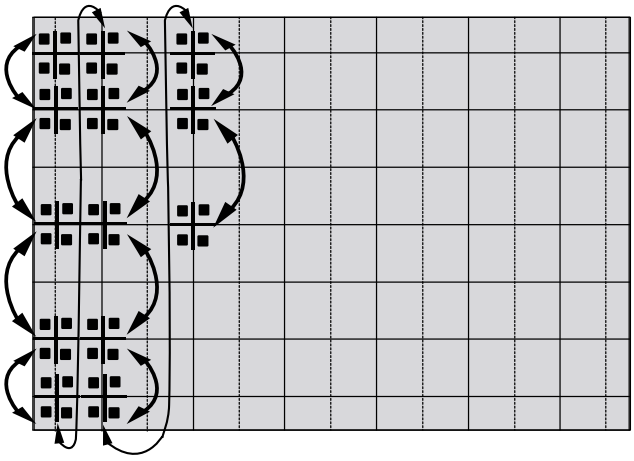

When the cursor moves vertically TV/Video

12. To superimpose the blue and green colors, press (1) the +100 key for R-Mute, (2) the Pre-CH key to cancel the B-Mute, and (3) the 9 key for B- select

13. To adjust BLUE, redo steps 5~7, 13.

14. If any color is not properly adjusted when displaying the red, blue and green colors, readjust the color.

15. After the color adjustments are completed, pree the (Add/Erase) key to save the data.

NOTE

The corser moves to center, and then automatically moves up and to the left about five seconds later.

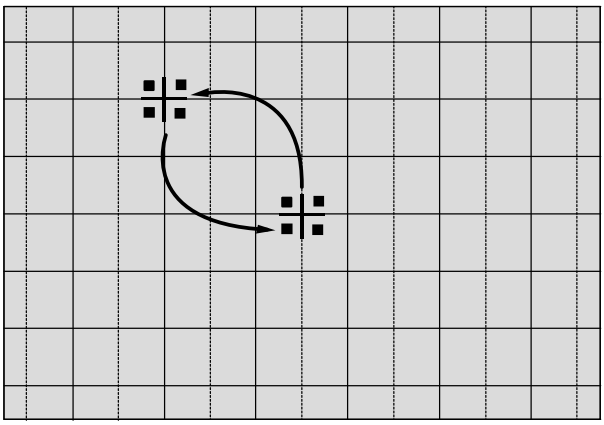

4-8-2 Perfect Focus (Factory Mode)

1. After the adjustment is completely saved, press the perfecr Focus key to perform Auto Convergence (Factory Mode). Auto Covergence is porformed in the following sequences :

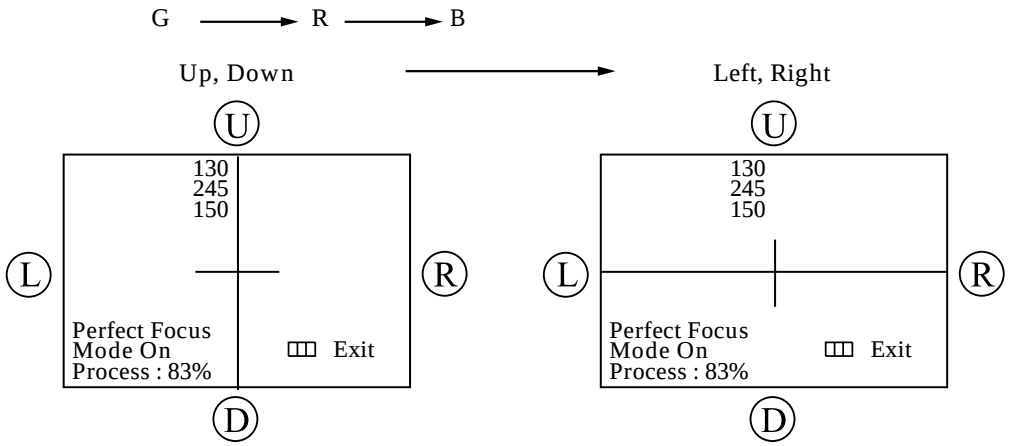

When auto Convergence is complete, the data is automatically saved and the convergence pattern revets.

NOTE

- After Factory Auto convergence is complete, make sure that the cursor flickers for about 1 second on the center and then it is saved.
- Check the presence of error though the flicker of the cursor.
- When any error happens, be sure to re-do Factory Auto Convergence.
- When Convergence Adjustment is not normally done or the convergence center is misaligned with the sensing point, any adjustment error happens. Therefore, be sure to use a screen jig to correctly adjust during troubleshooting.

2. After the Convergence Adjustments are completde, press the S.Mode key to exit.

3. DTV Convergence adjustment must be done same as the above Normal Mode Convergence Adjustment (Use a 16 : 9 screen jig for DTV)

When Convergence Adjustment is not normally done or the convergence center is misaligned with the sensing point, any adjustment error happens. Therefore, be sure to use a screen jig to correctly adjust during troubeshooting.

4-9 MICOM and Pins Voltage

4-9-1 MICOM MODULE Pins

PIN NO	ITEM	FUNCTION	VOLT
1	KEY 1	KEY SCAN 1	2.28[V]
2	PRO TECT	PROTECT PORT	0.83[mV]
3	KEY 2	KEY SCAN 2	2.25[V]
4	GND	GND	-
5	KEY 3	KEY SCAN 3	2.29[V]
6	STB-5[V]	VCC	4.91[V]
7	IR IN	REMOCON INPUT	3.74[V]
8	POWER	POWER ON/OFF RELAY CONTROL	1.03[V]
9	TIMER-LED	TIMER LED	2.07[V]
10	1080 i	1080i MODE SWITCHING	2.53[V]
11	GND	GND	-
12	V-RESET	VIDEO SIGNAL MUTE	2.84[mV]
13	SCL1	SERIAL CLOCK LINE 1	3.43[V]
14	GND	GND	-
15	SDA1	SERIAL DATA LINE 1	3.49[V]
16	S-RESET	SOUND RESET	4.21[V]
17	ST-BY-LED	STANDY-BY LED	2.95[V]
18	RESET	RESET	2.47[V]
19	AMP-MUTE	SOUND AMP MUTE	0.89[mV]
20	N.C	N.C	-
21	GND	GND	-
22	SW1	SW1 (CONTROL)	4.58[V]
23	SCL2	SERIAL CLOCK LINE 2	3.27[V]
24	C-SPK-MUTE	CENTER SPEAKER MUTE	3.26[V]
25	SDA2	SERIAL DATA LINE 2	3.27[V]
26	SW3	SW3 (CONTROL)	5[mV]
27	GND	GND	-
28	SW2	SW2 (CONTROL)	2.08[V]
29	SUB-AFT	SUB AFT CONTROL	2.57[V]
30	GND	GND	-
31	MAIN-AFT	MAIN TUNER AFT CONTROL	1.04[V]
32	BUS-STOP	I^2C BUS STOP	3.27[V]

	ITEM	FUNCTION	VOLT
33	5[V]	5[V]	4.96[V]
34	J-BLANK	HORIZONTAL BLANK	215.8[mV]
35	GND	GND	-
36	V-BLANK	VERTICAL BLANK	-12.10[mV]
37	2RF-S	2RF-SWITHING	297.68[mV]
38	GND	GND	-
39	GND	GND	-
40	N.C	N.C	-
41	VS1	VERTICAL SYNC	-
42	N.C	N.C	-
43	HS1	HORIZONTAL SYNC	215.51[mV]
44	N.C	N.C	-
45	GND	GND	-
46	S-SW1	SUB TUNER SWITCH 1	3.74[V]
47	TTX-CVBS	TTX/CAPTION-CVBS	1.19[V]
48	GND	GND	-
49	GND	GND	-
50	S-SW2	SUB TUNER SWITCH 2	-
51	AV-LINK	NOT USE	-
52	M-SW1	MAIN TUNER SWITCH 1	-
53	GND	GND	-
54	M-SW2	MAIN TUNER SWITCH 2	-
55	RXD	RXD	-
56	GND	GND	-
57	TXD	TXD	-
58	OSD-TTX-R	ON SCREEN DISPLAY RED	168[mV]
59	GND	GND	-
60	OSD-TTX-G	ON SCREEN DISPLAY GREEN	0.46[V]
61	WP	WRITE PROTECT	-
62	OSD-TTX-B	ON SCREEN DISPLAY BLUE	0.46[V]
63	3.3[V]	3.3[V]	3.26[V]
64	OSD-TTX-FB	OSD/TTX-FB	7.31[mV]

4-9-2 PROSCAN MODULE Pins

PIN NO	ITEM	FUNCTION	VOLT
1	EW	EAST WEST OUT	2.26[V]
2	V-BLK	VERTICAL BLANK	-12.07[mV]
3	ABL	ABL(Automtic Brightness Limiter)	2.26[V]
4	VD-	VERTICAL DRIVE (- VOLTAGE)	3.46[V]
5	VD+	VERTICAL DRIVE (+ VOLTAGE)	3.53[V]
6	H-BLK	HORIZONTAL BLANKING	215.93[mV]
7	HD	HORIZONTAL DRIVE	2.38[V]
8	GND	GND	-
9	OSD/TTX-FB	OSD/TTX-FB	7.29[mV]
10	OSD/TTX-B	ON SCREEN DISPLAY BLUE IN	0.46[mV]
11	OSD/TTX-G	ON SCREEN DISPLAY GREEN IN	0.46[mV]
12	OSD/TTX-R	ON SCREEN DISPLAY RED IN	167.99[mV]
13	V-RESET	VIDEO SIGNAL MUTE	2.94[mV]
14	GND	GND	-
15	SCL1	SERIAL CLOCK LINE	3.42[V]
16	SDA1	SERIAL DATA LINE	3.50[V]
17	HS1	HORIZONTAL SYNC	251.4[mV]
18	VS1	VERTICLA OUT	27.28[mV]
19	GND	GND	-
20	CG-R	CONVERGENCE RED	0.27[mV]
21	CG-G	CONVERGENCE GREEN	0.27[mV]
22	CG-B	CONVERGENCE BLUE	0.29[mV]
23	CG-SYNC	CONVERGENCE SYNC	180.03[mV]
24	D/F	DYNAMIC FOCUS	1.5[V]
25	GND	GND	-
26	9[V]	9[V]	9[V]
27	GND	GND	-
28	N.C	N.C	-
29	RXD	RXD	-
30	TXD	TXD	-
31	GND	GND	-
32	13.5[V]	13.5[V]	14.05[V]

	ITEM	FUNCTION	VOLT
33	5[V]-DW1	5[V]-DW1	4.97[V]
34	VM-Y	VM-Y OUTPUT	1.97[V]
35	SW3	SW3 (CONTROL)	4.98[mV]
36	SW2	SW2 (CONTROL)	2.08[V]
37	SW1	SW1 (CONTROL)	4.58[V]
38	GND	GND	-
39	PIP-C	PIP-C INPUT	1.20[mV]
40	PIP-Y/C CVBS	PIP-Y/CVBS INPUT	1.33[mV]
41	GND	GND	-
42	MAIN-C	MAIN-C INPUT	1.34[mV]
43	MAIN-Y/C CVBS	MAIN-Y/CVBS INPIUT	1.57[mV]
44	N.C	N.C	-
45	GND	GND	-
46	N.C	N.C	-
47	GND	GND	-
48	RF2-CVBS	RF1-CVBS	-
49	DVD-Pr/R	DVD-Pr/R (COMPONENT1)	-
50	DVD-Y/G	DVD-Y/G (COMPONENT1)	-
51	DVD-Pb/R	DVD-Pr/B (COMPONENT1)	-
52	FB	NOT USE	-
53	GND	GND	-
54	DTV1-Pr	DTV1-Pr (COMPONENT3)	-
55	DTV1-Y	DTV1-Y (COMPONENT3)	-
56	DTV1-Pb	DTV1Pb (COMPONENT3)	-
57	GND	GND	-
58	DTV2-Pr	DTV2-Pr (COMPONENT3)	-
59	DTV2-Y	DTV2-Y (COMPONENT3)	-
60	DTV2-Pb	DTV2-Pb (COMPONENT3)	-
61	GND	GND	-
62	5[V]-DW2	5[V]-DW2	4.89[V]
63	DVI-ID	N.C	-
64	PC-ID	N.C	-

4-9-3 CONVERGENCE MODULE Pins

PIN NO	ITEM	FUNCTION	VOLT
1	5[V]-CG	5[V]-CG	5.2[V]
2	GND	GND	-
3	D/F	DYNAMIC FOCUS	1.5[V]
4	GND	GND	-
5	SCL1	SERIAL CLOCK LINE 1	3.4[V]
6	CG-SYNC	CONVERGENCE SYNC	179[mV]
7	GND	GND	-
8	N.C	N.C	5.2[V]
9	CG-R	CONVERGENCE RED	0.27[mV]
10	CG-G	CONVERGENCE GREEN	0.26[mV]
11	CG-B	CONVERGENCE BLUE	0.29[mV]
12	SDA1	SERIAL DATA LINE 1	3.5[V]
13	N.C	N.C	-
14	IR	INPUT REMOCON	3.7[V]
15	N.C	N.C	-
16	GND	GND	-
17	GND	GND	-
18	GND	GND	-
19	BV	BULE VERTICAL OUT	34.27[mV]
20	BH	BULE HORIZONTAL OUT	-107.32[mV]
21	GV	GREEN VERTICAL OUT	101.52[mV]
22	GH	GREEN HORIZONTAL OUT	-15.83[mV]
23	RV	RED VERTICAL OUT	104.32[mV]
24	RH	RED HORIZONTAL OUT	-88.95[mV]
25	GND	GND	-
26	H-BLK	HORIZONTAL BLANK	275[mV]
27	V-BLK	VERTICAL BLANK	-13.22[mV]
28	GND	GND	-
29	N.C	N.C	-
30	-5[V]	-5[V]	-4.99[V]
31	5[V]	5[V]	5.24[V]
32	GND	GND	-

5. Troubleshooting

5-1 Convergence Misaligned

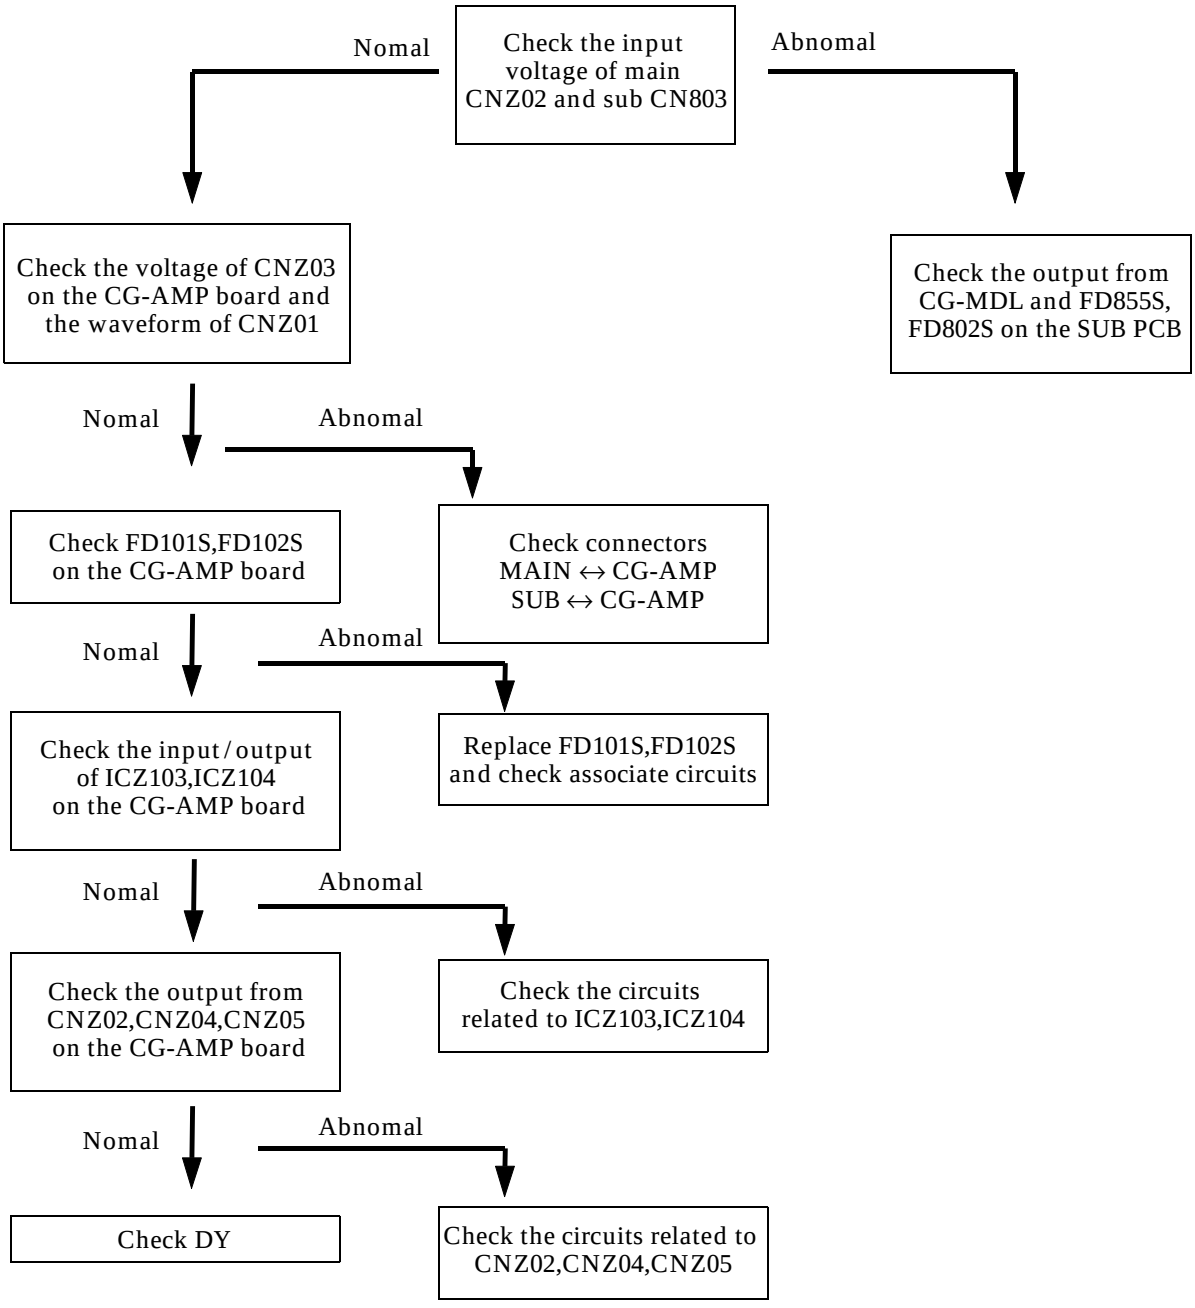
Check the input voltage of main CNZ02 and sub CN803
Nomal
Abnomal
Check the voltage of CNZ03 on the CG-AMP board and the waveform of CNZ01
Check the output from CG-MDL and FD855S, FD802S on the SUB PCB
Nomal
Abnomal
Check FD101S,FD102S on the CG-AMP board
Check connectors MAIN ↔ CG-AMP SUB ↔ CG-AMP
Nomal
Abnomal
Check the input/output of ICZ103,ICZ104 on the CG-AMP board
Replace FD101S,FD102S and check associate circuits
Nomal
Abnomal
Check the output from CNZ02,CNZ04,CNZ05 on the CG-AMP board
Check the circuits related to ICZ103,ICZ104
Nomal
Abnomal
Check DY
Check the circuits related to CNZ02,CNZ04,CNZ05

5-2 No Sound

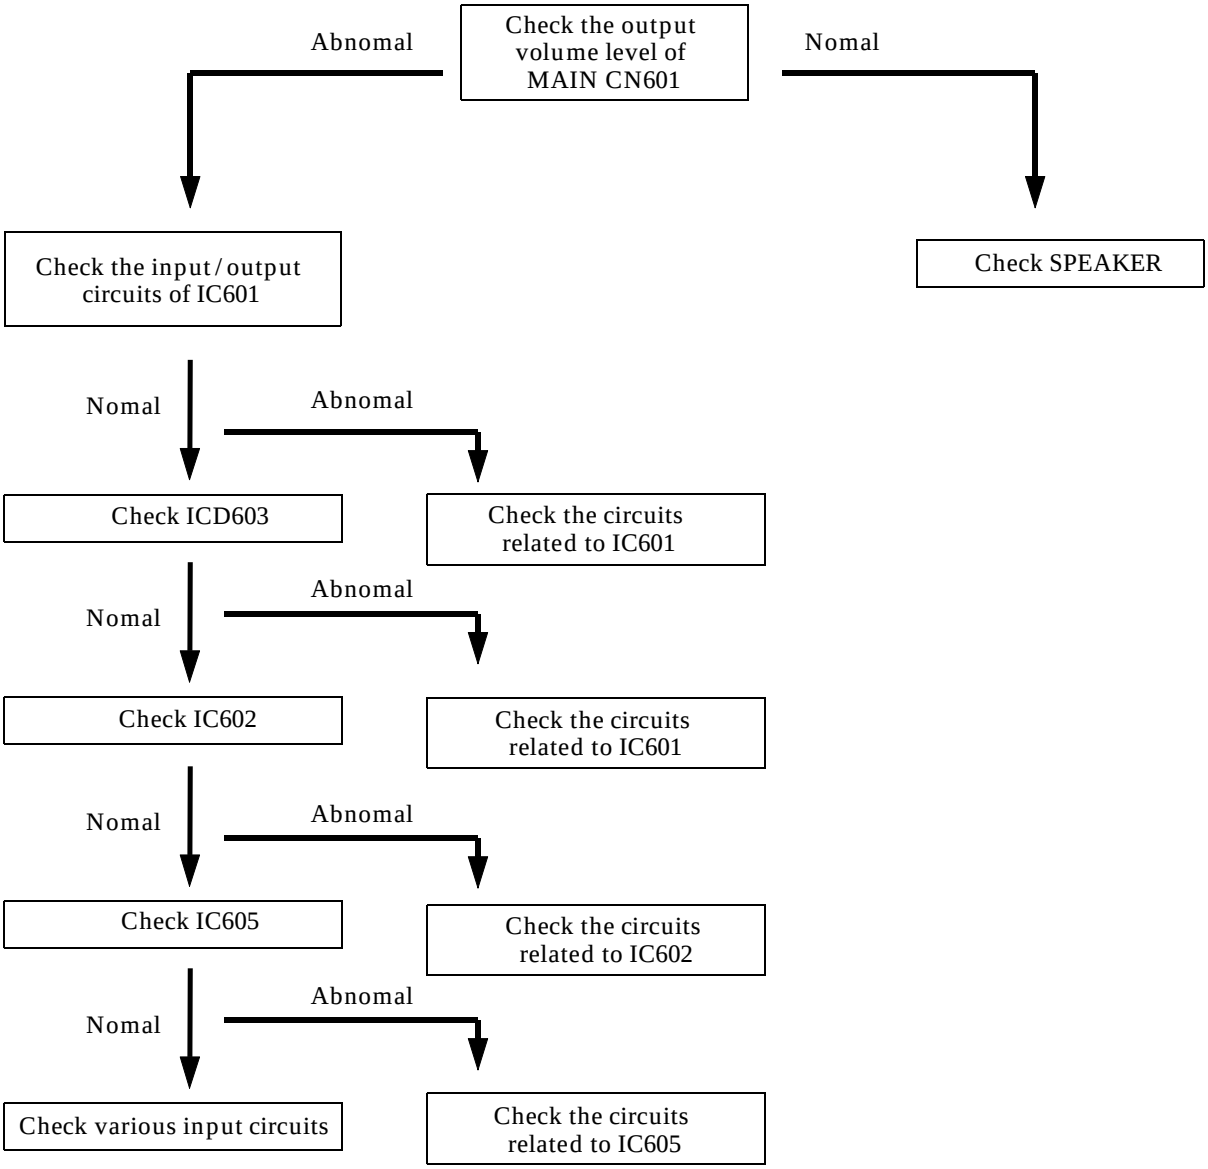
Check the output volume level of MAIN CN601
Abnomal
Nomal
Check the input / output circuits of IC601
Check SPEAKER
Nomal
Abnomal
Check ICD603
Check the circuits related to IC601
Nomal
Abnomal
Check IC602
Check the circuits related to IC601
Nomal
Abnomal
Check IC605
Check the circuits related to IC602
Nomal
Abnomal
Check various input circuits
Check the circuits related to IC605

5-3 No Raster

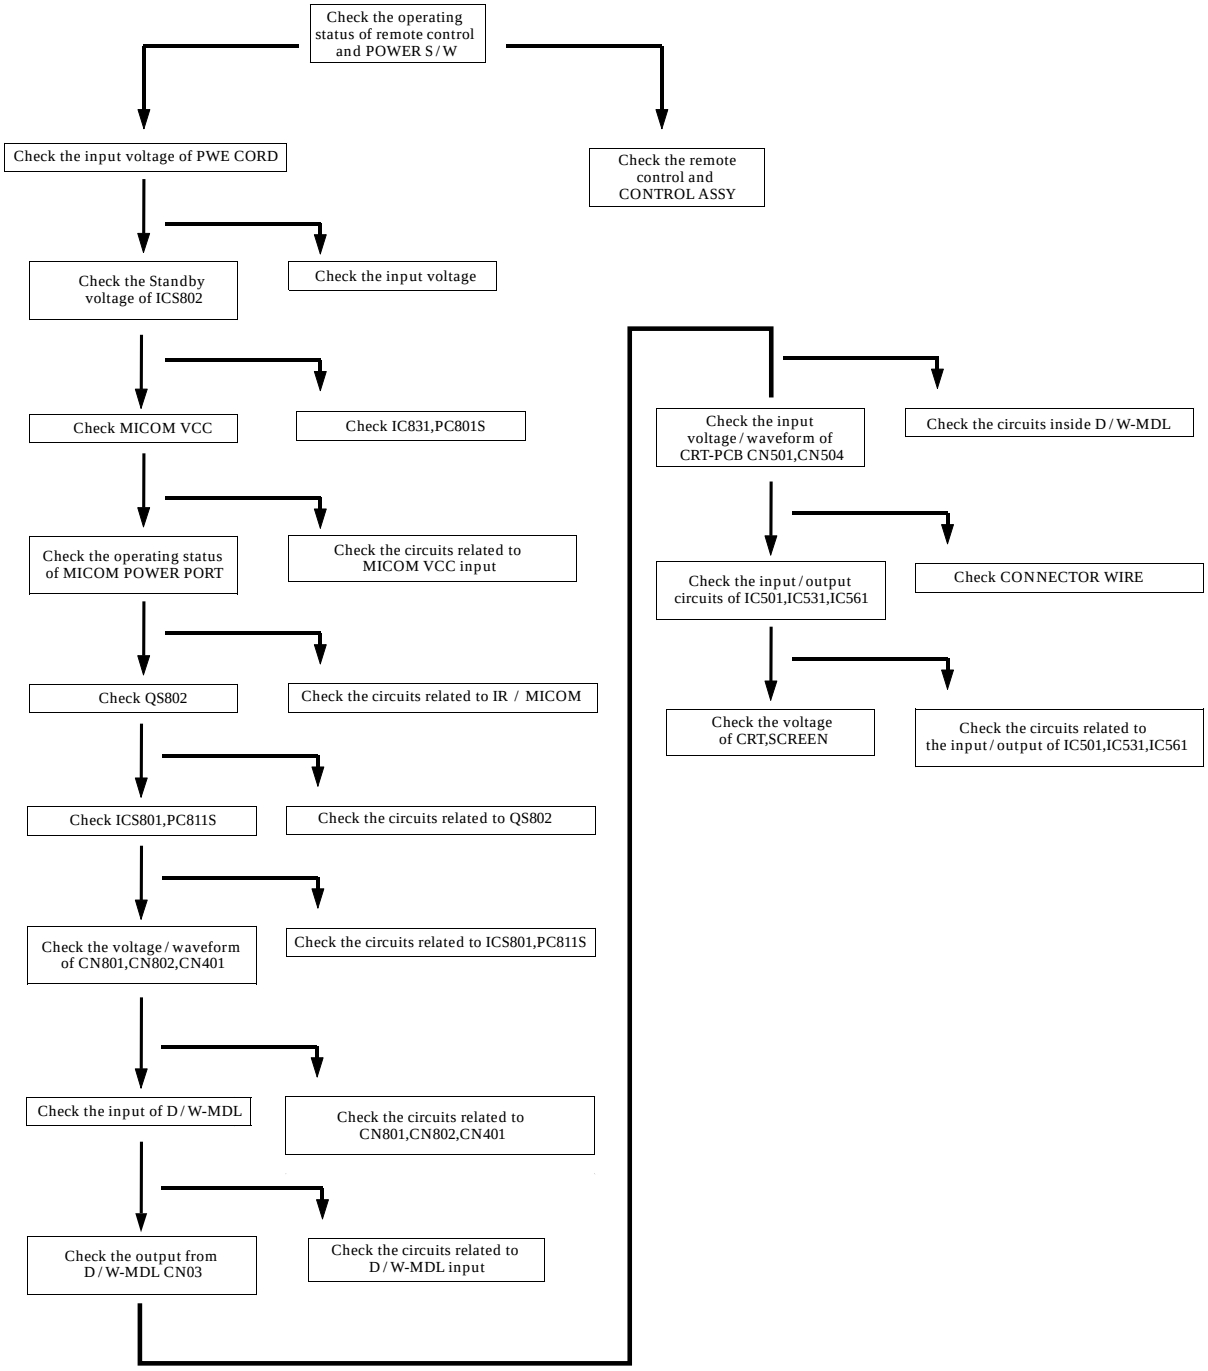
Check the operating status of remote control and POWER S/W
Check the input voltage of PWE CORD
Check the remote control and CONTROL ASSY
Check the Standby voltage of ICS802
Check the input voltage
Check MICOM VCC
Check IC831,PC801S
Check the operating status of MICOM POWER PORT
Check the circuits related to MICOM VCC input
Check QS802
Check the circuits related to IR / MICOM
Check ICS801,PC811S
Check the circuits related to QS802
Check the voltage / waveform of CN801,CN802,CN401
Check the circuits related to ICS801,PC811S
Check the input of D/W-MDL
Check the circuits related to CN801,CN802,CN401
Check the output from D/W-MDL CN03
Check the circuits related to D/W-MDL input
Check the input voltage / waveform of CRT-PCB CN501,CN504
Check the circuits inside D/W-MDL
Check the input/output circuits of IC501,IC531,IC561
Check CONNECTOR WIRE
Check the voltage of CRT,SCREEN
Check the circuits related to the input/output of IC501,IC531,IC561

6. Exploded View & Parts List

6-1 HCN4226WX/XAA

You can search for the updated part code through ITSELF web site.
URL : http://itself.sec.samsung.co.kr

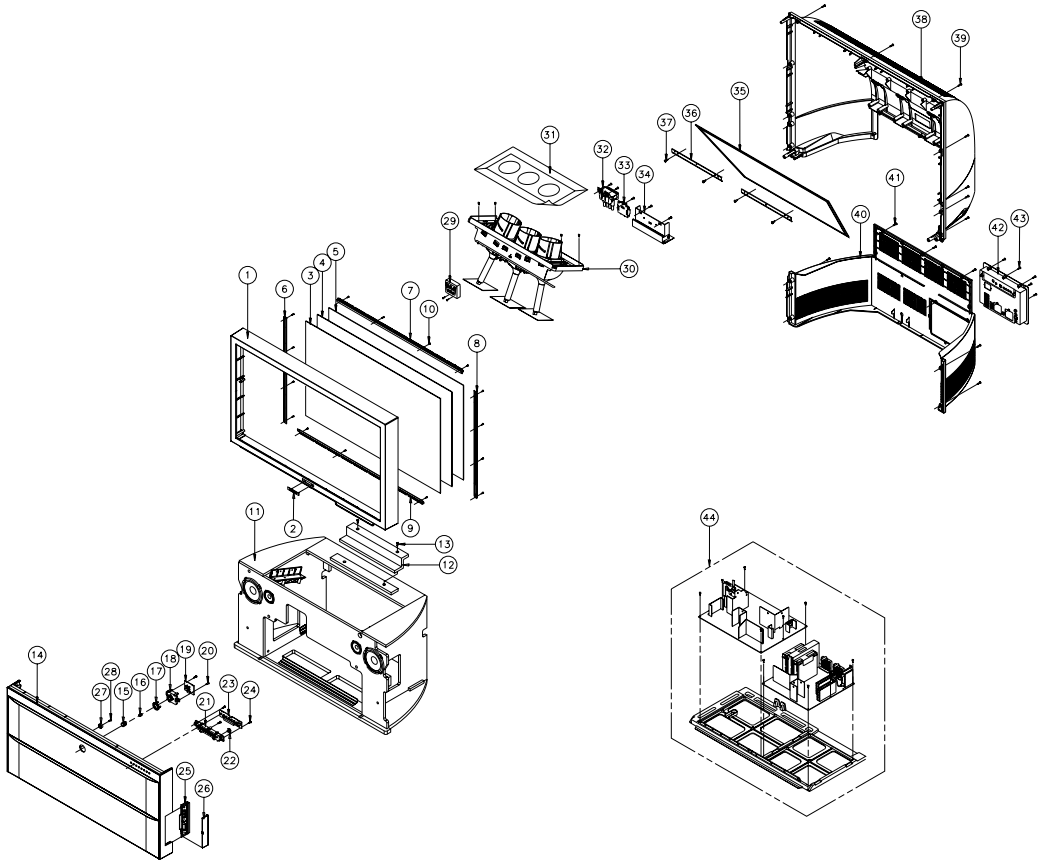

No	Code No	Description;Specification	Q'ty	Remark	S.N.A
1	BP91-00006Q	ASSY-FRONT MASK;42W8,SV012P,HIPS,HB,GRY,	1	T0004	S.N.A
2	BP64-00199A	BADGE-BRAND;PJLCD,AL,T1.5,72,12.5,,DGN-S	1	T0057	S.N.A
3	AA67-00207A	SCREEN-FILTER;,T=82%,9,G=110,AG	1	T0052	
4	AA67-00193A	SCREEN-TINT;42W,958*550,T=0.7,P	1	T0056	
5	AA67-00193B	SCREEN FRESNEL;42W,960*552,T=2.0	1	T0053	
6	BP61-00025D	BRACKET-SCREEN,ASSY(R);42W5,SECC,T1.0,NE	1		S.N.A
7	BP61-00023E	BRACKET-SCREEN,ASSY(TOP);42W5,SECC,T1.0	1		S.N.A
8	BP61-00026D	BRACKET-SCREEN,ASSY(L);42W5,SECC,T1.0,NE	1		S.N.A
9	BP61-00024E	BRACKET-SCREEN,ASSY(BOT);42W5,SECC,T1.0,	1		S.N.A
10	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	20	T0081	S.N.A
11	BP91-00005D	ASSY-CABINET,WOOD;,WOOD,MIJU,42W5	1	T0257	S.N.A
12	BP64-00029A	INLAY-SUPPORT;42W5,PS SHEET,T0.5,94V0	1		S.N.A
13	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	2	HC+CW	S.N.A
14	BP64-00230A	CABINET FRONT-BOT;42W8,HIPS V0,GRAY,SV70	1		S.N.A
15	BP64-00231A	KNOB POWER;42W8,ABS,HB,GRAY,AL	1	T0023	S.N.A
16	AA61-60003A	SPRING ETC-CS;-,SUS304,-,-,OD7,N7,OD7,-,	1	CIS7	S.N.A
17	BP61-00273A	HOLDER-RING;42W8,ABS,GRAY,AL	1		S.N.A
18	BP61-00272A	HOLDER-PCB POWER;42W8,ABS,SMOG,6G	1		S.N.A
19	BP94-00515A	ASSY PCB MISC-POWER-SW;HCN4226WX/XAA,P55	1	T0097	
20	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	2	T0081	
21	BP64-00233A	KNOB CONTROL;42W8,ABS,HB,GRAY,SVM1132	1	T0022	S.N.A
22	BP64-00232A	WINDOW-RMC;42W8,ABS,HB,CLEAR	1		S.N.A
23	BP94-00505Z	ASSY PCB MISC-CONTROL;HCN4226WX/XAA,P55A	1	T0098	
24	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	3	T0081	
25	AA61-01128C	HOLDER-SIDE AV;42W5,ABS HB,G3676,SV-704P	1		S.N.A
26	AA64-02780C	DOOR-AV;42W5,ABS HB,G3676,SV-704P	1	T0150	
27	AA61-01133A	VELCRO-B;COMMANDO,BST1 1/4H	1		S.N.A
28	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	1	T0081	
29	BP59-00005A	MODULE-FOCUS PACK ASS'Y;PJT TV,F301-P03A	1	T0103	
30	BP91-00423A	ASSY PRT;HCM4215WX/XAA,P55A,ASSY-PRT	1		S.N.A
31	AA60-00072B	SPACER-COVER,DUST;43,54,62J9,SPONGE 94HF	1		S.N.A
32	AA26-00101A	TRANS FBT-H/V DISTRIBUTOR;FWZ50A001E/FFA	1	T0118	
33	AA94-08270A	ASSY PCB MISC-DY JACK;COMMANDO	1	T0105	
34	AA95-02002A	ASSY SUB-PCB,CG AMP;COMMANDO	1	T0094	
35	AA67-00204A	MIRROR-FRONT;42W5,FSM,870*633*446	1		
36	BP61-00008A	BRACKET-MIRROR,ASSY;42W5,SECC,T1.0,01123	2	T0068	S.N.A
37	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	4	T0081	S.N.A
38	AA64-02728A	CABINET-BACK,TOP;42W5,HIPS,HB,G4309	1	T0112	
39	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	7	T0081	S.N.A
40	AA64-02729B	CABINET-BACK,BOT;42W5,HIPS,V0,G4309	1	T0112	
41	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	3	HC+CW	S.N.A
42	BP96-00038H	ASSY COVER P-TERMINAL,ANT;WIDE PJT,HIPS	1	T0092	
43	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	4	T0081	S.N.A
44	BP94-00498A	ASSY PCB MAIN;HCN4727WX/XAA,P55A	1	T0073	

6-2 ST54T8PCS/XAX

You can search for the updated part code through ITSELF web site.
URL : http://itself.sec.samsung.co.kr

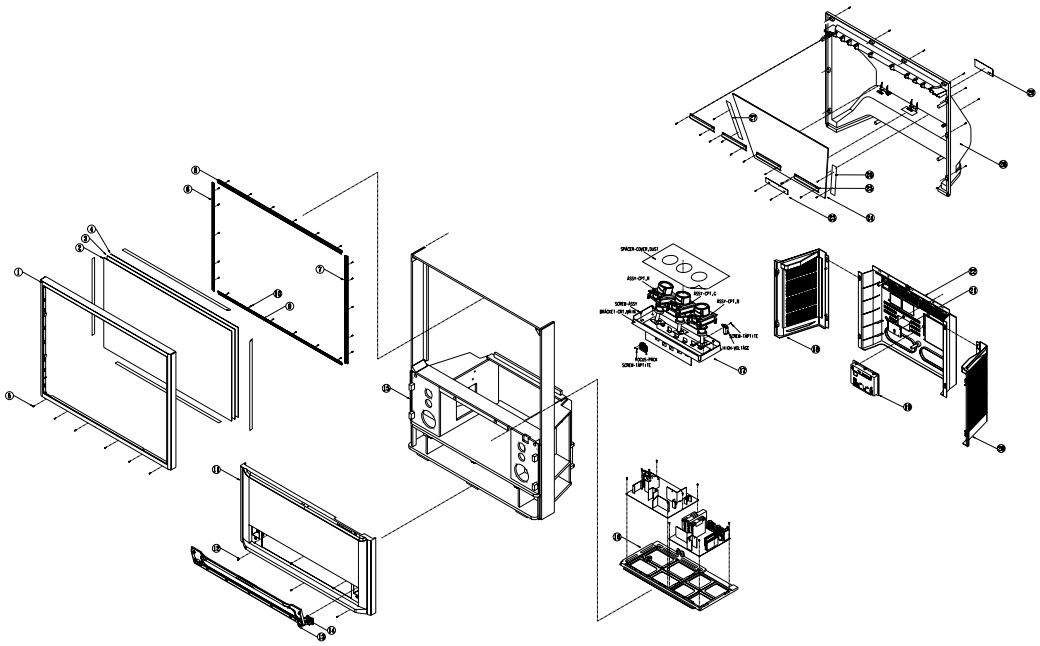

No	Code No	Description;Specification	Q'ty	Remark	S.N.A
1	BP96-00338B	ASSY COVER P-FRONT MASK;DP,BP64-00164E,5	1		S.N.A
2	AA67-00130A	SUN SCREEN-AG;54J8,1125*853*,T=82%,G=110	1		
3	AA67-00199A	SCREEN-TINT;54,1123*852,P=0.5,DNP	1		
4	AA67-00116B	SCREEN FRESNEL;53,1125*854,T2	1		
5	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	6		S.N.A
6	BP96-00342A	ASSY MISC P-BRKT SCREEN RL;DP,BP61-00190	2		S.N.A
7	BP96-00342A	ASSY MISC P-BRKT SCREEN RL;DP,BP61-00190	2		S.N.A
8	BP96-00341A	ASSY MISC P-BRKT SCREEN TB;DP,BP61-00189	2		S.N.A
9	BP96-00341A	ASSY MISC P-BRKT SCREEN TB;DP,BP61-00189	2		S.N.A
10	6009-001296	SCREW-SPECIAL;BH,+,-,M4,L12(11),ZPC(BLK)	22		
11	BP96-00339B	ASSY COVER P-FRONT BOT;DP,BP64-00151D,54	1		S.N.A
12	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	6		S.N.A
13	BP96-00340A	ASSY COVER P-DOOR RACK;DP,BP64-00154A,54	1		S.N.A
14	6002-000522	SCREW-TAPPING;TH,+,2,M4,L15,ZPC(BLK),SWR	3		
15	BP98-00192A	ASSY K/D-WOOD;54T8,WOOD	1		S.N.A
16	BP94-00519A	ASSY PCB MAIN;ST54T8PCS/XAX,P55A,MEXICO	1		
17	BP98-00181A	ASSY K/D-CPT R;ST54T8PCS/XAX,P55A	1		
18	BP64-00153A	CABINET-BACK,SIDE R;54T8,HIPS,HB,BLK	1		
19	AA65-00023A	TERMINAL-BOARD,ANT;,HIPS V0,BLK	1		S.N.A
20	BP64-00153B	CABINET-BACK SIDE L;54T8,HIPS,,,,HB,BLK,	1		
21	BP61-00180C	HOLDER-POWER;HIPS,T8,Q7,V0,BLK	1		S.N.A
22	BP64-00152A	CABINET-BACK,BOT;54T8,HIPS,HB,BLK	1		
23	AA61-01134A	HOLDER-MIRROR,BOT;43,54T6,HIPS HB,BLK	1		S.N.A
24	AA67-00080A	MIRROR-BACK;54J8,GLASS,940.5*684.5*674.5	1		
25	AA91-00489B	ASSY-BRKT,MIRROR;-,-,SECC-1 T1.0,54J8	1		
26	AA91-00887A	ASSY-HOLDER,MIRROR(R);,HIPS HB BLK,INLAY	1		S.N.A
27	AA91-00887B	ASSY-HOLDER,MIRROR(L);,HIPS HB BLK,INLAY	1		S.N.A
28	AA64-01379B	CABINET-BACK,TOP;54J8,HIPS,-,-,-,HB,BLK,	1		
29	AA64-60449B	INLAY-COVER;SP-434JMF,PS,T0.5,149.3X69.5	1		S.N.A

6-3 HCN4727W5S/XAA

You can search for the updated part code through ITSELF web site.
URL : http://itself.sec.samsung.co.kr

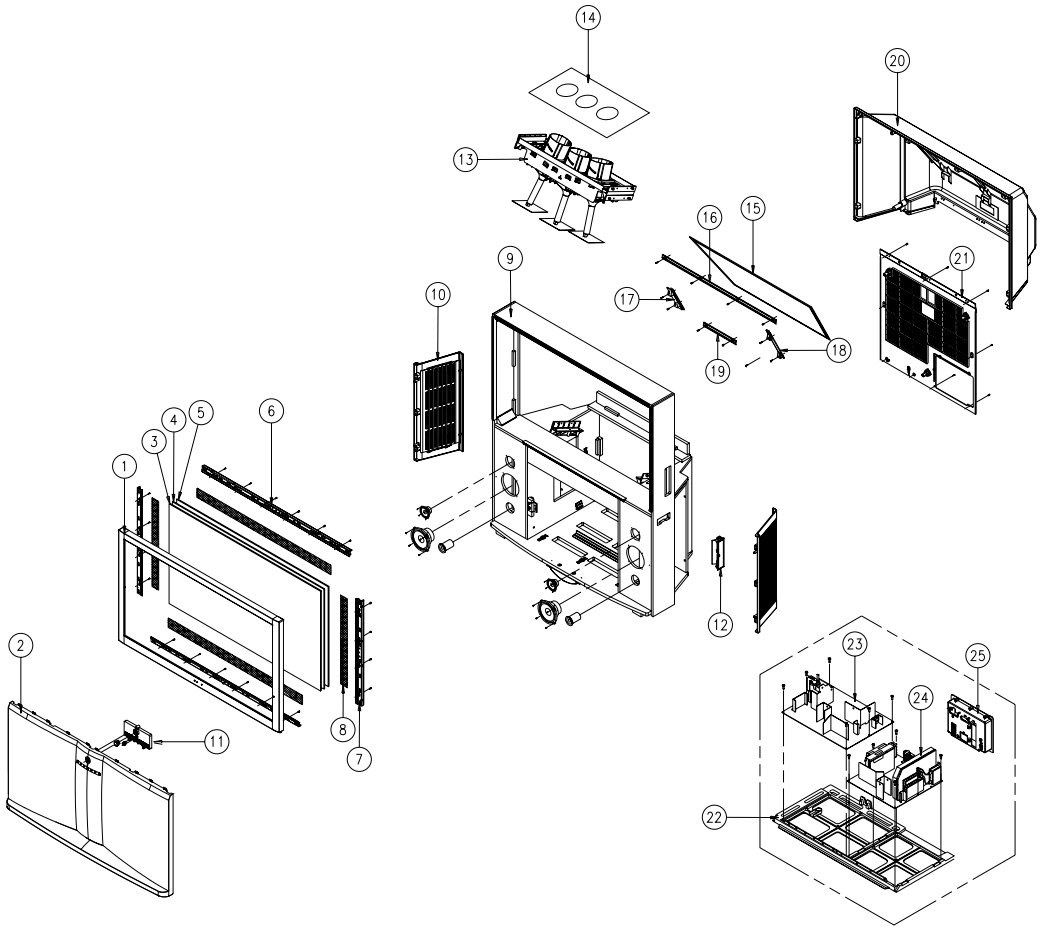

No	Code No	Description;Specification	Q'ty	Remark	S.N.A
1	BP64-00201A	CABINET FRONT-MASK;47W7,HIPS HB,GRY,DGM1	1	T0017	S.N.A
2	BP64-00202A	CABINET FRONT-BOT;47W7,HIPS V0,G4309,SV0	1		S.N.A
3	AA67-00136A	SUN SCREEN-AG;47W,1072*614*,T=82%,G=110	1	T0110	
4	AA67-00119B	SCREEN FRESNEL;47W,1072*614,T2	1	T0053	
5	AA67-00196A	SCREEN-TINT;47W,1070*612,T=0.7,P	1	T0056	
6	BP61-00350A	HOLDER-SCREEN TOP ASSY;HIPS,47W7,HB,BLK,	1		S.N.A
7	BP61-00352A	HOLDER-SCREEN SIDE ASSY;HIPS,47/55W7,HB,	2		S.N.A
8	AA60-00091T	SPACER-FELT;W7,L635,BLK,T0.35,W10	1	T0069	S.N.A
9	BP98-00184A	ASSY K/D-WOOD;47W7,XAA	1		S.N.A
10	AA64-02065C	CABINET-BACK,SIDE;47.55W3,HIPS V0,BLK	2	T0111	
11	BP64-00205A	KNOB CONTROL;47W7,ABS HB,G3676,SVM3132	1	T0022	S.N.A
12	AA91-00762D	ASSY-JACK,SIDE;,P54A PAL XAA,W3	1	T0014	
13	BP98-00174A	ASSY K/D-CRT R;HCN4727WSC/XAA,P55A	1	T0026	
14	AA60-00072B	SPACER-COVER,DUST;43,54,62J9,SPONGE 94HF	1		S.N.A
15		MIRROR-FRONT	1		
16	AA61-00783B	BRACKET-MIRROR;47W3,SECC,T1.0	1		S.N.A
17	AA61-00879A	HOLDER-MIRROR,SIDE(R);47W3,HIPS HB,BLK	1		S.N.A
18	AA61-00879B	HOLDER-MIRROR,SIDE(L);47W3,HIPS HB,BLK	1		S.N.A
19	AA61-01134A	HOLDER-MIRROR,BOT;43,54T6,HIPS HB,BLK	1		S.N.A
20	AA64-02061B	CABINET-BACK,TOP;47W3,HIPS HB,BLK,DO	1	T0112	
21	BP64-00203A	CABINET BACK-BOT;47W7,HIPS V0,BLK	1	T0015	S.N.A
22	AA61-01127A	HOLDER-CHASSIS;COMMANDO,HIPS V0,G4309	1	T0070	S.N.A
23	BP94-00505N	ASSY PCB MISC-PWR-DEF;HCN4727WX/XAA,P55A	1	T0097	
24	BP94-00500C	ASSY PCB MAIN;HCN4727WSC/XAA,P55A	1	T0073	
25	BP96-00077L	ASSY COVER P-TERMINAL,ANT;DP WIDE PJT,HI	1	T0092	

You can search for the updated part code through ITSELF web site.
URL : http://itself.sec.samsung.co.kr

7. Electrical Parts List

7-1 HCN4226WX/XAA

Loc. No.	Code No.	Description ; Specification	Remark

ASSY COVER FRONT

1	M0001	BP90-00152A	ASSY COVER FRONT;,P55A	S.N.A
..2	T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
..2	T0081	6003-001339	SCREW-TAPTITE;HH,+,B,M4,L15,ZPC(BLK),SWR	S.N.A
..2	HC+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	S.N.A
..2	HC+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	S.N.A
..2	HC+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	S.N.A
..2	BCM+WO	6006-001094	SCREW-ASS'Y WOOD;WW,HH,+,M7,L32,ZPC(YEL)	S.N.A
..2	T0118	AA26-00101A	TRANS FBT-H/V DISTRIBUTOR;FWZ50A001E/FFA	
..2		AA60-00072B	SPACER-COVER,DUST;43,54,62J9,SPONGE 94HF	S.N.A
..2	T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
..2	T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
..2	T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
..2	T0115	AA61-00475B	BRACKET-CRT,MAIN;54,SECC,T1.6,-,-,-,-	
..2		AA61-00618C	GUIDE-FLOW;54J8,J7,ABS,IVORY,V0	S.N.A
..2		AA63-10002A	BAND-TIE;NYLON66 V2,L100,NTR	S.N.A
..2	T0056	AA67-00193A	SCREEN-TINT;42W,958*550,T=0.7,P	
..2	T0053	AA67-00193B	SCREEN FRESNEL;42W,960*552,T=2.0	
..2	T0052	AA67-00207A	SCREEN-FILTER;,T=82%,9,G=110,AG	
..2	T0076	BP39-00009A	LEAD CONNECTOR-ASSY;P54A/SVP-42W5,UL2547	
..2		BP61-00023E	BRACKET-SCREEN,ASSY(TOP);42W5,SECC,T1.0	S.N.A
...3	T0069	AA60-00091J	SPACER-FELT;-,FELT,330X10,-,-,BLK,T0.5,-	S.N.A
...3	T0254	AA61-01121A	BRACKET-SCREEN,TB;42W5,SECC,T1.0	S.N.A
...3		BP61-00043B	HOLDER-SENSOR;W9,PC HB,VIOLET	S.N.A
...3		BP61-00052A	HOLDER-WIRE;PJTV,NYLON,66,NATURAL	S.N.A
..2		BP61-00024E	BRACKET-SCREEN,ASSY(BOT);42W5,SECC,T1.0,	S.N.A
...3	T0069	AA60-00091J	SPACER-FELT;-,FELT,330X10,-,-,BLK,T0.5,-	S.N.A
...3		AA65-00020A	CLAMPER CORE-WIRE;55W9,NYLON 66	S.N.A
...3		BP61-00043B	HOLDER-SENSOR;W9,PC HB,VIOLET	S.N.A
...3		BP61-00052A	HOLDER-WIRE;PJTV,NYLON,66,NATURAL	S.N.A
...3	T0254	AA61-01121A	BRACKET-SCREEN,TB;42W5,SECC,T1.0	S.N.A
..2		BP61-00025D	BRACKET-SCREEN,ASSY(R);42W5,SECC,T1.0,NE	S.N.A
...3	T0056	AA61-01122A	BRACKET-SCREEN,RL;42W5,SECC,T1.0	
...3		BP61-00043B	HOLDER-SENSOR;W9,PC HB,VIOLET	S.N.A
...3		BP61-00052A	HOLDER-WIRE;PJTV,NYLON,66,NATURAL	S.N.A
..2		BP61-00026D	BRACKET-SCREEN,ASSY(L);42W5,SECC,T1.0,NE	S.N.A
...3	T0056	AA61-01122A	BRACKET-SCREEN,RL;42W5,SECC,T1.0	
...3		BP61-00043B	HOLDER-SENSOR;W9,PC HB,VIOLET	S.N.A
...3		AA65-00020A	CLAMPER CORE-WIRE;55W9,NYLON 66	S.N.A
...3		BP61-00052A	HOLDER-WIRE;PJTV,NYLON,66,NATURAL	S.N.A
..2		BP64-00029A	INLAY-SUPPORT;42W5,PS SHEET,T0.5,94V0	S.N.A
..2	T0102	BP73-00004A	RUBBER-CAP;42W5,SILICONE,WHT,RUBBER	
..2	T0257	BP91-00005D	ASSY-CABINET,WOOD;,WOOD,MIJU,42W5	S.N.A
...3	T0082	3001-001107	SPEAKER;20W,8OHM,95DB,1300HZ	
...3	T0076	AA39-00086A	LEAD CONNECTOR-ASSY;,2.2UF,200MM,REC,REC	
...3	HC+CW	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,-,-,ZP	S.N.A
...3		AA61-00097A	HOLDER-WIRE;-,NYLON 6/6,-,-,-,NTR,-	S.N.A
...3		AA61-00506B	HOLDER-CRT,MAIN;43,54,62J8,HIPS,-,-,-,BL	S.N.A
...3		AA61-00508D	HOLDER-JERSEY;W3,ABS V0,GRAY,G4309	S.N.A
...3		AA61-00533B	BRACKET-GRILLE;43,54,62J8,SECC-1 ,T0.5,-	S.N.A
...3		AA64-02724A	CABINET-WOOD;42W5,WOOD,SDE8336R	S.N.A
...3		AA98-00049A	ASSY-LEAD,CON;-,LEAD-CON,CORE,AA39-20505	S.N.A
....4	T0121	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
...3		BP61-00019A	HOLDER-PALLET;42W5,HIPS HB,BLK	S.N.A
...3		BP61-00035A	BRACKET-GRILLE;42W5,SECC-1,T1.0	S.N.A
...3		AA61-00094C	HOLDER-RAIL;PCJ533R,ABS,-,-,-,BLK,HB,480	S.N.A
...3	T0082	3001-001353	SPEAKER;25W,8OHM,90DB+/-3DB,60HZ+/-12HZ	
..2	T0004	BP91-00006Q	ASSY-FRONT MASK;42W8,SV012P,HIPS,HB,GRY,	S.N.A
...3	T0081	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
...3		AA61-01133A	VELCRO-B;COMMANDO,BST1 1/4H	S.N.A
...3	T0017	AA64-02727R	CABINET-FRONT MASK;42W8,HIPS,HB,GRY,SV01	
...3	T0057	BP64-00199A	BADGE-BRAND;PJLCD,AL,T1.5,72,12.5,,DGN-S	S.N.A
...3	T0102	BP73-00004A	RUBBER-CAP;42W5,SILICONE,WHT,RUBBER	
..2	T0071	BP96-00285A	ASSY COVER P-FRONT BOT;42W8,HIPS,V0,G430	S.N.A
...3	T0081	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
...3	T0081	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
...3	T0081	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
...3		AA61-01132A	VELCRO-A;COMMANDO,BST1 1/4H	S.N.A
...3	CIS7	AA61-60003A	SPRING ETC-CS;-,SUS304,-,-,OD7,N7,OD7,-,	S.N.A
...3		BP61-00272A	HOLDER-PCB POWER;42W8,ABS,SMOG,6G	S.N.A
...3		BP61-00273A	HOLDER-RING;42W8,ABS,GRAY,AL	S.N.A
...3		BP64-00230A	CABINET FRONT-BOT;42W8,HIPS V0,GRAY,SV70	S.N.A
...3	T0023	BP64-00231A	KNOB POWER;42W8,ABS,HB,GRAY,AL	S.N.A
...3		BP64-00232A	WINDOW-RMC;42W8,ABS,HB,CLEAR	S.N.A
...3	T0022	BP64-00233A	KNOB CONTROL;42W8,ABS,HB,GRAY,SVM1132	S.N.A
...3		AA61-20129A	HOLDER-WIRE;-,NYLON-66,-,-,-,NTR,DAFC-25	S.N.A
..2		BH73-60304C	RUBBER-SUPPORT;DP15LT,CR V0,GRAY,-,14*7*	S.N.A

ASSY COVER REAR

1	M0002	BP90-00155A	ASSY COVER REAR;,P55A	S.N.A
..2	T0081	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	S.N.A
..2	T0081	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	S.N.A
..2	T0081	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	S.N.A
..2	T0081	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	S.N.A
..2	T0081	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	S.N.A
..2	HC+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	S.N.A
..2	HC+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	S.N.A
..2	T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
..2	T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
..2	T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
..2	T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
..2	T0112	AA64-02728A	CABINET-BACK,TOP;42W5,HIPS,HB,G4309	
..2	T0112	AA64-02729B	CABINET-BACK,BOT;42W5,HIPS,V0,G4309	
..2		AA64-60449B	INLAY-COVER;SP-434JMF,PS,T0.5,149.3X69.5	S.N.A
..2		AA65-30008A	CLAMPER CORE-CORD;-,PE,HB,-,BLK,-	S.N.A
..2		AA67-00204A	MIRROR-FRONT;42W5,FSM,870*633*446	
..2	T0068	BP61-00008A	BRACKET-MIRROR,ASSY;42W5,SECC,T1.0,01123	S.N.A
...3		AA61-01123A	BRACKET-MIRROR;42W5,SECC,T1.0	S.N.A
...3		BP60-00005A	SPACER-SPONGE;42W5,RUBBER-SPONGE,T3	S.N.A
..2	T0092	BP96-00038H	ASSY COVER P-TERMINAL,ANT;WIDE PJT,HIPS	
...3		AA64-02836J	INLAY-TERMINAL,NT;WIDE PJT,PS SHEET,T0.5	S.N.A
...3		AA65-00023A	TERMINAL-BOARD,ANT;,HIPS V0,BLK	S.N.A
..2		AA64-60421C	INLAY-COVER;-,PS,T0.3,-,-,BLK,SEA	S.N.A

ASSY PRT

1		BP91-00423A	ASSY PRT;HCM4215WX/XAA,P55A,ASSY-PRT	S.N.A
..2	T0026	BP91-00420A	ASSY CPT-R;0	
...3		AA03-00200A	CRT MONO;P16LSG03RJA,FREE,3.30mH,2.20mH,	S.N.A
...3	T0117	AA26-30006F	TRANS FBT-ANODE CAP ASS'Y;-,FWZ-50A001C,	
...3	T0078	AA27-00249A	DEFLECTION YOKE;-,DPD-5292AA,S/S,7,29.1	
...3	T0079	AA33-00016A	MAGNET CONVERGENCE;JH 92LT - 29F,-,29.1M	
...3	T0076	AA39-00018A	LEAD CONNECTOR-ASSY;,UL1015#22,UL/CSA,1P	
...3		AA60-00126B	SPACER-CAP;PROJ,EPDM,BLK	S.N.A
...3		AA60-00127B	SPACER-LENS;PROJ,SILICONE,D/GRAY	S.N.A
...3		AA60-00128B	SPACER-CRT;PROJ(65),SILICONE,D/GRAY	S.N.A
...3	T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
...3		AA61-00056B	BRACKET-LENS;PROJECTION,SECC,T1.6,-,-,-,	S.N.A
...3		AA61-00806B	CASE-COUPLER,R;PROJ,ALDC,T8,BLK	S.N.A
...3	T0114	AA61-00810B	HOLDER-CAP;PROJ,PC,CLR	
...3	T0109	AA67-00187A	LENS-ASSY;DELTA71,CLEAR A/B	
...3	T0051	AA67-00188A	LENS;DELTA71,RED C ELEMENT	
...3	T0107	AA91-00722A	ASSY-BRKT,CRT;,SECC T1.6,PROJ	
....4	T0072	AA61-00473B	BRACKET-CRT;53,SECC,T1.6,-,-,-,-	S.N.A

Loc. No.		Code No.	Description ; Specification	Remark
....4		AA61-00615B	BRACKET-EARTH;54J8,PBS,T0.5,-,-,-,-	S.N.A
....4		AA61-00812A	SPRING ETC-WIRE;PROJ,STS,3.6	S.N.A
...3		BP61-00091A	HOLDER-CRT;PJTV,PCABS GF20%,BLUE	S.N.A
...3		BP61-00079A	HOLDER-DY;,PJTV,T0.5,NYLON66 V2	S.N.A
...3		AA63-00076B	SPACER-LENS;FELT,W7,BLK,T0.8	S.N.A
..2	T0027	BP91-00421A	ASSY CPT-G;0	
...3		AA03-00201A	CRT MONO;P16LSG03HKA,FREE,3.30mH,2.20mH,	S.N.A
...3	T0117	AA26-30006F	TRANS FBT-ANODE CAP ASS'Y;-,FWZ-50A001C,	
...3	T0078	AA27-00249A	DEFLECTION YOKE;-,DPD-5292AA,S/S,7,29.1	
...3	T0076	AA39-00018A	LEAD CONNECTOR-ASSY;,UL1015#22,UL/CSA,1P	
...3		AA60-00125B	SPACER-CRT;PROJ,SILICONE,D/GRAY	S.N.A
...3		AA60-00126B	SPACER-CAP;PROJ,EPDM,BLK	S.N.A
...3		AA60-00127B	SPACER-LENS;PROJ,SILICONE,D/GRAY	S.N.A
...3	T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
...3		AA61-00056B	BRACKET-LENS;PROJECTION,SECC,T1.6,-,-,-,	S.N.A
...3		AA61-00807B	CASE-COUPLER,G;PROJ,ALDC,T8,BLK	S.N.A
...3		AA61-00809B	HOLDER-CRT;PROJ,PC/ABS GF 20%,BLK	S.N.A
...3	T0114	AA61-00810B	HOLDER-CAP;PROJ,PC,CLR	
...3	T0109	AA67-00187A	LENS-ASSY;DELTA71,CLEAR A/B	
...3	T0051	AA67-00189A	LENS;DELTA71,GREEN C ELEMENT	
...3	T0107	AA91-00722A	ASSY-BRKT,CRT;,SECC T1.6,PROJ	
....4	T0072	AA61-00473B	BRACKET-CRT;53,SECC,T1.6,-,-,-,-	S.N.A
....4		AA61-00615B	BRACKET-EARTH;54J8,PBS,T0.5,-,-,-,-	S.N.A
....4		AA61-00812A	SPRING ETC-WIRE;PROJ,STS,3.6	S.N.A
...3		BP61-00079A	HOLDER-DY;,PJTV,T0.5,NYLON66 V2	S.N.A
...3		AA63-00076B	SPACER-LENS;FELT,W7,BLK,T0.8	S.N.A
..2	T0028	BP91-00422A	ASSY CPT-B;0	
...3		AA03-00202A	CRT MONO;P16LSG03BMB,FREE,3.30mH,2.20mH,	S.N.A
...3	T0117	AA26-30006F	TRANS FBT-ANODE CAP ASS'Y;-,FWZ-50A001C,	
...3	T0078	AA27-00249A	DEFLECTION YOKE;-,DPD-5292AA,S/S,7,29.1	
...3	T0079	AA33-00018A	MAGNET CONVERGENCE;JH 92LT - 36F,-,29.1M	
...3	T0076	AA39-00018A	LEAD CONNECTOR-ASSY;,UL1015#22,UL/CSA,1P	
...3		AA60-00126B	SPACER-CAP;PROJ,EPDM,BLK	S.N.A
...3		AA60-00127B	SPACER-LENS;PROJ,SILICONE,D/GRAY	S.N.A
...3		AA60-00128B	SPACER-CRT;PROJ(65),SILICONE,D/GRAY	S.N.A
...3	T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
...3		AA61-00056B	BRACKET-LENS;PROJECTION,SECC,T1.6,-,-,-,	S.N.A
...3		AA61-00808B	CASE-COUPLER,B;PROJ,ALDC,T8,BLK	S.N.A
...3	T0114	AA61-00810B	HOLDER-CAP;PROJ,PC,CLR	
...3	T0109	AA67-00187A	LENS-ASSY;DELTA71,CLEAR A/B	
...3	T0051	AA67-00190A	LENS;DELTA71,CLEAR C ELEMENT	
...3	T0107	AA91-00722A	ASSY-BRKT,CRT;,SECC T1.6,PROJ	
....4	T0072	AA61-00473B	BRACKET-CRT;53,SECC,T1.6,-,-,-,-	S.N.A
....4		AA61-00615B	BRACKET-EARTH;54J8,PBS,T0.5,-,-,-,-	S.N.A
....4		AA61-00812A	SPRING ETC-WIRE;PROJ,STS,3.6	S.N.A
...3		BP61-00091A	HOLDER-CRT;PJTV,PCABS GF20%,BLUE	S.N.A
...3		BP61-00079A	HOLDER-DY;,PJTV,T0.5,NYLON66 V2	S.N.A
...3		AA63-00076B	SPACER-LENS;FELT,W7,BLK,T0.8	S.N.A

ASSY CHASSIS

1	M0017	BP91-00771L	ASSY CHASSIS;HCN4226WX/XAA,P55A	S.N.A
..2	T0098	AA94-08268A	ASSY PCB MISC-VM;COMMANDO	
...3	RZ120	2008-001097	R-FUSIBLE(S);33OHM,5%,1/2W,AC,BK,2.5X6.5	
...3		AA97-07230M	ASSY AUTO-VM;COMMANDO	S.N.A
....4	DZ106	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4	DZ105	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4	DZ102	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4	T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4	T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4	T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4	QZ103	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4	QZ106	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4	QZ105	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4	QZ104	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4	RZ122	2001-000019	R-CARBON(S);10OHM,5%,1/2W,AA,TP,2.4X6.4M	
....4	R125	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000554	R-CARBON;270OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000666	R-CARBON;33OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000832	R-CARBON;510OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	RZ110	2001-001100	R-CARBON(S);2.7OHM,5%,1/2W,AA,TP,2.4X6.4	
....4	RZ104	2001-001100	R-CARBON(S);2.7OHM,5%,1/2W,AA,TP,2.4X6.4	
....4	RZ105	2001-001139	R-CARBON(S);39KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4	RZ106	2001-001139	R-CARBON(S);39KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4	RZ114	2003-000532	R-METAL OXIDE(S);18ohm,5%,2W,AF,TP,4x12m	
....4	RZ103	2003-000713	R-METAL OXIDE(S);47ohm,5%,2W,AF,TP,4x12m	
....4	RZ111	2003-000713	R-METAL OXIDE(S);47ohm,5%,2W,AF,TP,4x12m	
....4	RZ123	2003-002157	R-METAL OXIDE;220OHM,5%,2W,AG,TP,6X16MM	
....4	RZ113	2003-002157	R-METAL OXIDE;220OHM,5%,2W,AG,TP,6X16MM	
....4	RZ112	2003-002157	R-METAL OXIDE;220OHM,5%,2W,AG,TP,6X16MM	
....4	RFZ101	2008-001086	R-FUSIBLE(S);3.3ohm,5%,2W,AG,TP,3.9x12mm	
....4	C598	2201-000193	C-CERAMIC,DISC;0.01NF,0.25PF,50V,C0G,TP,	
....4	C598	2201-000193	C-CERAMIC,DISC;0.01NF,0.25PF,50V,C0G,TP,	
....4	C598	2201-000516	C-CERAMIC,DISC;4.7NF,+100-0%,500V,Y5U,TP	
....4	C598	2201-000516	C-CERAMIC,DISC;4.7NF,+100-0%,500V,Y5U,TP	
....4	C598	2201-000604	C-CERAMIC,DISC;0.056NF,+100-0%,500V,SL,T	
....4	C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4	C701	2401-000832	C-AL;220uF,20%,25V,GP,TP,8x11.5,5	
....4	C701	2401-001157	C-AL;33uF,20%,160V,GP,TP,12.5x20,5	
....4	C701	2401-001220	C-AL;4.7uF,20%,160V,GP,TP,8x11.5,5	
....4	C701	2401-001220	C-AL;4.7uF,20%,160V,GP,TP,8x11.5,5	
....4	C701	2401-001513	C-AL;47uF,20%,16V,WT,TP,5x11,5	
....4	C701	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
....4	LZ101	2701-000002	INDUCTOR-AXIAL;100uH,10%,4.2x9.8mm	
....4	CN906	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
....4	CN906	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
....4	CN906	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
....4	PCB	AA41-00611A	PCB-VM;HCM4215W,FR-1,1L,A,1.6T,245X245,P	S.N.A
...3	QZ101	AA96-00243M	ASSY H/S;-,AMP,AA62-000450A,2SA1011,HERC	S.N.A
....4		0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4	T0090	0502-000131	TR-POWER;2SA1011-D,PNP,1.2W,TO-220,-,60	
....4	T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
....4		AA62-00045A	HEAT SINK-PS;-,-,T1.0,-,-,DREAM,-,-,-,-,	S.N.A
...3	QZ102	AA96-00243L	ASSY H/S;-,CRT,AA62-000450A,2SC2344,HERC	S.N.A
....4		0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4	T0090	0502-000153	TR-POWER;2SC2344-D,NPN,1.2W,TO-220,-,60	
....4	T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
....4		AA62-00045A	HEAT SINK-PS;-,-,T1.0,-,-,DREAM,-,-,-,-,	S.N.A
...3		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3	T0121	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
...3	T0079	AA33-00017A	MAGNET CONVERGENCE;JH 92LT - 29G,-,29.1M	
...3	T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
...3	T0076	AA39-20055C	LEAD CONNECTOR-ASSY;,6P,500,YBNH025-06,6	
..2	T0105	AA94-08270A	ASSY PCB MISC-DY JACK;COMMANDO	
...3		AA97-07230N	ASSY AUTO;COMMANDO	S.N.A
....4	R301	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4	
....4	R302	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4	
....4	R303	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4	
....4	PCB	AA41-00632A	PCB-DY CONNECTION;HCM4215W,FR-1,1L,A,1.6	S.N.A
...3		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3	GT01	AA60-40012D	PIN-GT,ASSY;T1.6,6-12.5-,NYLON66	S.N.A
...3	GT05	AA60-40012D	PIN-GT,ASSY;T1.6,6-12.5-,NYLON66	S.N.A
...3	GT09	AA60-40012D	PIN-GT,ASSY;T1.6,6-12.5-,NYLON66	S.N.A
...3	GT13	AA60-40012D	PIN-GT,ASSY;T1.6,6-12.5-,NYLON66	S.N.A
...3		AA61-01197A	HOLDER-PCB,DY;COMANDO,ABS V0,BLK	S.N.A
..2	T0097	AA94-08574A	ASSY PCB MISC-PWR-DEF; ,HCM4215W,P55A	
...3		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3	T0083	0402-000236	DIODE-RECTIFIER;GI824,400V,5A,-,TP	
...3	T0083	0402-000250	DIODE-RECTIFIER;RG4C,1000V,1A,-	
⚠ ...3		NT801S 1404-001195	THERMISTOR-NTC;5.1ohm,15%,2900,27mW/C,BK	
⚠ ...3		CX802S 2306-000112	C-FILM,MPPF;100nF,20%,250V,BK,-,15mm	
⚠ ...3		CX801S 2306-000112	C-FILM,MPPF;100nF,20%,250V,BK,-,15mm	
...3	C701	2401-000701	C-AL;2200uF,20%,250V,GP,-,35x70mm,1	
...3	C701	2401-000701	C-AL;2200uF,20%,250V,GP,-,35x70mm,1	
...3	C701	2401-002251	C-AL;470uF,20%,200V,GP,BK,25x40mm,1	
...3	C701	2401-003076	C-AL;3300UF,20%,50V,WT,BK,18X35.5MM,7.5	
...3	C701	2401-003076	C-AL;3300UF,20%,50V,WT,BK,18X35.5MM,7.5	
...3	C701	2401-003076	C-AL;3300UF,20%,50V,WT,BK,18X35.5MM,7.5	
⚠ ...3		FP801S 3601-000300	FUSE-CARTRIDGE;250V,6.3A,SLOW-BLOW,GLASS	
⚠ ...3		T481 AA26-00091A	TRANS-HV-STORAGE;4mH,-,14P,830uH,180V,10	
⚠ ...3		T444S AA26-00100A	TRANS FBT;FFA97513L,CT29A7DR,0.3mH,-,-,-	
⚠ ...3		T431 AA26-50001U	TRANS-HORIZ.DRIVE;-,-,-,28mH,-,-,105uH,-	
⚠ ...3		T461 AA26-50001V	TRANS-HORIZ.DRIVE;-,-,-,6.0mH,-,-,113uH,	
⚠ ...3		LR401S AA27-30003M	COIL LINEARITY;-,5uH,OWA14x15,USRC0.1x60	

Loc. No.	Code No.	Description ; Specification	Remark
...3	T0076	AA39-00180A LEAD CONNECTOR-ASSY;,14P,100MM,YBNH250-1	
⚠ ...3	D856	AA96-00243E ASSY H/S;-,SOUND,AA62-00045A,FMG-G26S	S.N.A
⚠ ...3	D855	AA96-00243E ASSY H/S;-,SOUND,AA62-00045A,FMG-G26S	S.N.A
....4		0205-000129 GREASE-SILICON;SC102,JAPAN	S.N.A
....4	T0083	0402-000231 DIODE-RECTIFIER;FMG-G26S,600V,4A,TO-220F	
....4	T0081	6003-000335 SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
....4		AA62-00045A HEAT SINK-PS;-,-,T1.0,-,-,DREAM,-,-,-,-	S.N.A
...3	Q433	AA96-00243H ASSY H/S;-,POWER,AA62-00045A,KSD73Y,C17A	S.N.A
....4		0205-000129 GREASE-SILICON;SC102,JAPAN	S.N.A
....4	T0090	0502-000298 TR-POWER;KSD73,NPN,30000mW,TO-220,TP,120	
....4	T0081	6003-000335 SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
....4		AA62-00045A HEAT SINK-PS;-,-,T1.0,-,-,DREAM,-,-,-,-	S.N.A
⚠ ...3	IC831S	AA96-00275J ASSY H/S;SCREW,SILICON-OIL,AA62-00051A,S	S.N.A
....4	CIS	0205-000129 GREASE-SILICON;SC102,JAPAN	S.N.A
....4	T0081	6003-000333 SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
....4	IC063	AA13-00105A IC HYBRID;STR-X6456,7,-20TO+125,DIP,21A,	
....4	CIS	AA62-00051A HEAT SINK-PS;-,-,-,SILVER,HOLE 31mm,ALL,	S.N.A
⚠ ...3	D811S	AA96-00276A ASSY H/S;-,BRIDGE,AA62-00052A,RBV606,WAS	S.N.A
....4		0205-000129 GREASE-SILICON;SC102,JAPAN	S.N.A
....4	T0083	0402-000549 DIODE-BRIDGE;RBV606,600V,6A,-,BK	
....4	T0081	6003-000335 SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
....4		AA60-30003A WASHER;T1.5,SBHG-1	S.N.A
....4		AA62-00052A HEAT SINK-PS;-,-,-,SILVER,HOLE 18.5mm, 2	S.N.A
...3	IC301	AA96-00623A ASSY H/S;-,POWER,AA62-00056A,LA7845	S.N.A
....4		0205-000129 GREASE-SILICON;SC102,JAPAN	S.N.A
....4	T0088	1204-000517 IC-VERTICAL DEF.;LA7845,SIP,7P,-,PLASTIC	
....4	T0081	6003-000334 SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
....4		AA62-00056A HEAT SINK-PS;-,-,T1.0,-,41*35*70,D2,-,-	S.N.A
...3		AA97-07506Z ASSY AUTO-PWR DEF;HCM4215W	S.N.A
....4	D478	0401-000005 DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4	D479	0401-000005 DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
⚠ 4	DR401S	0401-000005 DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
⚠ 4	DR402S	0401-000005 DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4	D385	0401-000005 DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4	D436	0401-000005 DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4	D442	0401-000005 DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4	D443	0401-000005 DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4	D477	0401-000005 DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4	D301	0401-000005 DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4	DS802	0401-000006 DIODE-SWITCHING;BAV21,250V,250mA,DO-35,T	
....4	DS804	0401-000006 DIODE-SWITCHING;BAV21,250V,250mA,DO-35,T	
....4	T0083	0402-000132 DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
....4	T0083	0402-000132 DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
....4	T0083	0402-000132 DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
....4	T0083	0402-000132 DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
....4	T0083	0402-000132 DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
....4	T0083	0402-000132 DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
....4	T0083	0402-000254 DIODE-RECTIFIER;RGP10J,600V,1A,DO-41,TP	
....4	T0083	0402-000534 DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
....4	T0083	0402-000534 DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
....4	T0083	0402-000534 DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
....4	T0083	0402-000534 DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
....4	T0083	0402-000537 DIODE-RECTIFIER;RH1A,600V,0.6A,DO-204AC	
....4	T0083	0402-000546 DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4	T0083	0402-000546 DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4	T0083	0402-000546 DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4	T0083	0402-000546 DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4	T0083	0402-000546 DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4	DZ016	0403-000704 DIODE-ZENER;TZP7.5B,7.5V,7.5-8.4V,1W,DO-	
....4	DZ016	0403-000716 DIODE-ZENER;MTZJ4.7B,4.7V,4.55-4.8V,500m	
....4	DZ016	0403-000720 DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
....4	DZ016	0403-000720 DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
....4	DZ016	0403-000720 DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
....4	DZ016	0403-000734 DIODE-ZENER;TZP15B,15V,14.7-16.5V,1W,DO-	
....4	DZ016	0403-001167 DIODE-ZENER;MTZJ30D,30V,29.02-30.51V,500	
....4	DZ016	0403-001316 DIODE-ZENER;MTZJ3.0A,2.85-3.07V,500mW,DO	
....4	DZ016	0403-001319 DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	
....4	DZ016	0403-001319 DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	
....4	DZ016	0403-001325 DIODE-ZENER;MTZJ15C,14.35-15.09V,500mW,D	
....4	DZ016	0403-001325 DIODE-ZENER;MTZJ15C,14.35-15.09V,500mW,D	
....4	DZ016	0403-001325 DIODE-ZENER;MTZJ15C,14.35-15.09V,500mW,D	
....4	DZ016	0403-001327 DIODE-ZENER;MTZJ18A,16.22-17.06V,500mW,D	
....4	DZ016	0403-001327 DIODE-ZENER;MTZJ18A,16.22-17.06V,500mW,D	
....4	DZ016	0403-001327 DIODE-ZENER;MTZJ18A,16.22-17.06V,500mW,D	
....4	DZ016	0403-001328 DIODE-ZENER;MTZJ22A,20.15-21.20V,500mW,D	
....4	DZ016	0403-001329 DIODE-ZENER;MTZJ24B,22.61-23.77V,500mW,D	
....4	DZ016	0403-001329 DIODE-ZENER;MTZJ24B,22.61-23.77V,500mW,D	

Loc. No.	Code No.	Description ; Specification	Remark
....4	DZ016	0403-001330 DIODE-ZENER;MTZJ30A,26.99-28.39V,500mW,D	
....4	DZ016	0403-001330 DIODE-ZENER;MTZJ30A,26.99-28.39V,500mW,D	
....4	DS805	0404-001056 DIODE-SCHOTTKY;RK16,60V,1.5A,DO-204AC,TP	
⚠ 4	QR401S	0501-000283 TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4	Q482	0501-000283 TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4	Q432	0501-000283 TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4	Q461	0501-000389 TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4	Q471	0501-000389 TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4	Q474	0501-000389 TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4	Q481	0501-000389 TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4	Q851	0501-000389 TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4	QS801	0501-000389 TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4	QS802	0501-000389 TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4	Q301	0501-000389 TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4	Q381	0501-000389 TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4	Q382	0501-000389 TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4	Q401	0501-000389 TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4	Q402	0501-000389 TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4	Q421	0501-000389 TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4	Q451	0501-000389 TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
⚠ 4	IC012	1203-001217 IC-POSI.ADJUST REG.;431,TO-92,3P,4.58MIL	
⚠ 4	VP801S	1405-000152 VARISTOR;560V,2500A,14x8.5mm,TP	
....4	R125	2001-000005 R-CARBON;390ohm,5%,1/8W,AA,TP,1.8x3.2mm	
....4	R125	2001-000006 R-CARBON;2.4KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000009 R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000009 R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R308	2001-000016 R-CARBON(S);10HM,5%,1/2W,AA,TP,2.4X6.4MM	
....4	R470	2001-000028 R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
....4	R422	2001-000028 R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
....4	R836	2001-000052 R-CARBON(S);3.3KOHM,5%,1/2W,AA,TP,2.4X6.	
....4	R493	2001-000052 R-CARBON(S);3.3KOHM,5%,1/2W,AA,TP,2.4X6.	
....4	RS804	2001-000066 R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4	R855	2001-000066 R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4	RS808	2001-000066 R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4	RS803	2001-000085 R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
....4	R814	2001-000085 R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
....4	R813	2001-000085 R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
....4	R812	2001-000085 R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
....4	R439	2001-000085 R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
....4	R438	2001-000085 R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
....4	R811	2001-000085 R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
....4	R834	2001-000109 R-CARBON(S);470OHM,5%,1/2W,AA,TP,2.4X6.4	
....4	R125	2001-000258 R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000262 R-CARBON;1.8MOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000273 R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000362 R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000429 R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000429 R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000429 R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000449 R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000508 R-CARBON;220KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000515 R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000522 R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000577 R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000577 R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000577 R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000613 R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000613 R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000734 R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000734 R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000734 R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000734 R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000734 R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000761 R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000761 R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000761 R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000761 R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000761 R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000786 R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000800 R-CARBON;5.1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000800 R-CARBON;5.1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000812 R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2MM	

Loc. No.	Code No.	Description ; Specification	Remark
....4 R125	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-001031	R-CARBON;91KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RS807	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R854	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R839	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R413	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
⚠ 4 RR401S	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R434	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R837	2001-001108	R-CARBON(S);22KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R468	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 RS802	2001-001124	R-CARBON(S);3.9OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R433	2001-001155	R-CARBON(S);5.6KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R410	2001-001155	R-CARBON(S);5.6KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 RS806	2001-001168	R-CARBON(S);6.8KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R459	2001-001192	R-CARBON(S);820OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R851	2001-001196	R-CARBON(S);9.1KOHM,5%,1/2W,AA,TP,2.4X6.	
⚠ 4 RP801S	2002-001010	R-COMPOSITION;1.8Mohm,5%,1/2W,AA,TP,3.7x	
⚠ 4 RY801S	2002-001013	R-COMPOSITION;4.7Mohm,5%,1/2W,AA,TP,3.7x	
....4 R428	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
....4 R428A	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
....4 R429	2003-000586	R-METAL OXIDE(S);22Kohm,5%,2W,AF,TP,4x12	
....4 R430	2003-000586	R-METAL OXIDE(S);22Kohm,5%,2W,AF,TP,4x12	
....4 R463	2003-001024	R-METAL OXIDE(S);150ohm,5%,2W,AF,TP,3.9x	
....4 R310	2003-001024	R-METAL OXIDE(S);150ohm,5%,2W,AF,TP,3.9x	
....4 R460	2003-002044	R-METAL OXIDE(S);100ohm,5%,1W,AF,TP,2.5x	
....4 R426	2003-002153	R-METAL OXIDE;4.7OHM,5%,2W,AG,TP,6X16MM	
....4 R443A	2003-002156	R-METAL OXIDE;560OHM,5%,2W,AG,TP,6X16MM	
....4 R443	2003-002156	R-METAL OXIDE;560OHM,5%,2W,AG,TP,6X16MM	
....4 R464	2003-002158	R-METAL OXIDE;0.68OHM,5%,1W,AG,TP,4.3X12	
....4 R421	2003-002159	R-METAL OXIDE;150OHM,5%,1W,AG,TP,4.3X12M	
....4 R024	2004-001369	R-METAL(S);1.2Kohm,1%,1/2W,AA,TP,2.4x6.4	
....4 R024	2004-001386	R-METAL(S);16.9Kohm,1%,1/2W,AA,TP,2.4x6.	
....4 R024	2004-001395	R-METAL(S);330Kohm,2%,1/2W,AA,TP,2.4x6.4	
....4 R024	2004-001408	R-METAL(S);91Kohm,1%,1/2W,AA,TP,2.4x6.4m	
....4 R024	2004-001892	R-METAL(S);162Kohm,1%,1/2W,AA,TP,2.5x6.5	
....4 R024	2004-001892	R-METAL(S);162Kohm,1%,1/2W,AA,TP,2.5x6.5	
....4 R024	2004-001897	R-METAL(S);43.2Kohm,1%,1/2W,AA,TP,2.5x6.	
....4 R024	2004-001897	R-METAL(S);43.2Kohm,1%,1/2W,AA,TP,2.5x6.	
....4 R024	2004-001984	R-METAL(S);26.7Kohm,1%,1/2W,AA,TP,2.4x6.	
....4 R024	2004-001984	R-METAL(S);26.7Kohm,1%,1/2W,AA,TP,2.4x6.	
....4 R024	2004-001984	R-METAL(S);26.7Kohm,1%,1/2W,AA,TP,2.4x6.	
....4 R024	2004-002011	R-METAL(S);110Kohm,1%,1/2W,AA,TP,2.4x6.4	
....4 R024	2004-004001	R-METAL(S);180Kohm,1%,1/2W,AA,TP,2.5x6.5	
....4 R024	2004-004046	R-METAL(S);430Kohm,1%,1/2W,AA,TP,2.5x6.5	
....4 R024	2004-004046	R-METAL(S);430Kohm,1%,1/2W,AA,TP,2.5x6.5	
....4 R024	2004-004366	R-METAL(S);1.3Kohm,1%,1/2W,AA,TP,2.5x6.5	
....4 R472	2008-000252	R-FUSIBLE(S);0.47ohm,10%,1/2W,AF,TP,2.5x	
....4 R465	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
....4 R449	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
....4 R445	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
....4 R442	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
....4 R441	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
....4 R447	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
....4 R442A	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
....4 R307	2008-000290	R-FUSIBLE(S);2.4ohm,5%,2W,AF,TP,3.9x10mm	
....4 R486	2008-001018	R-FUSIBLE(S);0.47ohm,10%,2W,AF,TP,3.9x10	
....4 R838	2008-001053	R-FUSIBLE;22ohm,5%,1/2W,AF,TP,2.5x6.5mm	
....4 R437	2008-001087	R-FUSIBLE(S);1.8ohm,5%,2W,AG,TP,3.9x12mm	
....4 R485	2008-001137	R-FUSIBLE(S);3.3ohm,5%,1W,AF,TP,3.9x10mm	
....4 R405	2009-001109	R-TEMPERATURE;240ohm,5%,1/4W,AA,TP,2.3x6	
⚠ 4 RR471S	2103-001024	VR-SEMI;50Kohm,25%,0.3W,TOP	
⚠ 4 RR402S	2103-001086	VR-SEMI;100KOHM,25%,0.3W,TOP	
....4 C598	2201-000119	C-CERAMIC,DISC;100NF,+80-20%,50V,Y5V,TP,	
....4 C598	2201-000119	C-CERAMIC,DISC;100NF,+80-20%,50V,Y5V,TP,	
....4 C598	2201-000119	C-CERAMIC,DISC;100NF,+80-20%,50V,Y5V,TP,	
....4 C598	2201-000119	C-CERAMIC,DISC;100NF,+80-20%,50V,Y5V,TP,	
....4 C598	2201-000132	C-CERAMIC,DISC;0.1NF,10%,500V,Y5P,TP,6.5	
....4 C598	2201-000132	C-CERAMIC,DISC;0.1NF,10%,500V,Y5P,TP,6.5	
....4 C598	2201-000132	C-CERAMIC,DISC;0.1NF,10%,500V,Y5P,TP,6.5	
....4 C598	2201-000132	C-CERAMIC,DISC;0.1NF,10%,500V,Y5P,TP,6.5	
....4 C598	2201-000132	C-CERAMIC,DISC;0.1NF,10%,500V,Y5P,TP,6.5	
....4 C598	2201-000138	C-CERAMIC,DISC;0.1NF,10%,50V,Y5P,TP,4X4M	
....4 C598	2201-000146	C-CERAMIC,DISC;0.1NF,5%,50V,SL,TP,5X3.5M	
....4 C598	2201-000146	C-CERAMIC,DISC;0.1NF,5%,50V,SL,TP,5X3.5M	
....4 C598	2201-000180	C-CERAMIC,DISC;10NF,10%,50V,Y5V,TP,7X3MM	
....4 C598	2201-000180	C-CERAMIC,DISC;10NF,10%,50V,Y5V,TP,7X3MM	
....4 C598	2201-000017	C-CERAMIC,DISC;1NF,10%,50V,Y5P,TP,5X3.5M	

Loc. No.	Code No.	Description ; Specification	Remark
....4 C598	2201-000017	C-CERAMIC,DISC;1NF,10%,50V,Y5P,TP,5X3.5M	
....4 C598	2201-000017	C-CERAMIC,DISC;1NF,10%,50V,Y5P,TP,5X3.5M	
....4 C598	2201-000332	C-CERAMIC,DISC;2.2NF,20%,250V,Y5U,TP,9X4	
....4 C598	2201-000332	C-CERAMIC,DISC;2.2NF,20%,250V,Y5U,TP,9X4	
....4 C598	2201-000332	C-CERAMIC,DISC;2.2NF,20%,250V,Y5U,TP,9X4	
....4 C598	2201-000370	C-CERAMIC,DISC;0.22NF,10%,50V,Y5P,TP,4X3	
....4 C598	2201-000406	C-CERAMIC,DISC;0.27NF,10%,2KV,Y5P,TP,6.3	
....4 C598	2201-000551	C-CERAMIC,DISC;0.47NF,10%,1KV,Y5P,TP,6.3	
....4 C598	2201-000551	C-CERAMIC,DISC;0.47NF,10%,1KV,Y5P,TP,6.3	
....4 C598	2201-000551	C-CERAMIC,DISC;0.47NF,10%,1KV,Y5P,TP,6.3	
....4 C598	2201-000551	C-CERAMIC,DISC;0.47NF,10%,1KV,Y5P,TP,6.3	
....4 C598	2201-000551	C-CERAMIC,DISC;0.47NF,10%,1KV,Y5P,TP,6.3	
....4 C598	2201-000558	C-CERAMIC,DISC;0.47NF,10%,50V,Y5P,TP,5X3	
....4 C478	2301-000020	C-FILM,PEF;27nF,5%,100V,TP,7.3x4x12.5mm,	
....4 C479	2301-000200	C-FILM,PEF;2.2nF,5%,200V,TP,11.0x6.0x9.0	
....4 C477	2301-000213	C-FILM,PEF;220nF,5%,250V,TP,21.5x11,7.5	
....4 CS801	2301-000356	C-FILM,PEF;47nF,5%,50V,TP,7.5x4.0x6.5,5m	
....4 C493	2301-000356	C-FILM,PEF;47nF,5%,50V,TP,7.5x4.0x6.5,5m	
....4 C412	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
....4 C831	2301-001216	C-FILM,PPF;47nF,5%,630V,TP,20x14.5x22,7.	
....4 C460	2303-000331	C-FILM,PPF;4.7nF,5%,630V,TP,19.5x12x7,7.	
....4 C311	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
....4 C487	2305-000178	C-FILM,MPEF;10nF,5%,100V,TP,-,5mm	
....4 C309	2305-000285	C-FILM,MPEF;220NF,5%,100V,TP,10.5X5.5X15	
....4 C838	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
....4 C865	2305-000427	C-FILM,MPEF;47nF,5%,100V,TP,7.5x12.5x3.5	
....4 C303	2305-000427	C-FILM,MPEF;47nF,5%,100V,TP,7.5x12.5x3.5	
....4 C301	2305-000427	C-FILM,MPEF;47nF,5%,100V,TP,7.5x12.5x3.5	
....4 C429	2305-000704	C-FILM,MPEF;100nF,5%,250V,TP,16.5x10.3x5	
....4 C428	2306-000122	C-FILM,MPPF;100nF,5%,50V,TP,7.3x4.0x5.0m	
....4 C480	2306-000122	C-FILM,MPPF;100nF,5%,50V,TP,7.3x4.0x5.0m	
....4 C701	2401-000164	C-AL;1000uF,20%,25V,WT,TP,12.5x20,5	
....4 C701	2401-000262	C-AL;100uF,20%,160V,HR,TP,16x25,7.5	
....4 C701	2401-000262	C-AL;100uF,20%,160V,HR,TP,16x25,7.5	
....4 C701	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
....4 C701	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
....4 C701	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
....4 C701	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
....4 C701	2401-000365	C-AL;100uF,20%,50V,WT,TP,10x12.5mm,	
....4 C701	2401-000365	C-AL;100uF,20%,50V,WT,TP,10x12.5mm,	
....4 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000603	C-AL;1UF,20%,50V,GP,TP,5X11,2	
....4 C701	2401-000660	C-AL;2.2uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000703	C-AL;2200uF,20%,25V,GP,-,12.5x25mm,	
....4 C701	2401-001026	C-AL;3.3UF,20%,50V,GP,TP,5X11,5	
....4 C701	2401-001026	C-AL;3.3UF,20%,50V,GP,TP,5X11,5	
....4 C701	2401-001192	C-AL;33uF,20%,50V,GP,TP,6.3x11,5	
....4 C701	2401-001397	C-AL;470uF,20%,25V,GP,TP,10x16,5	
....4 C701	2401-001428	C-AL;470uF,20%,50V,GP,TP,10x20,5	
....4 C701	2401-001527	C-AL;47uF,20%,250V,HR,TP,13x25mm,5m	
....4 C701	2401-001622	C-AL;6.8uF,20%,50V,BP,TP,16x25mm,7.	
....4 C701	2401-000025	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
....4 C701	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
....4 C701	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
....4 C701	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
....4 C701	2401-002216	C-AL;2200uF,20%,35V,GP,TP,16x25,7.5	
....4 C701	2401-002216	C-AL;2200uF,20%,35V,GP,TP,16x25,7.5	
....4 C701	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
....4 C701	2401-002288	C-AL;470uF,20%,25V,WT,TP,10x20,5	
....4 C701	2401-002288	C-AL;470uF,20%,25V,WT,TP,10x20,5	
....4 C701	2401-002300	C-AL;47uF,20%,50V,GP,TP,6.3x11,5	
....4 C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
....4 C701	2401-003114	C-AL;4.7uF,20%,250V,WT,TP,10x16,5	
....4 L431	2701-000116	INDUCTOR-AXIAL;10uH,10%,4.2x9.8mm	
....4 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
....4 F101	2901-000299	FILTER-EMI ON BOARD;-,6A,UL/CSA,-,9x7.5,	
....4 G101	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
....4 G101	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	

Loc. No.	Code No.	Description ; Specification	Remark
....4 G101	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
....4 G101	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
....4 G101	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
....4 G101	3301-000374	CORE-FERRITE BEAD;AA,3.5x1.0x9.0mm,-,-	
....4 G101	3301-000374	CORE-FERRITE BEAD;AA,3.5x1.0x9.0mm,-,-	
⚠ 4 FD801S	3601-000120	FUSE-AXIAL LEAD;125V,2.5A,FAST-ACTING,GL	
⚠ 4 FD871S	3601-001086	FUSE-AXIAL LEAD;125V,5A,FAST-ACTING,GLAS	
⚠ 4 FD854S	3601-001086	FUSE-AXIAL LEAD;125V,5A,FAST-ACTING,GLAS	
⚠ 4 FD805S	3601-001086	FUSE-AXIAL LEAD;125V,5A,FAST-ACTING,GLAS	
....4 F801B	3602-000114	FUSE-HOLDER;-,-,30mohm	
....4 F801A	3602-000114	FUSE-HOLDER;-,-,30mohm	
....4 CN906	3711-002645	CONNECTOR-HEADER;BOX,6P,1R,2.5mm,STRAIGH	
....4 EY45	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY44	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY43	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY36	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY35	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY34	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY31	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY30	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY67	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY66	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY65	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY64	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY50	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY49	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY47	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY46	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY21	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY20	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY19	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY18	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY17	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY16	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY155	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY154	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY29	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY28	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY27	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY26	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY25	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY24	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY23	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY22	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY91	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY90	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY89	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY88	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY87	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY86	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY85	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY99	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY98	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY97	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY96	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY95	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY94	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY93	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY92	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY75	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY74	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY73	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY72	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY71	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY70	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY69	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY68	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY82	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY81	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY80	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY79	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY78	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY77	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY76	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY153	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY111	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY11	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A

Loc. No.	Code No.	Description ; Specification	Remark
....4 EY109	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY108	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY107	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY106	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY12	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY119	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY118	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY117	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY116	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY115	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY114	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY113	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY08	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY07	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY06	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY05	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY04	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY03	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY02	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY01	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY105	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY104	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY103	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY102	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY101	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY100	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY10	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY09	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY141	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY140	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY14	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY139	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY138	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY137	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY136	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY135	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY152	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY151	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY150	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY15	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY149	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY148	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY147	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY142	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY127	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY126	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY125	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY124	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY123	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY122	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY121	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY120	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY134	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY133	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY132	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY131	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY128	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY129	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY13	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY130	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY83	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY84	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY32	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY37	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY38	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EY52	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EY53	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EY54	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EY55	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EY51	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EY42	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EY41	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EY40	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EY63	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EY62	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EY61	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EY60	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A

Loc. No.	Code No.	Description ; Specification	Remark
....4 EY59	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EY58	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EY57	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EY56	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL08	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL07	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL06	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL05	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL04	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL03	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL02	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL01	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EY39	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL16	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL15	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL14	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL10	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL11	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL12	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL13	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 GT35	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT34	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT33	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT404	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT801	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT802	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT810	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT811	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT14	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT15	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT16	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT17	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT807	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT433	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 T0083	0402-001286	DIODE-RECTIFIER;RP1H,2000V,.1A,-,TP	
....4 R024	2004-001893	R-METAL(S);22Kohm,1%,1/2W,AA,TP,2.5x6.5m	
....4 R024	2004-001402	R-METAL(S);6.8Kohm,1%,1/2W,AA,TP,2.4x6.4	
....4 R462	2008-001145	R-FUSIBLE;4.7OHM,5%,1/2W,AF,TP,2.5X6.5MM	
....4 R125	2001-000745	R-CARBON;4.7OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 C701	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
....4 C701	2401-001655	C-AL;680uF,20%,25V,GP,TP,10x20,5	
....4 C871	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	
....4 C701	2401-001486	C-AL;47uF,20%,160V,HR,TP,13x20mm,5m	
....4 R431	2001-001153	R-CARBON(S);47OHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 G101	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
....4 R833	2009-000017	R-METAL PLATE;0.1ohm,10%,5W,CL,TP,5x14x1	
....4 C701	2401-001625	C-AL;6.8uF,20%,50V,GP,TP,5x11,5	
⚠ 4 FD802S	3601-001228	FUSE-AXIAL LEAD;125V,10A,FAST-ACTING,EPO	
⚠ 4 FD855S	3601-001228	FUSE-AXIAL LEAD;125V,10A,FAST-ACTING,EPO	
....4 R306	2008-001076	R-FUSIBLE(S);1.8ohm,5%,2W,AF,TP,3.9x10mm	
....4 R125	2001-000554	R-CARBON;270OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R427	2003-002152	R-METAL OXIDE;1OHM,5%,2W,AG,TP,6X16MM	
....4 R427A	2003-002152	R-METAL OXIDE;1OHM,5%,2W,AG,TP,6X16MM	
....4 C701	2401-000698	C-AL;2200uF,20%,16V,WT,TP,12.5x25,5	
....4 R424	2008-000289	R-FUSIBLE(S);1ohm,5%,1W,AA,TP,3.9x10mm	
....4 C432	2303-000002	C-FILM,PPF;8.2nF 5% 400V TP 19X18X7,7.5m	
....4 C438	2303-000002	C-FILM,PPF;8.2nF 5% 400V TP 19X18X7,7.5m	
....4 R440	2008-000282	R-FUSIBLE;0.47ohm,5%,1W,AA,TP,3.9x12mm	
....4 R831	2003-000512	R-METAL OXIDE(S);15Kohm,5%,3W,AA,TP,6x16	
....4 R832	2003-000512	R-METAL OXIDE(S);15Kohm,5%,3W,AA,TP,6x16	
....4 R425	2003-000417	R-METAL OXIDE(S);1.2Kohm,5%,3W,AA,TP,6x1	
....4 R853	2008-001152	R-FUSIBLE(S);1.3KOHM,5%,1/2W,AA,TP,2.5X6	
....4 0	AA41-00598D	PCB-SUB;HCM4215W,CEM-1,1L,D,1.6T,330X245	S.N.A
....4 R024	2004-005051	R-METAL(S);2.2KOHM,1%,1/2W,AA,TP,2.4X6.4	
⚠ 4 RS801S	3601-000102	FUSE-AXIAL LEAD;125V,1A,FAST-ACTING,GLAS	
....4 R840	2001-001045	R-CARBON(S);1.2KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R841	2003-002102	R-METAL OXIDE(S);68Kohm,5%,2W,AF,TP,4x12	
....4 R024	2004-004029	R-METAL(S);10Kohm,1%,1/2W,AA,TP,2.5x6.5m	
....4 R801	2003-002285	R-METAL OXIDE(S);1.5KOHM,5%,2W,AF,TP,6X1	
....4 DZ016	0403-000698	DIODE-ZENER;TZP12A,12V,11.4-12.6V,1W,DO-	
....4 Q409	0505-001723	FET-SILICON;FQP630TSTU,N,200V,9A,0.4OHM,	
....4 Q409	0505-001723	FET-SILICON;FQP630TSTU,N,200V,9A,0.4OHM,	
...3 Q431	BH99-00033H	ASSY HEAT/SINK;BH62-00038A,SPRING,FJL692	S.N.A
....4 T0083	0402-001296	DIODE-RECTIFIER;FMP-3FU,1.5KV,5A,TO-3PF,	
....4 T0060	BH61-70003A	SPRING ETC;CVT4857,STS304-W1/2H,W3.8,-,L	S.N.A
....4 T0090	0502-001230	TR-POWER;FJL6920YDTU,N,200000MW,TO-264 F	
....4 CIS	BH62-00038B	HEAT SINK-FBT;COMMANDO,A1050S,T2.0,85*80	S.N.A

Loc. No.	Code No.	Description ; Specification	Remark
....4 CIS	BH73-00028A	SILICON/RUBBER-HS;CDT ALL,SILICON,26*33*	S.N.A
....4 CIS	0205-001027	OIL-SILICON;G746,-,-	S.N.A
⚠ ...3 TS801S	BP26-00001A	TRANS SWITCHING-POWER;19B012,P55A,HCM421	
⚠ ...3 PC801S	0604-001032	PHOTO-COUPLER;TR,170-260%,300mW,DIP-4,ST	
⚠ ...3 PC811S	0604-001032	PHOTO-COUPLER;TR,170-260%,300mW,DIP-4,ST	
...3 DU410	1201-000191	IC-OP AMP;4558,DIP,8P,300MIL,DUAL,20V/mV	
...3 T0086	1203-000610	IC-PWM CONTROLLER;494,DIP,16P,300MIL,PLA	
...3 IC851	1203-001400	IC-POWER PRESCALER;SE110N,T0-220(SIP),3P	
...3 C598	2201-000446	C-CERAMIC,DISC;3.3NF,20%,400V,Y5U,TP,15X	
...3 C598	2201-000446	C-CERAMIC,DISC;3.3NF,20%,400V,Y5U,TP,15X	
...3 C598	2201-000446	C-CERAMIC,DISC;3.3NF,20%,400V,Y5U,TP,15X	
...3 C598	2201-000446	C-CERAMIC,DISC;3.3NF,20%,400V,Y5U,TP,15X	
⚠ ...3 CR471S	2301-001091	C-FILM,MPPF;470nF,5%,400V,TP,26x21.5x14.	
⚠ ...3 CR436S	2306-000235	C-FILM,MPPF;560nF,5%,400V,TP,26*22.5*14,	
...3 C491	2306-000322	C-FILM,MPPF;12nF,5%,1.6KV,TP,29x20.5x13,	
⚠ ...3 CR473S	2306-000322	C-FILM,MPPF;12nF,5%,1.6KV,TP,29x20.5x13,	
⚠ ...3 CR474S	2306-000326	C-FILM,MPPF;4.7nF,5%,1.6KV,TP,28.5x16x9m	
...3 L862	AA27-10001C	COIL CHOKE;-,100uH,K,-,5.0A,ST,700UH-K(R	
...3 L863	AA27-10001C	COIL CHOKE;-,100uH,K,-,5.0A,ST,700UH-K(R	
⚠ ...3 LX801S	AA29-30002L	FILTER LINE NOISE;-,10mHMIN,5A,AC90~260V	
⚠ ...3 LX802S	AA29-30002M	FILTER LINE NOISE;-,1mHMIN,5A,AC90~260V,	
⚠ ...3 LX803S	AA29-30002M	FILTER LINE NOISE;-,1mHMIN,5A,AC90~260V,	
⚠ ...3 LX804S	AA29-30002M	FILTER LINE NOISE;-,1mHMIN,5A,AC90~260V,	
...3 C701	2401-000142	C-AL;1000uF,20%,16V,WT,TP,10x20,5	
...3 L864	AA27-10002L	COIL CHOKE;-,24uH,K,-,2A,-,24UH-K,10x10m	
...3 T0086	1203-002177	IC-PWM CONTROLLER;VIPER12ADIP,DIP,8P,300	
...3 IC421	AA96-00475B	ASSY H/S;SILICON-OIL,FMLG-12S(4),AA62-00	S.N.A
....4	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4 T0083	0402-000233	DIODE-RECTIFIER;FML-G12S,200V,5A,-,-	
....4 IC012	1203-000165	IC-POSI.ADJUST REG.;78R12,TO-220,4P,-,PL	
....4 T0081	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
....4	AA62-00066B	HEAT SINK;D2,D3,AL ,T1.0,89,70,-,AA62-00	S.N.A
...3 C814	2301-001041	C-FILM,PPF;15nF,5%,1.6KV,TP,29x14x21.5,2	
...3 DZS801	0406-001007	DIODE-TVS;P6KE180A,171/180/189V,600W,CAS	
⚠ ...3 T801S	BP26-00002A	TRANS SWITCHING;EER5345,P55A,160V~280V,P	
⚠ ...3 CR430S	2301-001343	C-FILM,MPPF;3.9nF,5%,2kV,TP,29x9.5x16mm,	
⚠ ...3 CR431S	2301-001343	C-FILM,MPPF;3.9nF,5%,2kV,TP,29x9.5x16mm,	
⚠ ...3 T432	AA26-00053A	TRANS;-,-,-,1.2mH,-,-,-,-,-,-,31.5KHZ,-,	
...3 T0076	BP39-00014A	LEAD CONNECTOR-ASSY;P55A/HCM4215W,UL1007	
...3 T0121	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
...3 T0090	0502-000405	TR-POWER;-,NPN,70W,TO-220,BK,10	
...3 T0123	1203-001006	IC-VOLTAGE REGULATOR;78R05,TO-220F,4P,-,	
...3	BP39-00017A	LEAD CONNECTOR;P55A/HCM4215W,UL1617#22,U	
....4 T0121	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
...3 GT01	AA60-40012D	PIN-GT,ASSY;T1.6,6-12.5-,NYLON66	S.N.A
...3 CN906	3711-003043	CONNECTOR-HEADER;BOX,4P,1R,2.5MM,STRAIGH	
...3 C598	2201-000963	C-CERAMIC,DISC;1NF,20%,400V,Y5U,TP,9.5X6	
...3 C598	2201-000963	C-CERAMIC,DISC;1NF,20%,400V,Y5U,TP,9.5X6	
...3 IC012	1203-000162	IC-POSI.ADJUST REG.;317,TO-220,3P,-,PLAS	
...3 C701	2401-000787	C-AL;220uF,20%,160V,GP,TP,16x31.5mm	
⚠ ...3 VX801S	1405-000187	VARISTOR;750V,1250A,12.5x7mm,TP	
...3 C832	2301-001418	C-FILM,MPPF;1.5nF,5%,2kV,TP,29x7x13.5mm,	
...3 L432	AA27-00056A	COIL HORIZ. WIDTH;-,600uH,YL9N 15x27.5 C	
...3 R384	2002-001079	R-COMPOSITION;470Kohm,5%,1/2W,AA,TP,4x10	
...3 Q473	BP96-00006B	ASSY HEAT SINK P;HS,SCREW,IRF640B,2SC412	S.N.A
....4 CIS	0205-001027	OIL-SILICON;G746,-,-	S.N.A
....4 T0090	0502-001100	TR-POWER;2SC4125,NPN,70W,TO-3PML,BK,8-	
....4 Q409	0505-001722	FET-SILICON;IRFS640B,N,200V,18A,0.18OHM,	
....4 T0081	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
....4 CIS	AA60-30001A	WASHER-PLATE;M3,ID3.5,15X8.5,T1.0,SBHG	S.N.A
....4 CIS	BP62-00001A	HEAT SINK;COMMANDO,A1050P,T2.0,W62.0,H50	S.N.A
..2 T0099	AA94-08582A	ASSY PCB MISC-CRT;COMMANDO,C2	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3 VR501	2101-000321	VR-ROTARY;1Mohm,-,0.6W,SIDE	
...3 VR531	2101-000321	VR-ROTARY;1Mohm,-,0.6W,SIDE	
...3 VR561	2101-000321	VR-ROTARY;1Mohm,-,0.6W,SIDE	
...3 V561	3704-001019	SOCKET-CRT;10P,29.1PI,35.5PI,AU30U,-	
...3 V531	3704-001019	SOCKET-CRT;10P,29.1PI,35.5PI,AU30U,-	
...3 V501	3704-001019	SOCKET-CRT;10P,29.1PI,35.5PI,AU30U,-	
...3 CN906	3711-003052	CONNECTOR-HEADER;BOX,10P,1R,2.5MM,STRAIG	
...3 CN906	3711-003052	CONNECTOR-HEADER;BOX,10P,1R,2.5MM,STRAIG	
...3 CN906	3711-003973	CONNECTOR-HEADER;BOX,11P,1R,2.5mm,STRAIG	
...3 CN906	3711-003973	CONNECTOR-HEADER;BOX,11P,1R,2.5mm,STRAIG	
...3 SG301	4715-001050	SURGE ABSORBER;2.4kV,20%,1500A,-,DISC-RA	
...3 SG562	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm MIN,	
...3 SG532	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm MIN,	
...3 SG502	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm MIN,	

Loc. No.		Code No.	Description ; Specification	Remark
...3	Q371	AA96-00244H	ASSY H/S;SCREW,2SC4636(2),CRT,SLICON-OIL	S.N.A
....4		0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4	T0090	0502-000442	TR-POWER;2SC4636RB,NPN,2W,TO-220,ST,10-	
....4	T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
....4		AA62-00046A	HEAT SINK-PS;-,-,T1.0,-,D1(DREAM) 60X25X	S.N.A
...3	IC561	AA96-50311L	ASSY H/S;-,AMP,AA62-30175D ,TDA6111Q,HE	S.N.A
...3	IC531	AA96-50311L	ASSY H/S;-,AMP,AA62-30175D ,TDA6111Q,HE	S.N.A
...3	IC501	AA96-50311L	ASSY H/S;-,AMP,AA62-30175D ,TDA6111Q,HE	S.N.A
....4	T0074	1201-001131	IC-VIDEO AMP;6111,SIP,9P,-,SINGLE,-,PLAS	
....4	T0081	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
....4		AA62-30175D	HEAT SINK-PS;-,SECC,T1.0,-,33X15X30 FT-2	S.N.A
...3		AA97-07608A	ASSY AUTO-CRT;HCM4215W	S.N.A
....4	D372	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4	D504	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4	D509	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4	D361	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4	D362	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4	D371	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4	D510	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4	T0083	0402-000493	DIODE-RECTIFIER;1R5GU41,400V,1.5A,DO-15L	
....4	T0083	0402-000493	DIODE-RECTIFIER;1R5GU41,400V,1.5A,DO-15L	
....4	T0083	0402-000493	DIODE-RECTIFIER;1R5GU41,400V,1.5A,DO-15L	
....4	T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4	T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4	T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4	T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4	T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4	T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4	DZ016	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
....4	DZ016	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
....4	DZ016	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
....4	DZ016	0403-000708	DIODE-ZENER;MTZJ13B,13V,12.55-13.21V,500	
....4	DZ016	0403-000708	DIODE-ZENER;MTZJ13B,13V,12.55-13.21V,500	
....4	DZ016	0403-000708	DIODE-ZENER;MTZJ13B,13V,12.55-13.21V,500	
....4	DZ016	0403-000708	DIODE-ZENER;MTZJ13B,13V,12.55-13.21V,500	
....4	Q563	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4	Q534	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4	Q533	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4	Q504	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4	Q361	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4	Q362	0501-000366	TR-SMALL SIGNAL;KSC2330-Y,NPN,1W,TO-92L,	
....4	Q502	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4	T0090	0502-000006	TR-POWER;KSC1507,NPN,15W,TO-220,TP,120-	
....4	T0090	0502-000006	TR-POWER;KSC1507,NPN,15W,TO-220,TP,120-	
....4	T0090	0502-000006	TR-POWER;KSC1507,NPN,15W,TO-220,TP,120-	
....4	R125	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R584	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
....4	R554	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
....4	R524	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
....4	R580	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4	R550	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4	R520	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4	R577	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
....4	R547	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
....4	R517	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
....4	R366	2001-000109	R-CARBON(S);470OHM,5%,1/2W,AA,TP,2.4X6.4	
....4	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000539	R-CARBON;24KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000660	R-CARBON;33KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000723	R-CARBON;4.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000938	R-CARBON;68OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,1.8X3.2MM	

Loc. No.		Code No.	Description ; Specification	Remark
....4	R125	2001-001015	R-CARBON;9.1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R581	2001-001052	R-CARBON(S);1.5MOHM,5%,1/2W,AA,TP,2.4X6.	
....4	R551	2001-001052	R-CARBON(S);1.5MOHM,5%,1/2W,AA,TP,2.4X6.	
....4	R521	2001-001052	R-CARBON(S);1.5MOHM,5%,1/2W,AA,TP,2.4X6.	
....4	R371	2001-001065	R-CARBON(S);110KOHM,5%,1/2W,AA,TP,2.4X6.	
....4	R370	2001-001065	R-CARBON(S);110KOHM,5%,1/2W,AA,TP,2.4X6.	
....4	R369A	2001-001065	R-CARBON(S);110KOHM,5%,1/2W,AA,TP,2.4X6.	
....4	R367	2001-001065	R-CARBON(S);110KOHM,5%,1/2W,AA,TP,2.4X6.	
....4	R368	2001-001065	R-CARBON(S);110KOHM,5%,1/2W,AA,TP,2.4X6.	
....4	R369	2001-001065	R-CARBON(S);110KOHM,5%,1/2W,AA,TP,2.4X6.	
....4	R567	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4	R537	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4	R507	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4	R381	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4	R361	2001-001097	R-CARBON(S);2.4KOHM,5%,1/2W,AA,TP,2.4X6.	
....4	R374	2001-001110	R-CARBON(S);240KOHM,5%,1/2W,AA,TP,2.4X6.	
....4	R373	2001-001110	R-CARBON(S);240KOHM,5%,1/2W,AA,TP,2.4X6.	
....4	R372	2001-001110	R-CARBON(S);240KOHM,5%,1/2W,AA,TP,2.4X6.	
....4	R377	2001-001110	R-CARBON(S);240KOHM,5%,1/2W,AA,TP,2.4X6.	
....4	R375	2001-001113	R-CARBON(S);270KOHM,5%,1/2W,AA,TP,2.4X6.	
....4	R365	2001-001120	R-CARBON(S);3.3OHM,5%,1/2W,AA,TP,2.4X6.4	
....4	R574	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W,AA,TP,2.4X6.	
....4	R544	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W,AA,TP,2.4X6.	
....4	R514	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W,AA,TP,2.4X6.	
....4	R583	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
....4	R582	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
....4	R553	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
....4	R552	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
....4	R523	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
....4	R522	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
....4	R589	2002-001015	R-COMPOSITION;47Kohm,5%,1/2W,AA,TP,3.7x9	
....4	R559	2002-001015	R-COMPOSITION;47Kohm,5%,1/2W,AA,TP,3.7x9	
....4	R529	2002-001015	R-COMPOSITION;47Kohm,5%,1/2W,AA,TP,3.7x9	
....4	R575	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
....4	R545	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
....4	R515	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
....4	R579	2002-001021	R-COMPOSITION;560KOHM,5%,1/2W,AA,TP,3.7X	
....4	R578	2002-001021	R-COMPOSITION;560KOHM,5%,1/2W,AA,TP,3.7X	
....4	R549	2002-001021	R-COMPOSITION;560KOHM,5%,1/2W,AA,TP,3.7X	
....4	R518	2002-001021	R-COMPOSITION;560KOHM,5%,1/2W,AA,TP,3.7X	
....4	R519	2002-001021	R-COMPOSITION;560KOHM,5%,1/2W,AA,TP,3.7X	
....4	R548	2002-001021	R-COMPOSITION;560KOHM,5%,1/2W,AA,TP,3.7X	
....4	R588	2003-000738	R-METAL OXIDE(S);56Kohm,5%,2W,AA,TP,4x12	
....4	R538	2003-000738	R-METAL OXIDE(S);56Kohm,5%,2W,AA,TP,4x12	
....4	R508	2003-000738	R-METAL OXIDE(S);56Kohm,5%,2W,AA,TP,4x12	
....4	R024	2004-001892	R-METAL(S);162Kohm,1%,1/2W,AA,TP,2.5x6.5	
....4	R024	2004-001892	R-METAL(S);162Kohm,1%,1/2W,AA,TP,2.5x6.5	
....4	R024	2004-001892	R-METAL(S);162Kohm,1%,1/2W,AA,TP,2.5x6.5	
....4	R573	2008-001129	R-FUSIBLE(S);1.5ohm,5%,1/2W,AF,TP,2.5x6.	
....4	R543	2008-001129	R-FUSIBLE(S);1.5ohm,5%,1/2W,AF,TP,2.5x6.	
....4	R513	2008-001129	R-FUSIBLE(S);1.5ohm,5%,1/2W,AF,TP,2.5x6.	
....4	C598	2201-000119	C-CERAMIC,DISC;100NF,+80-20%,50V,Y5V,TP,	
....4	C598	2201-000119	C-CERAMIC,DISC;100NF,+80-20%,50V,Y5V,TP,	
....4	C598	2201-000119	C-CERAMIC,DISC;100NF,+80-20%,50V,Y5V,TP,	
....4	C598	2201-000556	C-CERAMIC,DISC;0.47NF,10%,500V,Y5P,TP,5.	
....4	C598	2201-000723	C-CERAMIC,DISC;4.7NF,20%,3KV,Y5U,TP,16X5	
....4	C598	2201-000723	C-CERAMIC,DISC;4.7NF,20%,3KV,Y5U,TP,16X5	
....4	C598	2201-000723	C-CERAMIC,DISC;4.7NF,20%,3KV,Y5U,TP,16X5	
....4	C598	2201-000983	C-CERAMIC,DISC;1NF,10%,2KV,Y5P,TP,9X5MM,	
....4	C598	2201-000983	C-CERAMIC,DISC;1NF,10%,2KV,Y5P,TP,9X5MM,	
....4	C598	2201-000983	C-CERAMIC,DISC;1NF,10%,2KV,Y5P,TP,9X5MM,	
....4	C565	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
....4	C535	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
....4	C505	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
....4	C507	2305-000154	C-FILM,MPEF;100nF,5%,400V,TP,21.5x6.5x11	
....4	C537	2305-000154	C-FILM,MPEF;100nF,5%,400V,TP,21.5x6.5x11	
....4	C567	2305-000154	C-FILM,MPEF;100nF,5%,400V,TP,21.5x6.5x11	
....4	C361	2306-000122	C-FILM,MPPF;100nF,5%,50V,TP,7.3x4.0x5.0m	
....4	C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
....4	C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
....4	C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
....4	C701	2401-000133	C-AL;1000uF,20%,16V,GP,TP,10x20,5	
....4	C701	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
....4	C701	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
....4	C701	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
....4	C701	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
....4	C701	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	

Loc. No.	Code No.	Description ; Specification	Remark
....4 C701	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
....4 C701	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
....4 C701	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
....4 C701	2401-001621	C-AL;6.8uF,20%,450V,GP,TP,13x20,5	
....4 L531	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
....4 L501	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
....4 SG561	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
....4 SG563	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
....4 SG533	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
....4 SG501	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
....4 SG503	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
....4 SG531	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
....4 EL06	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EL03	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EL563	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL537	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL536	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL535	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL564	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL565	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL566	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL567	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL534	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL01	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL02	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL04	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL05	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL533	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL505	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL504	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL503	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 GT537	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT561	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT536	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT535	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT534	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT562	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT568	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT567	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT564	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT563	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT503	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT502	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT501	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT373	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT372	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT371	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT504	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT533	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT532	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT531	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT506	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT374	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT375	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 R125	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 DZ016	0403-000334	DIODE-ZENER;UZ2.7BSA,2.7V,2.54-2.75V,500	
....4 DZ016	0403-000334	DIODE-ZENER;UZ2.7BSA,2.7V,2.54-2.75V,500	
....4 DZ016	0403-000334	DIODE-ZENER;UZ2.7BSA,2.7V,2.54-2.75V,500	
....4 R566	2001-001049	R-CARBON(S);1.3KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R536	2001-001049	R-CARBON(S);1.3KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R506	2001-001049	R-CARBON(S);1.3KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R125	2001-000007	R-CARBON;3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000006	R-CARBON;2.4KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 C598	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.	
....4 C598	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.	
....4 C598	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.	
....4 C701	2401-001571	C-AL;47uF,+20%-0%,50V,GP,TP,8x11.5,	
....4 C701	2401-001571	C-AL;47uF,+20%-0%,50V,GP,TP,8x11.5,	
....4 C701	2401-001571	C-AL;47uF,+20%-0%,50V,GP,TP,8x11.5,	
....4 R125	2001-000319	R-CARBON;120KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000232	R-CARBON;1.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000908	R-CARBON;62KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000908	R-CARBON;62KOHM,5%,1/8W,AA,TP,1.8X3.2MM	

Loc. No.	Code No.	Description ; Specification	Remark
....4 R125	2001-000908	R-CARBON;62KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 L561	2701-000168	INDUCTOR-AXIAL;3.3uH,5%,2.5x3.4mm	
....4 R382	2002-001014	R-COMPOSITION;6.8Kohm,10%,1/2W,AA,TP,3.7	
....4 PCB	AA41-00600E	PCB-CRT;HCM4215W,FR-1,1L,E,1.6T,245X197(	S.N.A
....4 T0083	0402-000243	DIODE-RECTIFIER;RC2-V1,2000V,0.2A,DO-201	
...3 T0076	BP39-00004B	LEAD CONNECTOR-ASSY;P55A/HCM4215W,UL3239	
...3 T0076	BP39-00004C	LEAD CONNECTOR-ASSY;P55A/HCM4215W,UL3239	
...3 T0076	BP39-00004C	LEAD CONNECTOR-ASSY;P55A/HCM4215W,UL3239	
...3 T0076	AA39-00112A	LEAD CONNECTOR-ASSY;,UL1007#26,UL/CSA,10	
...3 T0076	AA39-20031D	LEAD CONNECTOR-ASSY;,9P,500,67096-009,S,	
...3 CN906	3711-002648	CONNECTOR-HEADER;BOX,9P,1R,2.5mm,STRAIGH	
...3 T0103	BP59-00005A	MODULE-FOCUS PACK ASS'Y;PJT TV,F301-P03A	
...3 T0076	AA39-00198D	LEAD CONNECTOR-ASSY;P55A/HCM4215W,UL1617	
...3 T0076	AA39-20010D	LEAD CONNECTOR-ASSY;,1P,400,YFH800-01,S,	
...3 T0076	AA39-20010D	LEAD CONNECTOR-ASSY;,1P,400,YFH800-01,S,	
...3 T0076	AA39-00120F	LEAD CONNECTOR-ASSY;SIR-T165,UL1007#26,U	
...3 T0076	AA39-20027B	LEAD CONNECTOR-ASSY;,6P,400,67096-006,S,	
...3 T0121	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
...3 T0076	AA39-20010B	LEAD CONNECTOR-ASSY;,1P,500,YFH800-01,S,	
...3 CN906	3711-002645	CONNECTOR-HEADER;BOX,6P,1R,2.5mm,STRAIGH	
...3 T0076	AA39-20010C	LEAD CONNECTOR-ASSY;,1P,600,YFH800-01,S,	
...3 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
...3	AA63-10002A	BAND-TIE;NYLON66 V2,L100,NTR	S.N.A
..2 T0094	AA95-02002A	ASSY SUB-PCB,CG AMP;COMMANDO	
...3	AA97-07418A	ASSY AUTO;HCM4215WX/XAA,P55A	S.N.A
....4 R125	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ109	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RZ108	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RZ107	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RZ106	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RZ105	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RZ104	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R857	2001-001155	R-CARBON(S);5.6KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R856	2001-001155	R-CARBON(S);5.6KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 RZ142	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ143	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ144	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ145	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ146	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ147	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ123	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ124	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ125	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ128	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ127	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ126	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ132	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ132A	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ148	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ148A	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ149	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ149A	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ129	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ129A	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ130	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ131A	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ131	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ130A	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RFZ50	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	

Loc. No.		Code No.	Description ; Specification	Remark
....4	RFZ51	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
....4	RFZ52	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
....4	RFZ53	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
....4	RFZ19	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
....4	RFZ20	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
....4	RFZ21	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
....4	RFZ22	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
....4	C598	2201-000327	C-CERAMIC,DISC;2.2NF,10%,50V,Y5V,TP,6.5X	
....4	C598	2201-000327	C-CERAMIC,DISC;2.2NF,10%,50V,Y5V,TP,6.5X	
....4	C598	2201-000327	C-CERAMIC,DISC;2.2NF,10%,50V,Y5V,TP,6.5X	
....4	C598	2201-000327	C-CERAMIC,DISC;2.2NF,10%,50V,Y5V,TP,6.5X	
....4	C689	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
....4	C689	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
....4	C689	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
....4	C689	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
....4	C689	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
....4	C689	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
....4	C689	2202-000205	C-CERAMIC,MLC-AXIAL;22pF,5%,50V,SL,TP,1.	
....4	C689	2202-000205	C-CERAMIC,MLC-AXIAL;22pF,5%,50V,SL,TP,1.	
....4	C689	2202-000205	C-CERAMIC,MLC-AXIAL;22pF,5%,50V,SL,TP,1.	
....4	C689	2202-000205	C-CERAMIC,MLC-AXIAL;22pF,5%,50V,SL,TP,1.	
....4	C689	2202-000205	C-CERAMIC,MLC-AXIAL;22pF,5%,50V,SL,TP,1.	
....4	CZ113	2202-000561	C-CERAMIC,MLC-RADIAL;0.68NF,5%,50V,C0G,T	
....4	CZ114	2202-000561	C-CERAMIC,MLC-RADIAL;0.68NF,5%,50V,C0G,T	
....4	C701	2401-000183	C-AL;1000uF,20%,35V,WT,TP,12.5x25,5	
....4	C701	2401-000183	C-AL;1000uF,20%,35V,WT,TP,12.5x25,5	
....4	C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4	C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4	LZ112	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
....4	LZ111	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
....4	LZ110	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
....4	LZ109	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
....4	LZ108	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
....4	LZ107	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
....4	FD102S	3601-001065	FUSE-AXIAL LEAD;125V,3.5A,FAST-ACTING,CE	
....4	FD101S	3601-001065	FUSE-AXIAL LEAD;125V,3.5A,FAST-ACTING,CE	
....4	ELZ01	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	ELZ02	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	ELZ03	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	C689	2202-000825	C-CERAMIC,MLC-AXIAL;680pF,10%,50V,Y5P,TP	
....4	C689	2202-000825	C-CERAMIC,MLC-AXIAL;680pF,10%,50V,Y5P,TP	
....4	C689	2202-000825	C-CERAMIC,MLC-AXIAL;680pF,10%,50V,Y5P,TP	
....4	C689	2202-000825	C-CERAMIC,MLC-AXIAL;680pF,10%,50V,Y5P,TP	
....4	C689	2202-000825	C-CERAMIC,MLC-AXIAL;680pF,10%,50V,Y5P,TP	
....4	C689	2202-000863	C-CERAMIC,MLC-AXIAL;560pF,10%,50V,Y5P,TP	
....4	C689	2202-000863	C-CERAMIC,MLC-AXIAL;560pF,10%,50V,Y5P,TP	
....4	C689	2202-000863	C-CERAMIC,MLC-AXIAL;560pF,10%,50V,Y5P,TP	
....4	C689	2202-000863	C-CERAMIC,MLC-AXIAL;560pF,10%,50V,Y5P,TP	
....4	C689	2202-000863	C-CERAMIC,MLC-AXIAL;560pF,10%,50V,Y5P,TP	
....4	C689	2202-000863	C-CERAMIC,MLC-AXIAL;560pF,10%,50V,Y5P,TP	
....4	R125	2001-000800	R-CARBON;5.1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	0	AA41-00601C	PCB;HCM4215W,PCB,CEM-1,1L,C,1.6,245X245,	S.N.A
....4	SGZ101	4715-000106	SURGE ABSORBER;300V,210-390V,-,-,AXIAL	S.N.A
...3	CN906	3711-003046	CONNECTOR-HEADER;BOX,9P,1R,2.5MM,STRAIGH	
...3	CN906	3711-003043	CONNECTOR-HEADER;BOX,4P,1R,2.5MM,STRAIGH	
...3	CN906	3711-003043	CONNECTOR-HEADER;BOX,4P,1R,2.5MM,STRAIGH	
...3	CN906	3711-003043	CONNECTOR-HEADER;BOX,4P,1R,2.5MM,STRAIGH	
...3	CN906	3711-003043	CONNECTOR-HEADER;BOX,4P,1R,2.5MM,STRAIGH	
...3	T0076	BP39-00005A	LEAD CONNECTOR-ASSY;P55A/HCM4215W,UL2547	
...3		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3	T0076	BP39-00015A	LEAD CONNECTOR-ASSY;P55A/HCM4215W,UL1185	
...3	CZ101	BP96-00005A	ASSY HEAT SINK P;BP62-00002A,SCREW,STK39	S.N.A
....4	T0081	6003-001021	SCREW-TAPTITE;RH,+,B,M3,L15,ZPC(YEL),SWR	S.N.A
....4	CIS	BP62-00002A	HEAT SINK;COMMANDO,A1050P,T2.0,W62.0,H14	S.N.A
....4	CIS	BP62-00008A	HEAT SINK;COMMANDO CG AMP,AL6063,T2.0,W1S.N.A	
....4	CIS	BP73-00002A	SILICON/RUBBER;COMMANDO CG AMP,SILICON ,	S.N.A
....4	T0074	1201-001225	IC-VIDEO AMP;392,SIP,22P,-,TRIPLE,-,PLAS	
...3		AA65-30110A	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,	S.N.A
...3		BP61-00076A	HOLDER-PUSH,A;42W5,NYLON6.6,NATURAL	S.N.A
...3		BP61-00077A	HOLDER-PUSH,B;42W5,NYLON6.6,NATURAL	S.N.A
..2	T0101	BP94-00134E	ASSY PCB MISC-SENSOR ASSY;SENSOR	
...3		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3	CN906	3711-000447	CONNECTOR-HEADER;BOX,3P,1R,2.5MM,ANGLE,-	
...3		BP97-00208A	ASSY SMD;0	S.N.A
....4	Q01	0501-000342	TR-SMALL SIGNAL;KSC1623-Y,NPN,200mW,SOT-	
....4	PCB	AA41-00853A	PCB-SERSOR;SVP-42W5HRC,FR-4,2L,A,1.6T,24	S.N.A
....4	D01	BP32-00001A	SENSOR PHOTO;BCS5030G1,-40 TO +85,0.42 U	

Loc. No.		Code No.	Description ; Specification	Remark
....4	R01	2007-000305	R-CHIP;10Mohm,5%,1/10W,TP,1608	
....4	R02	2007-000109	R-CHIP;1Mohm,5%,1/10W,TP,1608	
....4	R03	2007-000109	R-CHIP;1Mohm,5%,1/10W,TP,1608	
....4		0202-001167	SOLDER-CREAM;RX3603-2330HO,S45A,PASTE,SN	S.N.A
..2	T0073	BP94-00498A	ASSY PCB MAIN;HCN4727WX/XAA,P55A	
...3		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3	IC802	1203-000119	IC-NEGA.FIXED REG.;7905,TO-220,3P,-,PLAS	
...3	IC012	1203-000165	IC-POSI.ADJUST REG.;78R12,TO-220,4P,-,PL	
...3	C701	2401-000737	C-AL;2200uF,20%,50V,GP,TP,18x35.5,7	
...3	C701	2401-001068	C-AL;3300uF,20%,50V,GP,BK,22x40,10	
...3	X601	2801-004020	CRYSTAL-UNIT;18.432MHz,30ppm,28-AAM,12pF	
...3	CNZ01	3703-001150	CONNECTOR-BACK PANEL;32P,2R,FEMALE,STRAI	
...3	CNW02	3703-001150	CONNECTOR-BACK PANEL;32P,2R,FEMALE,STRAI	
...3	CNW01	3703-001150	CONNECTOR-BACK PANEL;32P,2R,FEMALE,STRAI	
...3	CN901	3703-001187	CONNECTOR-BACK PANEL;64P,2R,FEMALE,STRAI	
...3	CN906	3711-003046	CONNECTOR-HEADER;BOX,9P,1R,2.5MM,STRAIGH	
...3	CN906	3711-003641	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,STRAIG	
...3	CN906	3711-003973	CONNECTOR-HEADER;BOX,11P,1R,2.5mm,STRAIG	
...3	CN906	3711-003975	CONNECTOR-HEADER;BOX,14P,1R,2.5mm,STRAIG	
...3	CN906	3711-004946	CONNECTOR-HEADER;BOX,15P,1R,2.5MM,STRAIG	
...3	JA703	3722-001163	JACK-VHS;4P,12mm,AU,BLK,N	
...3	JA701	3722-001426	JACK-PIN;9P,3.4mm,NI,BLK,-	
...3	JA704	3722-001796	JACK-PIN;7P(10P),-,NI,RD/RD/WH/WH/RD/BL/	
...3	JA702	3722-001871	JACK-PIN;5P(9P),8.3MM,NI,GRN/BLU/RED/WHT	
...3	L802	AA27-10001C	COIL CHOKE;-,100uH,K,-,5.0A,ST,700UH-K(R	
...3	L801	AA29-00004A	FILTER LINE NOISE;-,20UH,3A,AC80-260V,TQ	
...3	TU02	AA40-00049A	TUNER;TCPN3081PC19C(S),TCPN3081PC19C(S),	
...3	TU04	AA40-00049A	TUNER;TCPN3081PC19C(S),TCPN3081PC19C(S),	
...3	TU01	AA59-00164A	MODULE-RF,SPLITTER;-,UMX-NT-005,-,2IN/3O	
...3		AA63-00396B	SHIELD CASE-TOP;PRJT,P54A,SPTE,T0.5,-,-,	S.N.A
...3		AA63-00397B	SHIELD CASE-BOT;PRJT,P54A,SPTE,T0.5,-,-,	S.N.A
...3		AA63-00610A	SHIELD CASE;COMMANDO,SPTE,T0.5,W141.5,H1	S.N.A
...3	T0104	AA95-02001K	ASSY SUB-PCB MICOM;,C2	
....4	T0083	0402-000274	DIODE-RECTIFIER;UF4004,400V,1A,DO-41,TP	
....4	Q409	0505-000109	FET-SILICON;2N7000,N,60V,200mA,5ohm,400m	
....4	Q409	0505-000109	FET-SILICON;2N7000,N,60V,200mA,5ohm,400m	
....4	IC904	1203-001943	IC-VOL. DETECTOR;7025,TO-92,3P,-,PLASTIC	
....4	X901	2801-004071	CRYSTAL-UNIT;6MHZ,30PPM,28-AAM,20PF,40OH	
....4	CN901	3703-001175	CONNECTOR-BACK PANEL;64P,2R,MALE,ANGLE,A	
....4		AA97-07275A	ASSY SMD;SVP-47W3HRT,P55A, , ,	S.N.A
.....5	D905	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....5	D906	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....5	D920	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....5	D923	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....5	D602	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....5	D901	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....5	D902	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....5	DZ016	0403-001375	DIODE-ZENER;RLZ3.6B,3.6-3.845V,500mW,LL-	
.....5	DZ016	0403-001375	DIODE-ZENER;RLZ3.6B,3.6-3.845V,500mW,LL-	
.....5	DZ016	0403-001375	DIODE-ZENER;RLZ3.6B,3.6-3.845V,500mW,LL-	
.....5	DZ016	0403-001375	DIODE-ZENER;RLZ3.6B,3.6-3.845V,500mW,LL-	
.....5	DZ016	0403-001375	DIODE-ZENER;RLZ3.6B,3.6-3.845V,500mW,LL-	
.....5	DZ016	0403-001375	DIODE-ZENER;RLZ3.6B,3.6-3.845V,500mW,LL-	
.....5	Q915	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5	Q916	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5	Q917	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5	Q920	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5	Q914	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5	Q913	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5	Q910	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5	Q908	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5	Q902	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5	IC112	1103-000180	IC-EEPROM;24C16,2Kx8Bit,SOP,8P,150MIL,10	
.....5	T0087	1203-002302	IC-POSI.FIXED REG.;78RM33D,D-PAK,3P,-,PL	
.....5	IC901	1204-001912	IC-DECODER;SDA5550M,P-MQFP,100P,-,PLASTI	
.....5	R981	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5	R964	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5	R960	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5	R959	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5	R965	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5	R956	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5	R953	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5	R952	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5	R969	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5	R970	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5	R972	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 R979	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R940	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R909	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R916	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R918	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R939	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R923	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R922	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R907	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R917	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R911	2007-000076	R-CHIP;330ohm,5%,1/10W,TP,1608	
.....5 R963	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
.....5 R901	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
.....5 R930	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R933	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R936	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R974	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R905	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R921	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R924	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R925	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R915	2007-000081	R-CHIP;2.7Kohm,5%,1/10W,TP,1608	
.....5 R913	2007-000081	R-CHIP;2.7Kohm,5%,1/10W,TP,1608	
.....5 R912	2007-000081	R-CHIP;2.7Kohm,5%,1/10W,TP,1608	
.....5 R978	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R976	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R971	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R958	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R980	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R982	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R985	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R986	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R903	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R904	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R906	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R908	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R955	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R954	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R928	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R927	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R983	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R934	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R987	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 R957	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 R944	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 R926	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	
.....5 R975	2007-000121	R-CHIP;820ohm,5%,1/10W,TP,1608	
.....5 R942	2007-000123	R-CHIP;1.5Kohm,5%,1/10W,TP,1608	
.....5 R941	2007-000123	R-CHIP;1.5Kohm,5%,1/10W,TP,1608	
.....5 R914	2007-000123	R-CHIP;1.5Kohm,5%,1/10W,TP,1608	
.....5 R988	2007-000290	R-CHIP;100ohm,5%,1/8W,TP,2012	
.....5 R962	2007-000583	R-CHIP;22Kohm,1%,1/10W,TP,1608	
.....5 R961	2007-000939	R-CHIP;47Kohm,1%,1/10W,TP,1608	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000221	C-CERAMIC,CHIP;100nF,20%,50V,Y5V,TP,3216	
.....5 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5 C120	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
.....5 C120	2203-000357	C-CERAMIC,CHIP;0.15NF,5%,50V,C0G,TP,1608	
.....5 C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5 C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5 C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5 C120	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,-	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 C120	2203-000748	C-CERAMIC,CHIP;0.03NF,5%,50V,C0G,TP,2012	
.....5 C120	2203-000748	C-CERAMIC,CHIP;0.03NF,5%,50V,C0G,TP,2012	
.....5 C120	2203-001048	C-CERAMIC,CHIP;0.56NF,10%,50V,C0G,TP,201	
.....5 C120	2203-005809	C-CERAMIC,CHIP;1000nF,10%,16V,X7R,TP,201	
.....5 C950	2402-000179	C-AL,SMD;47uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5 C936	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5 C921	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5 C918	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5 C915	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5 C913	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5 C938	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....5 C917	2402-001049	C-AL,CHIP;10uF,20%,16V,GP,TP,3.3x3.3x5.4	
.....5 C912	2402-001049	C-AL,CHIP;10uF,20%,16V,GP,TP,3.3x3.3x5.4	
.....5 C911	2402-001049	C-AL,CHIP;10uF,20%,16V,GP,TP,3.3x3.3x5.4	
.....5 L905	2703-001245	INDUCTOR-SMD;8.2uH,10%,2x1.25x1.25mm	
.....5 G101	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.....5 G101	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.....5 G101	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.....5 G101	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.....5 G101	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.....5 G101	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.....5 R949	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R950	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R951	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R945	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R946	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R948	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R966	2007-000931	R-CHIP;470ohm,5%,1/8W,TP,2012	
.....5 PCB	AA41-00599B	PCB-MICOM;HCM4215W,FR-4,2L,B,1.6T,180X24	S.N.A
.....5	0202-001167	SOLDER-CREAM;RX3603-2330HO,S45A,PASTE,SN	S.N.A
....4 IC902	1102-001130	IC-EPROM;M27W201-80F6,256KX8BIT,DIP,32P,	
....4	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3 IC801	AA96-00475C	ASSY H/S;SILICON-OIL,KA278R09,KA7808,AA6	S.N.A
....4	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4 T0087	1203-000293	IC-POSI.FIXED REG.;7808,TO-220,3P,-,PLAS	
....4 T0123	1203-002003	IC-VOLTAGE REGULATOR;278R09,TO-220,4P,-,	
....4 T0081	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
....4	AA62-00066B	HEAT SINK;D2,D3,AL ,T1.0,89,70,-,AA62-00	S.N.A
....4 T0123	1203-001978	IC-VOLTAGE REGULATOR;KA278RA05,TO-220F,4	
...3 IC601	AA96-00623E	ASSY H/S;SCREW,MAIN,AA62-00056A,TDA7265,	S.N.A
....4	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4 T0124	1201-001026	IC-POWER AMP;7265,ZIP,11P,19.6MIL,DUAL,1	
....4 T0081	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
....4	AA62-00056A	HEAT SINK-PS;-,-,T1.0,-,41*35*70,D2,-,-,	S.N.A
...3	BP63-00030A	SHIELD CASE;COMMANDO,SPTE,T0.5,W26.0,L13	S.N.A
...3 T0093	BP95-00146C	ASSY SUB PCB-CONV MOD;,P55A,CG MOD	
....4	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
....4 L01	2701-001030	INDUCTOR-AXIAL;43uH,10%,5x14mm	
....4 CN01	3703-001124	CONNECTOR-BACK PANEL;32P,2R,MALE,ANGLE,A	
....4 CN906	3711-003601	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,ANGLE,	
....4	BP97-00513D	ASSY SMD;,P55A,CG MOD	S.N.A
.....5 D13	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....5 D12	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....5 D11	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....5 D10	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....5 D14	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....5 D15	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....5 D16	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....5 D17	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....5 D18	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....5 D01	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....5 D02	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....5 D03	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....5 D04	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....5 D05	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....5 D09	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....5 D08	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....5 D07	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....5 D06	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....5 DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
.....5 DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
.....5 DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
.....5 Q02	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.....5 Q03	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.....5 Q10	0501-000342	TR-SMALL SIGNAL;KSC1623-Y,NPN,200mW,SOT-	
.....5 Q04	0501-000342	TR-SMALL SIGNAL;KSC1623-Y,NPN,200mW,SOT-	
.....5 Q409	0505-000110	FET-SILICON;2N7002,N,60V,115MA,7.5OHM,0.	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 Q409	0505-000110	FET-SILICON;2N7002,N,60V,115MA,7.5OHM,0.	
.....5 Q409	0505-000110	FET-SILICON;2N7002,N,60V,115MA,7.5OHM,0.	
.....5 IC104	0801-002345	IC-CMOS LOGIC;7S04,INVERTER,SOT-353,5P,4	
.....5 IC104	0801-002345	IC-CMOS LOGIC;7S04,INVERTER,SOT-353,5P,4	
.....5 IC104	0801-002345	IC-CMOS LOGIC;7S04,INVERTER,SOT-353,5P,4	
.....5 IC08	1001-000164	IC-ANALOG MULTIPLEX;74HC4052,CMOS,SOP,16	
.....5 IC13	1001-001155	IC-ANALOG MULTIPLEX;NC7SB3157P6X,CMOS,SC	
.....5 IC112	1103-001195	IC-EEPROM;24C64,8Kx8Bit,SOP,8P,150MIL,10	
.....5 DU410	1201-001135	IC-OP AMP;324,SOP,ST,14P,150MIL,QUAD,100	
.....5 DU410	1201-001504	IC-OP AMP;072,SOP,8P,150MIL,DUAL,-,PLAST	
.....5 DU410	1201-001504	IC-OP AMP;072,SOP,8P,150MIL,DUAL,-,PLAST	
.....5 DU410	1201-001504	IC-OP AMP;072,SOP,8P,150MIL,DUAL,-,PLAST	
.....5 DU410	1201-001504	IC-OP AMP;072,SOP,8P,150MIL,DUAL,-,PLAST	
.....5 T0074	1201-001520	IC-VIDEO AMP;EL2250CS,SOIC,8P,150MIL,DUA	
.....5 IC03	1203-001824	IC-VOL. DETECTOR;7042,SOT-89,3P,-,PLASTI	
.....5 T0087	1203-002302	IC-POSI.FIXED REG.;78RM33D,D-PAK,3P,-,PL	
.....5 IC17	1209-001163	IC-PLL;TLC2932IPWLE,SOP,14P,-,PLASTIC	
.....5 R36	2007-000028	R-CHIP;39ohm,5%,1/8W,TP,2012	
.....5 R35	2007-000028	R-CHIP;39ohm,5%,1/8W,TP,2012	
.....5 R31	2007-000028	R-CHIP;39ohm,5%,1/8W,TP,2012	
.....5 R30	2007-000028	R-CHIP;39ohm,5%,1/8W,TP,2012	
.....5 R143	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R144	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R25	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R122	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R123	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R141	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R136	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....5 R15	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....5 R24	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....5 R45	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....5 R46	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....5 R09	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....5 R10	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....5 R129	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....5 R134	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....5 R135	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....5 R59	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R65	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R71	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R77	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R91	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R53	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R02	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R16	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R17	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R20	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R47	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R62	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R64	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R68	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R58	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R56	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R52	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R70	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R98	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R94	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R82	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R80	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R76	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R74	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R38	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R37	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R110	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R11	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R101	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R03	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R39	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R50	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R44	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R43	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R42	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R41	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R40	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R128	2007-000079	R-CHIP;1.8Kohm,5%,1/10W,TP,1608	
.....5 R81	2007-000080	R-CHIP;2Kohm,5%,1/10W,TP,1608	
.....5 R75	2007-000080	R-CHIP;2Kohm,5%,1/10W,TP,1608	
.....5 R69	2007-000080	R-CHIP;2Kohm,5%,1/10W,TP,1608	
.....5 R51	2007-000080	R-CHIP;2Kohm,5%,1/10W,TP,1608	
.....5 R57	2007-000080	R-CHIP;2Kohm,5%,1/10W,TP,1608	
.....5 R63	2007-000080	R-CHIP;2Kohm,5%,1/10W,TP,1608	
.....5 R109	2007-000082	R-CHIP;3.3Kohm,5%,1/10W,TP,1608	
.....5 R66	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R61	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R60	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R55	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R54	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R79	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R78	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R73	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R72	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R67	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R49	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R08	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R07	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R06	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R04	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R01	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R48	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R133	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R121	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R119	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R118	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R86	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 R92	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 R93	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 R96	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 R97	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 R85	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 R113	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 R114	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 R115	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 R83	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 R84	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 R125	2007-000091	R-CHIP;12Kohm,5%,1/10W,TP,1608	
.....5 R05	2007-000102	R-CHIP;100Kohm,5%,1/10W,TP,1608	
.....5 R127	2007-000109	R-CHIP;1Mohm,5%,1/10W,TP,1608	
.....5 R100	2007-000118	R-CHIP;390ohm,5%,1/10W,TP,1608	
.....5 R32	2007-000119	R-CHIP;560ohm,5%,1/10W,TP,1608	
.....5 R34	2007-000122	R-CHIP;1.2Kohm,5%,1/10W,TP,1608	
.....5 R29	2007-000122	R-CHIP;1.2Kohm,5%,1/10W,TP,1608	
.....5 R28	2007-000122	R-CHIP;1.2Kohm,5%,1/10W,TP,1608	
.....5 R117	2007-000122	R-CHIP;1.2Kohm,5%,1/10W,TP,1608	
.....5 R107	2007-000122	R-CHIP;1.2Kohm,5%,1/10W,TP,1608	
.....5 R33	2007-000124	R-CHIP;2.2Kohm,5%,1/10W,TP,1608	
.....5 R120	2007-000124	R-CHIP;2.2Kohm,5%,1/10W,TP,1608	
.....5 R90	2007-000133	R-CHIP;330Kohm,5%,1/10W,TP,1608	
.....5 R89	2007-000133	R-CHIP;330Kohm,5%,1/10W,TP,1608	
.....5 R88	2007-000133	R-CHIP;330Kohm,5%,1/10W,TP,1608	
.....5 R87	2007-000133	R-CHIP;330Kohm,5%,1/10W,TP,1608	
.....5 R108	2007-000381	R-CHIP;13Kohm,5%,1/10W,TP,1608	
.....5 R139	2007-000402	R-CHIP;150ohm,5%,1/10W,TP,1608	
.....5 R138	2007-000402	R-CHIP;150ohm,5%,1/10W,TP,1608	
.....5 R137	2007-000402	R-CHIP;150ohm,5%,1/10W,TP,1608	
.....5 R99	2007-000704	R-CHIP;3.6Kohm,5%,1/16W,DA,TP,1608	
.....5 R95	2007-000704	R-CHIP;3.6Kohm,5%,1/16W,DA,TP,1608	
.....5 R126	2007-000857	R-CHIP;4.3Kohm,1%,1/16W,DA,TP,1608	
.....5 R27	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R26	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R116	2007-001179	R-CHIP;8.2Kohm,5%,1/10W,TP,1608	
.....5 RN04	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RN05	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RN06	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RN01	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RN02	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 RN03	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....5 C120	2203-000041	C-CERAMIC,CHIP;0.01NF,0.25PF,50V,C0G,TP,	
.....5 C120	2203-000041	C-CERAMIC,CHIP;0.01NF,0.25PF,50V,C0G,TP,	
.....5 C120	2203-000041	C-CERAMIC,CHIP;0.01NF,0.25PF,50V,C0G,TP,	
.....5 C120	2203-000041	C-CERAMIC,CHIP;0.01NF,0.25PF,50V,C0G,TP,	
.....5 C120	2203-000041	C-CERAMIC,CHIP;0.01NF,0.25PF,50V,C0G,TP,	
.....5 C120	2203-000041	C-CERAMIC,CHIP;0.01NF,0.25PF,50V,C0G,TP,	
.....5 C120	2203-000041	C-CERAMIC,CHIP;0.01NF,0.25PF,50V,C0G,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	

Loc. No.	Code No.	Description ; Specification	Remark
....4 C695	2301-000192	C-FILM,PEF;1nF,5%,50V,TP,5.3x10mm,5mm	
....4 C694	2301-000192	C-FILM,PEF;1nF,5%,50V,TP,5.3x10mm,5mm	
....4 C689	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4 C687	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4 C682	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
....4 C701	2401-000025	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
....4 C701	2401-000025	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
....4 C701	2401-000025	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
....4 C701	2401-000025	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
....4 C701	2401-000039	C-AL;1000uF,20%,16V,GP,TP,10x16,5	
....4 C701	2401-000039	C-AL;1000uF,20%,16V,GP,TP,10x16,5	
....4 C701	2401-000192	C-AL;1000uF,20%,50V,GP,TP,16x25,7.5	
....4 C701	2401-000192	C-AL;1000uF,20%,50V,GP,TP,16x25,7.5	
....4 C701	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
....4 C701	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
....4 C701	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
....4 C701	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
....4 C701	2401-000471	C-AL;10uF,20%,50V,BP,TP,5x11,5mm	
....4 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000603	C-AL;1UF,20%,50V,GP,TP,5X11,2	
....4 C701	2401-000603	C-AL;1UF,20%,50V,GP,TP,5X11,2	
....4 C701	2401-000603	C-AL;1UF,20%,50V,GP,TP,5X11,2	
....4 C701	2401-000603	C-AL;1UF,20%,50V,GP,TP,5X11,2	
....4 C701	2401-000603	C-AL;1UF,20%,50V,GP,TP,5X11,2	
....4 C701	2401-000832	C-AL;220uF,20%,25V,GP,TP,8x11.5,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-001192	C-AL;33uF,20%,50V,GP,TP,6.3x11,5	
....4 C701	2401-001397	C-AL;470uF,20%,25V,GP,TP,10x16,5	
....4 C701	2401-001513	C-AL;47uF,20%,16V,WT,TP,5x11,5	
....4 C701	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
....4 C701	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
....4 C701	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
....4 C701	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
....4 C701	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
....4 C701	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
....4 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
....4 C701	2401-002300	C-AL;47uF,20%,50V,GP,TP,6.3x11,5	
....4 C701	2401-002300	C-AL;47uF,20%,50V,GP,TP,6.3x11,5	
....4 C701	2401-002459	C-AL;220uF,20%,25V,LZ,TP,10x16,5	
....4 C701	2401-002459	C-AL;220uF,20%,25V,LZ,TP,10x16,5	
....4 C701	2401-002459	C-AL;220uF,20%,25V,LZ,TP,10x16,5	
....4 C701	2401-002459	C-AL;220uF,20%,25V,LZ,TP,10x16,5	
....4 C701	2401-002459	C-AL;220uF,20%,25V,LZ,TP,10x16,5	
....4 C701	2401-002459	C-AL;220uF,20%,25V,LZ,TP,10x16,5	
....4 C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
....4 C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	

Loc. No.	Code No.	Description ; Specification	Remark
....4 C701	2401-002594	C-AL;220uF,20%,16V,GP,TP,8x11.5,5	
....4 C701	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
....4 C701	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
....4 C701	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
....4 C701	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
....4 C701	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
....4 L105	2701-000106	INDUCTOR-AXIAL;1.5uH,10%,3x7mm	
....4 L119	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
....4 L120	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
....4 L121	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
....4 L122	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
....4 L123	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
....4 L124	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
....4 L107	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
....4 L108	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
....4 L111	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
....4 L114	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
....4 L113	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
....4 L112	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
....4 L703	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
....4 L106	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
....4 L104	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
....4 L103	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
....4 L101	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
....4 L706	2701-001030	INDUCTOR-AXIAL;43uH,10%,5x14mm	
....4 L705	2701-001030	INDUCTOR-AXIAL;43uH,10%,5x14mm	
....4 L102	2701-001040	INDUCTOR-AXIAL;10uH,10%,4.5x14mm	
....4 G101	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
....4 G101	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
....4 G101	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
....4 CN906	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
....4 CN906	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
....4 CN906	3711-002643	CONNECTOR-HEADER;BOX,4P,1R,2.5mm,STRAIGH	
....4 CN906	3711-002645	CONNECTOR-HEADER;BOX,6P,1R,2.5mm,STRAIGH	
....4 GT01	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT02	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT03	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4	BP97-00513Q	ASSY SMD;HCN4226WX/XAA,P55A	S.N.A
.....5 DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
.....5 DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
.....5 DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
.....5 DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
.....5 DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
.....5 DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
.....5 DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
.....5 DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
.....5 DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
.....5 DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
.....5 DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
.....5 DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
.....5 DZ016	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
.....5 DZ016	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
.....5 DZ016	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
.....5 Q703	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5 Q704	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5 Q707	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5 Q708	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5 Q709	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5 Q710	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5 Q101	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5 Q103	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5 Q106	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5 IC106	1001-001177	IC-VIDEO SWITCH;TEA6425D,VIDEO SWITCH ,S	
.....5 IC106	1001-001177	IC-VIDEO SWITCH;TEA6425D,VIDEO SWITCH ,S	
.....5 IC605	1001-001178	IC-AUDIO SWITCH;TEA6422D,AUDIO SWITCH ,S	
.....5 IC704	1002-001048	IC-A/D&D/A CONVERTER;PCF8591T,8BIT,SOP,1	
.....5 IC705	1002-001048	IC-A/D&D/A CONVERTER;PCF8591T,8BIT,SOP,1	
.....5 DU410	1201-000541	IC-OP AMP;062,SOP,8P,153MIL,DUAL,6V/mV,P	
.....5 IC602	1204-002002	IC-SOUND PROCESSOR;MSP3420G-B11,PQFP,80P	
.....5 R789	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R788	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R777	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R776	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R775	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R791	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R97C	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R904	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 R79B	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R795	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R794	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R729	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R145	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R143	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R117	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R101	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R712	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R708	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R706	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R148	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 R646	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R647	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R703	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R627	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R626	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R625	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R624	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R707	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R773	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R772	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R757	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R756	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R724	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R722	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R709	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R602	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R115	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R114	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R113	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R108	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R107	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R103	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R102	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R116	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R601	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R172	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R171	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R170	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R127	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R126	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R125	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 R730	2007-000076	R-CHIP;330ohm,5%,1/10W,TP,1608	
.....5 R166	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
.....5 R150	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
.....5 R157	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
.....5 R652	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R651	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R643	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R642	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R641	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R653	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R798	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R797	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R793	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R728	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R637	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R630	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R629	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R628	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R603	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R106	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R631	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R636	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R635	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R634	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R633	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R632	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....5 R755	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R771	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R774	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R780	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R604	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R611	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R688	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 R750	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 R749	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 R748	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 R747	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 R746	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 R744	2007-000093	R-CHIP;20Kohm,5%,1/10W,TP,1608	
.....5 R743	2007-000093	R-CHIP;20Kohm,5%,1/10W,TP,1608	
.....5 R741	2007-000093	R-CHIP;20Kohm,5%,1/10W,TP,1608	
.....5 R739	2007-000093	R-CHIP;20Kohm,5%,1/10W,TP,1608	
.....5 R164	2007-000094	R-CHIP;22Kohm,5%,1/10W,TP,1608	
.....5 R165	2007-000094	R-CHIP;22Kohm,5%,1/10W,TP,1608	
.....5 R149	2007-000094	R-CHIP;22Kohm,5%,1/10W,TP,1608	
.....5 R151	2007-000094	R-CHIP;22Kohm,5%,1/10W,TP,1608	
.....5 R155	2007-000094	R-CHIP;22Kohm,5%,1/10W,TP,1608	
.....5 R156	2007-000094	R-CHIP;22Kohm,5%,1/10W,TP,1608	
.....5 R716	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	
.....5 R704	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	
.....5 R110	2007-000098	R-CHIP;56Kohm,5%,1/10W,TP,1608	
.....5 R105	2007-000098	R-CHIP;56Kohm,5%,1/10W,TP,1608	
.....5 R762	2007-000127	R-CHIP;9.1Kohm,5%,1/10W,TP,1608	
.....5 R745	2007-000127	R-CHIP;9.1Kohm,5%,1/10W,TP,1608	
.....5 R742	2007-000127	R-CHIP;9.1Kohm,5%,1/10W,TP,1608	
.....5 R740	2007-000127	R-CHIP;9.1Kohm,5%,1/10W,TP,1608	
.....5 R738	2007-000127	R-CHIP;9.1Kohm,5%,1/10W,TP,1608	
.....5 R612	2007-000134	R-CHIP;33Kohm,5%,1/10W,TP,1608	
.....5 R607	2007-000134	R-CHIP;33Kohm,5%,1/10W,TP,1608	
.....5 R609	2007-000329	R-CHIP;11Kohm,5%,1/10W,TP,1608	
.....5 R608	2007-000329	R-CHIP;11Kohm,5%,1/10W,TP,1608	
.....5 R109	2007-000828	R-CHIP;39Kohm,1%,1/16W,DA,TP,1608	
.....5 R104	2007-000828	R-CHIP;39Kohm,1%,1/16W,DA,TP,1608	
.....5 R767	2007-001010	R-CHIP;51Kohm,5%,1/10W,TP,1608	
.....5 R754	2007-001010	R-CHIP;51Kohm,5%,1/10W,TP,1608	
.....5 R753	2007-001010	R-CHIP;51Kohm,5%,1/10W,TP,1608	
.....5 R752	2007-001010	R-CHIP;51Kohm,5%,1/10W,TP,1608	
.....5 R605	2007-001010	R-CHIP;51Kohm,5%,1/10W,TP,1608	
.....5 R610	2007-001010	R-CHIP;51Kohm,5%,1/10W,TP,1608	
.....5 R751	2007-001010	R-CHIP;51Kohm,5%,1/10W,TP,1608	
.....5 R713	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R710	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R702	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R701	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R174	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R173	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R714	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R799	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R792	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R731	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R727	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R726	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R725	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R133	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R132	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R121	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R120	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R119	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R118	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R134	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R142	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R140	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R138	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R137	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 R613	2007-001179	R-CHIP;8.2Kohm,5%,1/10W,TP,1608	
.....5 R606	2007-001179	R-CHIP;8.2Kohm,5%,1/10W,TP,1608	
.....5 C120	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
.....5 C120	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5 C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5 C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5 C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5 C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5 C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5 C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5 C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5 C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5 C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5 C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5 C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5 C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5 C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5 C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5 C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5 C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5 C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5 C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5 C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....5 C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.....5 C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.....5 C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.....5 C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.....5 C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.....5 C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.....5 C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.....5 C120	2203-000332	C-CERAMIC,CHIP;0.012NF,5%,50V,C0G,TP,160	
.....5 C120	2203-000332	C-CERAMIC,CHIP;0.012NF,5%,50V,C0G,TP,160	
.....5 C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5 C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5 C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5 C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....5 C120	2203-001071	C-CERAMIC,CHIP;0.056NF,5%,50V,C0G,TP,160	
.....5 C120	2203-001071	C-CERAMIC,CHIP;0.056NF,5%,50V,C0G,TP,160	
.....5 C120	2203-001071	C-CERAMIC,CHIP;0.056NF,5%,50V,C0G,TP,160	
.....5 C120	2203-001211	C-CERAMIC,CHIP;8.2nF,10%,50V,X7R,TP,1608	
.....5 C120	2203-001211	C-CERAMIC,CHIP;8.2nF,10%,50V,X7R,TP,1608	
.....5 C120	2203-001211	C-CERAMIC,CHIP;8.2nF,10%,50V,X7R,TP,1608	
.....5 C120	2203-001211	C-CERAMIC,CHIP;8.2nF,10%,50V,X7R,TP,1608	
.....5 C120	2203-001652	C-CERAMIC,CHIP;470nF,+80-20%,16V,Y5V,TP,	
.....5 C120	2203-001652	C-CERAMIC,CHIP;470nF,+80-20%,16V,Y5V,TP,	
.....5 C120	2203-001652	C-CERAMIC,CHIP;470nF,+80-20%,16V,Y5V,TP,	
.....5 C120	2203-001652	C-CERAMIC,CHIP;470nF,+80-20%,16V,Y5V,TP,	
.....5 C120	2203-001652	C-CERAMIC,CHIP;470nF,+80-20%,16V,Y5V,TP,	
.....5 C120	2203-001652	C-CERAMIC,CHIP;470nF,+80-20%,16V,Y5V,TP,	
.....5 C120	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
.....5 C120	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
.....5 C120	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
.....5 C120	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
.....5 C120	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
.....5 L701	2703-000398	INDUCTOR-SMD;10uH,10%,3.2x2.5x2.2mm	
.....5 L707	2703-000398	INDUCTOR-SMD;10uH,10%,3.2x2.5x2.2mm	
.....5 L708	2703-000398	INDUCTOR-SMD;10uH,10%,3.2x2.5x2.2mm	
.....5 L901	2703-000398	INDUCTOR-SMD;10uH,10%,3.2x2.5x2.2mm	
.....5 L902	2703-000398	INDUCTOR-SMD;10uH,10%,3.2x2.5x2.2mm	
.....5 L604	2703-000398	INDUCTOR-SMD;10uH,10%,3.2x2.5x2.2mm	
.....5 L125	2703-000398	INDUCTOR-SMD;10uH,10%,3.2x2.5x2.2mm	
.....5 L126	2703-000398	INDUCTOR-SMD;10uH,10%,3.2x2.5x2.2mm	
.....5 L601	2703-000398	INDUCTOR-SMD;10uH,10%,3.2x2.5x2.2mm	
.....5 L602	2703-000398	INDUCTOR-SMD;10uH,10%,3.2x2.5x2.2mm	
.....5 L603	2703-000398	INDUCTOR-SMD;10uH,10%,3.2x2.5x2.2mm	
.....5 G101	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.....5 PCB	AA41-00597F	PCB-MAIN;HCM4215W,FR-4,2L,F,1.6T,245X245	S.N.A

Loc. No.	Code No.	Description ; Specification	Remark
.....5	0202-001167	SOLDER-CREAM;RX3603-2330HO,S45A,PASTE,SN	S.N.A
...3 T0095	BP95-00142N	ASSY SUB PCB-PRO SCAN;HCN4727WX/XAA,P55A	
....4	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
....4 FC48	2305-000011	C-FILM,MPEF;470nF,5%,250V,TP,21.5X13.0X7	
....4 FC59	2305-000704	C-FILM,MPEF;100nF,5%,250V,TP,16.5x10.3x5	
....4 FC58	2309-000138	C-FILM,PE-PPF;100nF,5%,50V,TP,20x16x8.5,	
....4 EX01	2801-004019	CRYSTAL-UNIT;20.25MHz,30ppm,28-AAM,13pF,	
....4 T0122	2802-001177	RESONATOR-CERAMIC;2.696MHZ,0.4%,BK,10X4.	
....4 T0122	2802-001179	RESONATOR-CERAMIC;4MHZ,0.5%,BK,8X3X5.5MM	
....4 CN02	3703-001124	CONNECTOR-BACK PANEL;32P,2R,MALE,ANGLE,A	
....4 CN01	3703-001124	CONNECTOR-BACK PANEL;32P,2R,MALE,ANGLE,A	
....4 CN906	3711-001164	CONNECTOR-HEADER;BOX,9P,1R,2.5mm,ANGLE,-	
....4 CN906	3711-003601	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,ANGLE,	
....4	BP97-00169A	ASSY SMD;HCM4215WJX/XAA,P55A	S.N.A
.....5 FD13	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....5 FD14	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....5 FD15	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....5 FD16	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....5 FD17	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....5 FD10	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....5 FD01	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....5 FD02	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....5 FD07	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....5 FD08	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....5 FD09	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....5 DZ016	0403-000746	DIODE-ZENER;RLZ3.9B,3.89-4.16V,500MW,LL-	
.....5 DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
.....5 DZ016	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
.....5 DZ016	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
.....5 DZ016	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
.....5 DZ016	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
.....5 SQ01	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.....5 FQ13	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.....5 FQ04	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.....5 FQ03	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.....5 FQ02	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.....5 FQ08	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5 FQ09	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5 FQ12	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5 PQ01	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5 FQ06	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5 FQ05	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5 EQ15	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5 EQ14	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5 EQ13	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....5 FQ07	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
.....5 Q409	0505-000110	FET-SILICON;2N7002,N,60V,115MA,7.5OHM,0.	
.....5 Q409	0505-000110	FET-SILICON;2N7002,N,60V,115MA,7.5OHM,0.	
.....5 IC104	0801-000662	IC-CMOS LOGIC;74HC123,MULTIVIBATOR,SOP,1	
.....5 IC106	1001-001082	IC-VIDEO SWITCH;BA7657F,-,SOP,24P,300MIL	
.....5 IC06	1203-001211	IC-VOL. DETECTOR;7027,SOT-89,3P,-,PLASTI	
.....5 T0087	1203-002186	IC-POSI.FIXED REG.;18,DPAK,3P,240MIL,PLA	
.....5 T0087	1203-002302	IC-POSI.FIXED REG.;78RM33D,D-PAK,3P,-,PL	
.....5 IC02	1204-001814	IC-SELECTOR;CXA2151Q,QFP,48P,144MIL,PLAS	
.....5 IC01A	1204-001938	IC-DECODER;VSP9407B-B11,MQFP,80P,14X14MM	
.....5 IC118	1204-001989	IC-VIDEO PROCESS;CXA2165Q,QFP,64P,20X14M	
.....5 SR08	2007-000052	R-CHIP;10Kohm,1%,1/10W,TP,1608	
.....5 FR80	2007-000052	R-CHIP;10Kohm,1%,1/10W,TP,1608	
.....5 FR79	2007-000052	R-CHIP;10Kohm,1%,1/10W,TP,1608	
.....5 FR78	2007-000052	R-CHIP;10Kohm,1%,1/10W,TP,1608	
.....5 FR57	2007-000052	R-CHIP;10Kohm,1%,1/10W,TP,1608	
.....5 FR35	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 FR07	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 ER90	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 FR76	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 FR96	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 SR09	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 SR22	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 ER29	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 ER04	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 ER05	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 ER06	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 ER13	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 ER19	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 ER18	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 ER17	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....5 SR03	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 SR04	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 SR05	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 SR06	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 SR10	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 SR11	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 SR02	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 FR71	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 FR74	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 FR75	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 FR81	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 FR82	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 SR01	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 SR49	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 SR53	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 SR75	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 YR43	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 YR44	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 YR45	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 SR48	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 SR31	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 SR32	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 SR33	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 SR34	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 SR35	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 SR47	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 ER84	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 FR01	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 FR02	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 FR16	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 FR17	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 FR18	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 ER83	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 CR83	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 CR84	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 ER08	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 ER15	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 ER16	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 ER82	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 FR37	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 FR38	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 FR39	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 FR53	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 FR54	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 FR56	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 FR34	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 FR19	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 FR20	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 FR21	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 FR33	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 FR32	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 FR31	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....5 SR74	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
.....5 SR21	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
.....5 FR66	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
.....5 ER28	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
.....5 ER27	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
.....5 ER26	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
.....5 SR07	2007-000080	R-CHIP;2Kohm,5%,1/10W,TP,1608	
.....5 FR40	2007-000080	R-CHIP;2Kohm,5%,1/10W,TP,1608	
.....5 FR72	2007-000081	R-CHIP;2.7Kohm,5%,1/10W,TP,1608	
.....5 FR73	2007-000082	R-CHIP;3.3Kohm,5%,1/10W,TP,1608	
.....5 FR62	2007-000082	R-CHIP;3.3Kohm,5%,1/10W,TP,1608	
.....5 FR45	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 FR44	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 ER92	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 ER91	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....5 FR42	2007-000086	R-CHIP;5.6Kohm,5%,1/10W,TP,1608	
.....5 FR41	2007-000086	R-CHIP;5.6Kohm,5%,1/10W,TP,1608	
.....5 PR01	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 FR60	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 FR22	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 FR09	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....5 FR58	2007-000092	R-CHIP;15Kohm,5%,1/10W,TP,1608	
.....5 ER24	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	
.....5 ER25	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	
.....5 FR77	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	
.....5 PR02	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 ER20	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	
.....5 ER21	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	
.....5 ER22	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	
.....5 ER23	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	
.....5 FR63	2007-000118	R-CHIP;390ohm,5%,1/10W,TP,1608	
.....5 FR70	2007-000124	R-CHIP;2.2Kohm,5%,1/10W,TP,1608	
.....5 FR47	2007-000124	R-CHIP;2.2Kohm,5%,1/10W,TP,1608	
.....5 FR46	2007-000124	R-CHIP;2.2Kohm,5%,1/10W,TP,1608	
.....5 FR15	2007-000210	R-CHIP;1.1Kohm,5%,1/8W,TP,2012	
.....5 FR14	2007-000210	R-CHIP;1.1Kohm,5%,1/8W,TP,2012	
.....5 FR13	2007-000210	R-CHIP;1.1Kohm,5%,1/8W,TP,2012	
.....5 FR10	2007-000210	R-CHIP;1.1Kohm,5%,1/8W,TP,2012	
.....5 FR11	2007-000210	R-CHIP;1.1Kohm,5%,1/8W,TP,2012	
.....5 FR12	2007-000210	R-CHIP;1.1Kohm,5%,1/8W,TP,2012	
.....5 SR73	2007-000259	R-CHIP;1.6Kohm,5%,1/10W,TP,1608	
.....5 SR26	2007-000309	R-CHIP;10ohm,5%,1/10W,TP,1608	
.....5 SR25	2007-000309	R-CHIP;10ohm,5%,1/10W,TP,1608	
.....5 SR23	2007-000309	R-CHIP;10ohm,5%,1/10W,TP,1608	
.....5 FR36	2007-000691	R-CHIP;3.3Mohm,5%,1/16W,DA,TP,1608	
.....5 FR43	2007-000869	R-CHIP;4.7Kohm,1%,1/10W,TP,1608	
.....5 ER14	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 SR36	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 SR37	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 SR38	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 SR39	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 SR40	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 ER12	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 EC30	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 EC31	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 ER03	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 ER11	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 ER10	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 ER09	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,

Loc. No.	Code No.	Description ; Specification	Remark
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....5 C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5 C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....5 C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608

Loc. No.	Code No.	Description ; Specification	Remark
...3	RMY01	AA32-00012A MODULE REMOCON;ORC-50HF2,38KHZ,940NM,MES	
...3	T0076	AA39-00223C LEAD CONNECTOR-ASSY;P54A/SVP-42W5HD,UL10	
...3	CNW02	AA39-00259B LEAD CONNECTOR;SVP-43W6,UL1007#26,UL/CSA	
...3	T0076	AA39-20020D LEAD CONNECTOR-ASSY;,5P,600,67096-005,S,	
...3		BP97-00511H ASSY AUTO;HCN4226WX/XAA,P55A	S.N.A
....4	DZ016	0403-000510 DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
....4	DZ016	0403-000510 DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
....4	QY01	0504-000123 TR-DIGITAL;KSR1010,NPN,300mW,10K,TO-92,T	
....4	RY07	2001-000020 R-CARBON(S);22OHM,5%,1/2W,AA,TP,2.4X6.4M	
....4	RY09	2001-000109 R-CARBON(S);470OHM,5%,1/2W,AA,TP,2.4X6.4	
....4	R125	2001-000429 R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000832 R-CARBON;510OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000832 R-CARBON;510OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000832 R-CARBON;510OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000924 R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	RY08	2001-001108 R-CARBON(S);22KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4	C701	2401-002009 C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
....4	PCB	BP41-00023A PCB;SVP-43W8,PCB-CONTROL,1L,1.6T,330*245	S.N.A
..2	T0097	BP94-00515A ASSY PCB MISC-POWER-SW;HCN4226WX/XAA,P55	
...3	LEDY04	0601-001381 LED;ROUND,RED/GRN,5.0MM,650/563NM	
...3	LEDY03	0601-001381 LED;ROUND,RED/GRN,5.0MM,650/563NM	
...3	LEDY02	0601-001381 LED;ROUND,RED/GRN,5.0MM,650/563NM	
...3	LEDY01	0601-001381 LED;ROUND,RED/GRN,5.0MM,650/563NM	
...3	SWY02	3404-001006 SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3	CN906	3711-000479 CONNECTOR-HEADER;BOX,5P,1R,2.5mm,ANGLE,-	
...3	PCB	BP41-00022A PCB;SVP-43W8,PCB-MASTER-S/W,1L,1.6T,245*	S.N.A
..2	T0100	BP94-00527A ASSY PCB MISC-A/V FRONT;HCN4727WX/XAA,P5	
...3		0202-000187 SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3	SW101	3404-000208 SWITCH-TACT;12V,50mA,120gf,6x6mm,SPST	
...3	CN906	3711-000447 CONNECTOR-HEADER;BOX,3P,1R,2.5MM,ANGLE,-	
...3	CN906	3711-003601 CONNECTOR-HEADER;BOX,12P,1R,2.5mm,ANGLE,	
...3	JK101	3722-000544 JACK-VHS;4P,11.5mm,AG,BLK,N	
...3	JK102	3722-001164 JACK-PIN;3P,3.4mm,SN,WH:YE:RE,#16-22	
...3	T0081	6003-001023 SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
...3	T0076	AA39-00257C LEAD CONNECTOR-ASSY;P54A/SVP-42W5HD,UL25	
...3	T0076	AA39-00260A LEAD CONNECTOR-ASSY;,UL1007#26,UL/CSA,3P	
...3		AA63-10002A BAND-TIE;NYLON66 V2,L100,NTR	S.N.A
...3		AA97-07429A ASSY AUTO-A/V FRONT;HCM4215WX/XAA,P55A	S.N.A
....4	R125	2001-000006 R-CARBON;2.4KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	PCB	AA41-00499B PCB-FRONT A/V;SVP-54T6SR,FR-1,1L,A,1.6T,	S.N.A
...3	T0105	BP96-00007G ASSY COVER P-SIDE,JACK;42W5,ABS HB G3676	
....4		AA61-01128C HOLDER-SIDE AV;42W5,ABS HB,G3676,SV-704P	S.N.A
....4		AA64-02086S INLAY-AV;42W5,PS SHEET,T0.5,P55A,S/PG	S.N.A
....4	T0150	AA64-02780C DOOR-AV;42W5,ABS HB,G3676,SV-704P	
..2	T0096	BP95-00071A ASSY SUB-DVI;HCM4215WJX/XAA,P55A,DVI	
...3		0202-000187 SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3	Q409	0505-000109 FET-SILICON;2N7000,N,60V,200mA,5ohm,400m	
...3	Q409	0505-000109 FET-SILICON;2N7000,N,60V,200mA,5ohm,400m	
...3	DX701	2801-001385 CRYSTAL-UNIT;14.31818MHz,30ppm,28-AAA,16	
...3	DX301	2801-001385 CRYSTAL-UNIT;14.31818MHz,30ppm,28-AAA,16	
...3	CN906	3711-002643 CONNECTOR-HEADER;BOX,4P,1R,2.5mm,STRAIGH	
...3		BP97-00166A ASSY SMD;HCM4215WJX/XAA,DVI-AUTO,P55A	S.N.A
....4	DD512	0401-000133 DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4	DD511	0401-000133 DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4	DD510	0401-000133 DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4	DD509	0401-000133 DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4	DD513	0401-000133 DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4	DD514	0401-000133 DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4	DD515	0401-000133 DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4	DD516	0401-000133 DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4	DD501	0401-000133 DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4	DD502	0401-000133 DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4	DD503	0401-000133 DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4	DD504	0401-000133 DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4	DD508	0401-000133 DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4	DD507	0401-000133 DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4	DD506	0401-000133 DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4	DD505	0401-000133 DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4	DD901	0401-000160 DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
....4	DZ016	0403-001016 DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
....4	DZ016	0403-001016 DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
....4	DZ016	0403-001016 DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
....4	IC104	0801-002345 IC-CMOS LOGIC;7S04,INVERTER,SOT-353,5P,4	
....4	IC01	1002-001333 IC-A/D&D/A CONVERTER;GM7030,10BIT,PQFP,1	
....4	IC112	1103-000180 IC-EEPROM;24C16,2Kx8Bit,SOP,8P,150MIL,10	
....4	T0123	1203-001419 IC-VOLTAGE REGULATOR;4931,TO-252,3P,6.6x	
....4	IC05	1203-001824 IC-VOL. DETECTOR;7042,SOT-89,3P,-,PLASTI	

Loc. No.	Code No.	Description ; Specification	Remark
....4	T0123	1203-002351 IC-VOLTAGE REGULATOR;LF25C,DPAK,3P,240MI	
....4	DR514	2007-000071 R-CHIP;22ohm,5%,1/10W,TP,1608	
....4	DR515	2007-000071 R-CHIP;22ohm,5%,1/10W,TP,1608	
....4	DR516	2007-000071 R-CHIP;22ohm,5%,1/10W,TP,1608	
....4	DR517	2007-000071 R-CHIP;22ohm,5%,1/10W,TP,1608	
....4	DR501	2007-000071 R-CHIP;22ohm,5%,1/10W,TP,1608	
....4	DR502	2007-000071 R-CHIP;22ohm,5%,1/10W,TP,1608	
....4	DR504	2007-000071 R-CHIP;22ohm,5%,1/10W,TP,1608	
....4	DR506	2007-000071 R-CHIP;22ohm,5%,1/10W,TP,1608	
....4	DR513	2007-000072 R-CHIP;47ohm,5%,1/10W,TP,1608	
....4	DR512	2007-000072 R-CHIP;47ohm,5%,1/10W,TP,1608	
....4	DR510	2007-000072 R-CHIP;47ohm,5%,1/10W,TP,1608	
....4	DR109	2007-000078 R-CHIP;1Kohm,5%,1/10W,TP,1608	
....4	DR301	2007-000079 R-CHIP;1.8Kohm,5%,1/10W,TP,1608	
....4	DR901	2007-000084 R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
....4	DR519	2007-000084 R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
....4	DR518	2007-000084 R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
....4	DR511	2007-000084 R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
....4	DR508	2007-000084 R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
....4	DR701	2007-000090 R-CHIP;10Kohm,5%,1/10W,TP,1608	
....4	DR520	2007-000090 R-CHIP;10Kohm,5%,1/10W,TP,1608	
....4	DR509	2007-000090 R-CHIP;10Kohm,5%,1/10W,TP,1608	
....4	DR210	2007-000090 R-CHIP;10Kohm,5%,1/10W,TP,1608	
....4	DR702	2007-000090 R-CHIP;10Kohm,5%,1/10W,TP,1608	
....4	DR703	2007-000090 R-CHIP;10Kohm,5%,1/10W,TP,1608	
....4	DR704	2007-000090 R-CHIP;10Kohm,5%,1/10W,TP,1608	
....4	DR706	2007-000090 R-CHIP;10Kohm,5%,1/10W,TP,1608	
....4	DR707	2007-000090 R-CHIP;10Kohm,5%,1/10W,TP,1608	
....4	DR201	2007-000090 R-CHIP;10Kohm,5%,1/10W,TP,1608	
....4	DR202	2007-000090 R-CHIP;10Kohm,5%,1/10W,TP,1608	
....4	DR203	2007-000090 R-CHIP;10Kohm,5%,1/10W,TP,1608	
....4	DR204	2007-000090 R-CHIP;10Kohm,5%,1/10W,TP,1608	
....4	DR205	2007-000090 R-CHIP;10Kohm,5%,1/10W,TP,1608	
....4	DR209	2007-000090 R-CHIP;10Kohm,5%,1/10W,TP,1608	
....4	DR208	2007-000090 R-CHIP;10Kohm,5%,1/10W,TP,1608	
....4	DR207	2007-000090 R-CHIP;10Kohm,5%,1/10W,TP,1608	
....4	DR206	2007-000090 R-CHIP;10Kohm,5%,1/10W,TP,1608	
....4	DR902	2007-000102 R-CHIP;100Kohm,5%,1/10W,TP,1608	
....4	C120	2203-000041 C-CERAMIC,CHIP;0.01NF,0.25PF,50V,C0G,TP,	
....4	C120	2203-000041 C-CERAMIC,CHIP;0.01NF,0.25PF,50V,C0G,TP,	
....4	C120	2203-000041 C-CERAMIC,CHIP;0.01NF,0.25PF,50V,C0G,TP,	
....4	C120	2203-000041 C-CERAMIC,CHIP;0.01NF,0.25PF,50V,C0G,TP,	
....4	C120	2203-000181 C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4	C120	2203-000181 C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4	C120	2203-000181 C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4	C120	2203-000181 C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4	C120	2203-000181 C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4	C120	2203-000181 C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4	C120	2203-000181 C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4	C120	2203-000181 C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4	C120	2203-000181 C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4	C120	2203-000181 C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4	C120	2203-000181 C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4	C120	2203-000181 C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4	C120	2203-000181 C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4	C120	2203-000181 C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4	C120	2203-000181 C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4	C120	2203-000181 C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4	C120	2203-000181 C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4	C120	2203-000181 C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4	C120	2203-000181 C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4	C120	2203-000181 C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4	C120	2203-000181 C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4	C120	2203-000181 C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4	C120	2203-000181 C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4	C120	2203-000181 C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4	C120	2203-000181 C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4	C120	2203-000181 C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4	C120	2203-000181 C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4	C120	2203-000181 C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4	C120	2203-000181 C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4	C120	2203-000181 C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4	C120	2203-000181 C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4	C120	2203-000181 C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
....4	C120	2203-000236 C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
....4	C120	2203-000257 C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
....4	C120	2203-000257 C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
....4	C120	2203-000257 C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
....4	C120	2203-000257 C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
....4	C120	2203-000257 C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
....4 C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
....4 C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
....4 C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
....4 C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
....4 C120	2203-000626	C-CERAMIC,CHIP;0.022NF,5%,50V,C0G,TP,160	
....4 C120	2203-000626	C-CERAMIC,CHIP;0.022NF,5%,50V,C0G,TP,160	
....4 C120	2203-000626	C-CERAMIC,CHIP;0.022NF,5%,50V,C0G,TP,160	
....4 C120	2203-000998	C-CERAMIC,CHIP;0.047NF,5%,50V,C0G,TP,160	
....4 C120	2203-000998	C-CERAMIC,CHIP;0.047NF,5%,50V,C0G,TP,160	
....4 C120	2203-000998	C-CERAMIC,CHIP;0.047NF,5%,50V,C0G,TP,160	
....4 C120	2203-005437	C-CERAMIC,CHIP;10000nF,+80-20%,10V,Y5V,T	
....4 C120	2203-005437	C-CERAMIC,CHIP;10000nF,+80-20%,10V,Y5V,T	
....4 C120	2203-005437	C-CERAMIC,CHIP;10000nF,+80-20%,10V,Y5V,T	
....4 C120	2203-005437	C-CERAMIC,CHIP;10000nF,+80-20%,10V,Y5V,T	
....4 C120	2203-005437	C-CERAMIC,CHIP;10000nF,+80-20%,10V,Y5V,T	
....4 C120	2203-005437	C-CERAMIC,CHIP;10000nF,+80-20%,10V,Y5V,T	
....4 DC420	2402-000165	C-AL,SMD;47uF,20%,6.3V,GP,TP,5.3x5.3x5.	
....4 DC417	2402-000165	C-AL,SMD;47uF,20%,6.3V,GP,TP,5.3x5.3x5.	
....4 DC413	2402-000165	C-AL,SMD;47uF,20%,6.3V,GP,TP,5.3x5.3x5.	
....4 DC410	2402-000165	C-AL,SMD;47uF,20%,6.3V,GP,TP,5.3x5.3x5.	
....4 DC407	2402-000165	C-AL,SMD;47uF,20%,6.3V,GP,TP,5.3x5.3x5.	
....4 DC406	2402-000165	C-AL,SMD;47uF,20%,6.3V,GP,TP,5.3x5.3x5.	
....4 DC404	2402-000165	C-AL,SMD;47uF,20%,6.3V,GP,TP,5.3x5.3x5.	
....4 DC402	2402-001129	C-AL,SMD;47UF,20%,16V,WT,TP,6.3X5.2MM	
....4 DC706	2402-001155	C-AL,SMD;47UF,20%,16V,WT,TP,6.3X5.2MM	
....4 DC701	2404-001020	C-TA,CHIP;10uF,20%,10V,GP,TP,3216,3.2	
....4 DL701	2703-000398	INDUCTOR-SMD;10uH,10%,3.2x2.5x2.2mm	
....4 DL409	2703-000398	INDUCTOR-SMD;10uH,10%,3.2x2.5x2.2mm	
....4 DL408	2703-000398	INDUCTOR-SMD;10uH,10%,3.2x2.5x2.2mm	
....4 DL406	2703-000398	INDUCTOR-SMD;10uH,10%,3.2x2.5x2.2mm	
....4 DL404	2703-000398	INDUCTOR-SMD;10uH,10%,3.2x2.5x2.2mm	
....4 DL401	2703-000398	INDUCTOR-SMD;10uH,10%,3.2x2.5x2.2mm	
....4 G101	3301-001202	CORE-FERRITE BEAD;AB,120ohm,4.5x3.2x1.3m	
....4 T0119	BP09-00004A	IC MICOM;T89C51IC2-SLSCM,44,5V,32KBYTE,P	
....4 CR501	2402-000108	C-AL,SMD;10uF,20%,16V,WT,TP,4.3x4.3x5.4	
....4 G101	3301-001593	CORE-FERRITE BEAD;AB,200OHM,2.0X1.2X1.3M	
....4 G101	3301-001593	CORE-FERRITE BEAD;AB,200OHM,2.0X1.2X1.3M	
....4 G101	3301-001593	CORE-FERRITE BEAD;AB,200OHM,2.0X1.2X1.3M	
....4 G101	3301-001593	CORE-FERRITE BEAD;AB,200OHM,2.0X1.2X1.3M	
....4 DR705	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
....4 DR708	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
....4 DR503	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
....4 DR505	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
....4 DR507	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
....4 DR521	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
....4 DR522	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
....4 0	AA41-00793B	PCB;HCN473,PCB-DVI,2L,1.6T,245*180,P55A,	S.N.A
....4	0202-001167	SOLDER-CREAM;RX3603-2330HO,S45A,PASTE,SN	S.N.A
...3 CN906	3711-003641	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,STRAIG	
...3 T0121	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
...3	AA63-10002A	BAND-TIE;NYLON66 V2,L100,NTR	S.N.A
...3 IC112	1103-001211	IC-EEPROM;24C16-PC27 C,2048x8Bit,DIP,8P,	
...3 T0076	AA39-20032B	LEAD CONNECTOR-ASSY;,12P,300,67096-012,S	
...3 PL1	3701-001173	CONNECTOR-DSUB;24P,3R,FEMALE,ANGLE,AUF	

ASSY FIXING

1		BP91-00833Q	ASSY FIXING;HCN436WX/XAA,P55A	S.N.A
..2	T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
..2	T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
..2	T0076	AA39-20010B	LEAD CONNECTOR-ASSY;,1P,500,YFH800-01,S,	
..2	T0076	AA39-20010B	LEAD CONNECTOR-ASSY;,1P,500,YFH800-01,S,	
..2	T0070	AA61-01127A	HOLDER-CHASSIS;COMMANDO,HIPS V0,G4309	S.N.A
..2		AA63-10002A	BAND-TIE;NYLON66 V2,L100,NTR	S.N.A
..2		AA65-30018A	CLAMPER CORE-WIRE;DONG-A,NYLON-66,-,-,-	S.N.A
..2		AA65-30111A	CLAMPER CORE-WIRE;ALL MODEL,NYLON,V0,-,W	S.N.A
⚠ ..2	T0066	AA96-00156A	ASSY POWER CORD;-,EP2/YES(US),H/C100MM,K	
...3		3811-000401	WIRE-PVC CU;BCWA,300V,ROLL,17/0.16mm,#22	S.N.A
...3	T0077	AA39-10007Y	CBF POWER CORD;-,EP2/YES,SPT-2 18AWGx2C,	
...3		AA61-20284A	HOLDER;P-CORD,PP,-,-,-,BLK,VO,KE-002	S.N.A
...3		AA63-10002B	BAND-TIE;NYLON66 V2,L140,NTR	S.N.A
...3	T0121	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
..2		BP39-00047A	LEAD CONNECTOR;P55A/HCM4215W,UL2547#26,U	

ASSY ACCESSORY

1	M0016	BP92-00512C	ASSY ACCESSORY;HCN553WX/XAA,P55A,DVI	S.N.A
..2		6902-000018	BAG PE;LDPE,T0.1,W280,L400,GRY,8,2-	S.N.A
..2	T0116	AA39-00006A	CABLE RCA;,3000MM	
..2	T0074	AA59-00262A	REMOCON;,TM63,COMMONDO,48,G6671B,EX,S/S	
...3	T0122	2802-000194	RESONATOR-CERAMIC;8MHz,1.0%,TP,8.5x4.5x5	
...3	T0119	AA09-00275A	IC MICOM;Z86L8808SSC-R51PX,SOP,ST,SZTM-8	
..2	T0113	AA61-20126A	HOLDER-LEG;-,ABS,-,-,-,BLK,HB	
..2		AA68-00371C	CARD WARRANTY-01;,SEA,W/P100(G),1 YEAR	S.N.A
..2		AA68-40065B	CARD-REGISTRATION;,SEA,A5,ENG,A/P220,2P(	S.N.A
..2		AA69-30009C	BAG-SHEET;LDPE,T0.08,W150,L120,-,-,-	S.N.A
..2	CIS	BP68-00054A	MANUAL USERS;HCM473WJX,ENG,W/P100G,P55A,	

ASSY P/MATERIAL

1		BP92-00542A	ASSY P/MATERIAL;,P55A	S.N.A
..2		AA60-40006A	PIN-STAPLE;AUTO,33X17.8X2.4,H18,33X17.8X	S.N.A
..2		AA61-20285A	HOLDER-BOX;3456,PP,-,-,-,WHT,VO	S.N.A
..2		AA63-10007C	BAND-PP;W18,CLEA,1G	S.N.A
..2		AA69-00305A	BAG AIR;ALL,LDPE,1000,500,CLR,	S.N.A
..2		AA69-00744L	BAG-SHEET;-,HDPE PE FOAM,T0.015,W1650,H1	S.N.A

You can search for the updated part code through ITSELF web site.
URL : http://itself.sec.samsung.co.kr

7-2 HCN4226W3S/XAA

Loc. No.		Code No.	Description ; Specification	Remark
			ASSY SKD PART	
1		AA92-07170A	ASSY SKD PART;HCN653WSC/XAA,P55A	S.N.A
..2	T0118	AA26-00101A	TRANS FBT-H/V DISTRIBUTOR;FWZ50A001E/FFA	
..2		AA63-10002A	BAND-TIE;NYLON66 V2,L100,NTR	S.N.A
..2		AA65-30018A	CLAMPER CORE-WIRE;DONG-A,NYLON-66,-,-,-	S.N.A
..2		AA65-30104C	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,	S.N.A
⚠ ..2	T0066	AA96-00156A	ASSY POWER CORD;-,EP2/YES(US),H/C100MM,K	
...3		3811-000401	WIRE-PVC CU;BCWA,300V,ROLL,17/0.16mm,#22	S.N.A
...3	T0077	AA39-10007Y	CBF POWER CORD;-,EP2/YES,SPT-2 18AWGx2C,	
...3		AA61-20284A	HOLDER;P-CORD,PP,-,-,-,BLK,VO,KE-002	S.N.A
...3		AA63-10002B	BAND-TIE;NYLON66 V2,L140,NTR	S.N.A
...3	T0121	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
			ASSY K/D-SKD P/MATERIAL	
1		AA98-01629A	ASSY K/D-SKD P/MATERIAL;SKD FORMAT-3	S.N.A
..2		AA69-00305A	BAG AIR;ALL,LDPE,1000,500,CLR,	S.N.A
..2		AA69-00306A	BAG AIR;LDPE,-,1800,1000,CLR,ASSY,ALL,-	S.N.A
..2		AA69-90001A	CHEMICALS-SILICAGEL;-,-,-,-,-,M2,5GR,-,-	S.N.A
..2		AA60-40006A	PIN-STAPLE;AUTO,33X17.8X2.4,H18,33X17.8X	S.N.A
..2	WOODEN	AA63-10007C	BAND-PP;W18,CLEA,1G	S.N.A
			ASSY COVER FRONT	
1	M0001	BP90-00152B	ASSY COVER FRONT;HCN4226W3S/XAA,P55A	S.N.A
..2	T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
..2	T0081	6003-001339	SCREW-TAPTITE;HH,+,B,M4,L15,ZPC(BLK),SWR	S.N.A
..2	HC+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	S.N.A
..2	HC+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	S.N.A
..2	HC+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	S.N.A
..2	BCM+WO	6006-001094	SCREW-ASS'Y WOOD;WW,HH,+,M7,L32,ZPC(YEL)	S.N.A
..2	T0118	AA26-00101A	TRANS FBT-H/V DISTRIBUTOR;FWZ50A001E/FFA	
..2		AA60-00072B	SPACER-COVER,DUST;43,54,62J9,SPONGE 94HF	S.N.A
..2	T0069	AA60-00091J	SPACER-FELT;-,FELT,330X10,-,-,BLK,T0.5,-	S.N.A
..2	T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
..2	T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
..2	T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
..2	T0115	AA61-00475B	BRACKET-CRT,MAIN;54,SECC,T1.6,-,-,-,-	
..2		AA61-00618C	GUIDE-FLOW;54J8,J7,ABS,IVORY,V0	S.N.A
..2		AA63-10002A	BAND-TIE;NYLON66 V2,L100,NTR	S.N.A
..2		AA65-00020A	CLAMPER CORE-WIRE;55W9,NYLON 66	S.N.A
..2	T0056	AA67-00193A	SCREEN-TINT;42W,958*550,T=0.7,P	
..2	T0053	AA67-00193B	SCREEN FRESNEL;42W,960*552,T=2.0	
..2	T0052	AA67-00207A	SCREEN-FILTER;,T=82%,9,G=110,AG	
..2		BH73-60304C	RUBBER-SUPPORT;DP15LT,CR V0,GRAY,-,14*7*	S.N.A
..2	T0076	BP39-00009A	LEAD CONNECTOR-ASSY;P54A/SVP-42W5,UL2547	
..2	T0254	BP61-00010A	BRACKET-SCREEN,TB;DP,42W5,AA61-01121A,26	S.N.A
...3	T0254	AA61-01121A	BRACKET-SCREEN,TB;42W5,SECC,T1.0	S.N.A
..2	T0056	BP61-00011A	BRACKET-SCREEN,RL;DP,42W5,AA61-01122A,13	S.N.A
...3	T0056	AA61-01122A	BRACKET-SCREEN,RL;42W5,SECC,T1.0	
..2		BP61-00043B	HOLDER-SENSOR;W9,PC HB,VIOLET	S.N.A
..2		BP61-00052A	HOLDER-WIRE;PJTV,NYLON,66,NATURAL	S.N.A
..2		BP64-00029A	INLAY-SUPPORT;42W5,PS SHEET,T0.5,94V0	S.N.A
..2	T0102	BP73-00004A	RUBBER-CAP;42W5,SILICONE,WHT,RUBBER	
..2		BP98-00189A	ASSY K/D-FRONT MASK;42W8	S.N.A
...3	T0081	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
...3		AA61-01133A	VELCRO-B;COMMANDO,BST1 1/4H	S.N.A
...3	T0017	AA64-02727R	CABINET-FRONT MASK;42W8,HIPS,HB,GRY,SV01	
...3	T0057	BP64-00199A	BADGE-BRAND;PJLCD,AL,T1.5,72,12.5,,DGN-S	S.N.A
...3	T0102	BP73-00004A	RUBBER-CAP;42W5,SILICONE,WHT,RUBBER	
..2		BP98-00190A	ASSY K/D-FRONT BOT;42W8	S.N.A
...3	T0081	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
...3	T0081	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
...3		AA61-01132A	VELCRO-A;COMMANDO,BST1 1/4H	S.N.A
...3		AA61-20129A	HOLDER-WIRE;-,NYLON-66,-,-,-,NTR,DAFC-25	S.N.A
...3	CIS7	AA61-60003A	SPRING ETC-CS;-,SUS304,-,-,OD7,N7,OD7,-,	S.N.A
...3		BP61-00272A	HOLDER-PCB POWER;42W8,ABS,SMOG,6G	S.N.A
...3		BP61-00273A	HOLDER-RING;42W8,ABS,GRAY,AL	S.N.A
...3		BP64-00230A	CABINET FRONT-BOT;42W8,HIPS V0,GRAY,SV70	S.N.A
...3	T0023	BP64-00231A	KNOB POWER;42W8,ABS,HB,GRAY,AL	S.N.A
...3		BP64-00232A	WINDOW-RMC;42W8,ABS,HB,CLEAR	S.N.A
...3	T0022	BP64-00233A	KNOB CONTROL;42W8,ABS,HB,GRAY,SVM1132	S.N.A
..2		BP98-00191A	ASSY K/D-WOOD;42W8,WOOD	S.N.A
...3	T0082	3001-001107	SPEAKER;20W,8OHM,95DB,1300HZ	
...3	T0082	3001-001353	SPEAKER;25W,8OHM,90DB+/-3DB,60HZ+/-12HZ	
...3	T0076	AA39-00086A	LEAD CONNECTOR-ASSY;,2.2UF,200MM,REC,REC	
...3	HC+CW	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,-,-,ZP	S.N.A
...3		AA61-00094C	HOLDER-RAIL;PCJ533R,ABS,-,-,-,BLK,HB,480	S.N.A
...3		AA61-00097A	HOLDER-WIRE;-,NYLON 6/6,-,-,-,NTR,-	S.N.A
...3		AA61-00508D	HOLDER-JERSEY;W3,ABS V0,GRAY,G4309	S.N.A
...3		AA61-00533B	BRACKET-GRILLE;43,54,62J8,SECC-1 ,T0.5,-	S.N.A
...3		AA61-00616B	HOLDER-CRT,MAIN;54J7,DP,-,-,-,-,AA61-005	S.N.A
....4		AA61-00506B	HOLDER-CRT,MAIN;43,54,62J8,HIPS,-,-,-,BL	S.N.A
...3		AA64-02724A	CABINET-WOOD;42W5,WOOD,SDE8336R	S.N.A
...3		AA98-00049A	ASSY-LEAD,CON;-,LEAD-CON,CORE,AA39-20505	S.N.A
....4	T0121	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
...3		BP61-00019A	HOLDER-PALLET;42W5,HIPS HB,BLK	S.N.A
...3		BP61-00035A	BRACKET-GRILLE;42W5,SECC-1,T1.0	S.N.A
			ASSY COVER REAR	
1	M0002	BP90-00155B	ASSY COVER REAR;HCN4226W3S/XAA,P55A	S.N.A
..2	T0081	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	S.N.A
..2	T0081	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	S.N.A
..2	T0081	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	S.N.A
..2	T0081	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	S.N.A
..2	T0081	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	S.N.A
..2	HC+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18	S.N.A
..2	HC+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	S.N.A
..2	T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
..2	T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
..2	T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
..2	T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
..2	T0112	AA64-02728A	CABINET-BACK,TOP;42W5,HIPS,HB,G4309	
..2	T0112	AA64-02729B	CABINET-BACK,BOT;42W5,HIPS,V0,G4309	
..2		AA64-60421C	INLAY-COVER;-,PS,T0.3,-,-,BLK,SEA	S.N.A
..2		AA64-60449B	INLAY-COVER;SP-434JMF,PS,T0.5,149.3X69.5	S.N.A
..2		AA65-30008A	CLAMPER CORE-CORD;-,PE,HB,-,BLK,-	S.N.A
..2		AA67-00204A	MIRROR-FRONT;42W5,FSM,870*633*446	
..2		BP61-00012A	BRACKET-MIRROR;DP,42W5,AA61-01123A,11.8K	S.N.A
...3		AA61-01123A	BRACKET-MIRROR;42W5,SECC,T1.0	S.N.A
...3		BP60-00005A	SPACER-SPONGE;42W5,RUBBER-SPONGE,T3	S.N.A
..2	T0092	BP96-00077L	ASSY COVER P-TERMINAL,ANT;DP WIDE PJT,HI	
...3	T0092	BP96-00038H	ASSY COVER P-TERMINAL,ANT;WIDE PJT,HIPS	
....4		AA64-02836J	INLAY-TERMINAL,NT;WIDE PJT,PS SHEET,T0.5	S.N.A
....4		AA65-00023A	TERMINAL-BOARD,ANT;,HIPS V0,BLK	S.N.A
			ASSY CHASSIS	
1	M0017	BP91-00935A	ASSY CHASSIS;HCN4226WS,P55A,KAWA	S.N.A
..2		BP91-00801Y	ASSY MISC-CHASSIS PACK;HCN4226W,P55A,KAW	S.N.A
...3	T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
...3	T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
...3	T0070	AA61-01127A	HOLDER-CHASSIS;COMMANDO,HIPS V0,G4309	S.N.A
...3	T0097	AA94-08574A	ASSY PCB MISC-PWR-DEF; ,HCM4215W,P55A	

Loc. No.	Code No.	Description ; Specification	Remark
....4	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
....4 T0083	0402-000236	DIODE-RECTIFIER;GI824,400V,5A,-,TP	
....4 T0083	0402-000250	DIODE-RECTIFIER;RG4C,1000V,1A,-	
⚠ 4 NT801S	1404-001195	THERMISTOR-NTC;5.1ohm,15%,2900,27mW/C,BK	
⚠ 4 CX802S	2306-000112	C-FILM,MPPF;100nF,20%,250V,BK,-,15mm	
⚠ 4 CX801S	2306-000112	C-FILM,MPPF;100nF,20%,250V,BK,-,15mm	
....4 C701	2401-000701	C-AL;2200uF,20%,250V,GP,-,35x70mm,1	
....4 C701	2401-000701	C-AL;2200uF,20%,250V,GP,-,35x70mm,1	
....4 C701	2401-002251	C-AL;470uF,20%,200V,GP,BK,25x40mm,1	
....4 C701	2401-003076	C-AL;3300UF,20%,50V,WT,BK,18X35.5MM,7.5	
....4 C701	2401-003076	C-AL;3300UF,20%,50V,WT,BK,18X35.5MM,7.5	
....4 C701	2401-003076	C-AL;3300UF,20%,50V,WT,BK,18X35.5MM,7.5	
⚠ 4 FP801S	3601-000300	FUSE-CARTRIDGE;250V,6.3A,SLOW-BLOW,GLASS	
⚠ 4 T481	AA26-00091A	TRANS-HV-STORAGE;4mH,-,14P,830uH,180V,10	
⚠ 4 T444S	AA26-00100A	TRANS FBT;FFA97513L,CT29A7DR,0.3mH,-,-,-	
⚠ 4 T431	AA26-50001U	TRANS-HORIZ.DRIVE;-,-,-,28mH,-,-,105uH,-	
⚠ 4 T461	AA26-50001V	TRANS-HORIZ.DRIVE;-,-,-,6.0mH,-,-,113uH,	
⚠ 4 LR401S	AA27-30003M	COIL LINEARITY;-,5uH,OWA14x15,USRC0.1x60	
....4 T0076	AA39-00180A	LEAD CONNECTOR-ASSY;,14P,100MM,YBNH250-1	
....4 D856	AA96-00243E	ASSY H/S;-,SOUND,AA62-00045A,FMG-G26S	S.N.A
....4 D855	AA96-00243E	ASSY H/S;-,SOUND,AA62-00045A,FMG-G26S	S.N.A
.....5	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
.....5 T0083	0402-000231	DIODE-RECTIFIER;FMG-G26S,600V,4A,TO-220F	
.....5 T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
.....5	AA62-00045A	HEAT SINK-PS;-,-,T1.0,-,-,DREAM,-,-,-,-,	S.N.A
....4 Q433	AA96-00243H	ASSY H/S;-,POWER,AA62-00045A,KSD73Y,C17A	S.N.A
.....5	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
.....5 T0090	0502-000298	TR-POWER;KSD73,NPN,30000mW,TO-220,TP,120	
.....5 T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
.....5	AA62-00045A	HEAT SINK-PS;-,-,T1.0,-,-,DREAM,-,-,-,-,	S.N.A
⚠ 4 IC831S	AA96-00275J	ASSY H/S;SCREW,SILICON-OIL,AA62-00051A,S	S.N.A
.....5 CIS	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
.....5 T0081	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
.....5 IC063	AA13-00105A	IC HYBRID;STR-X6456,7,-20TO+125,DIP,21A,	
.....5 CIS	AA62-00051A	HEAT SINK-PS;-,-,-,SILVER,HOLE 31mm,ALL,	S.N.A
⚠ 4 D811S	AA96-00276A	ASSY H/S;-,BRIDGE,AA62-00052A,RBV606,WAS	S.N.A
.....5	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
.....5 T0083	0402-000549	DIODE-BRIDGE;RBV606,600V,6A,-,BK	
.....5 T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
.....5	AA60-30003A	WASHER;T1.5,SBHG-1	S.N.A
.....5	AA62-00052A	HEAT SINK-PS;-,-,-,SILVER,HOLE 18.5mm, 2	S.N.A
....4 IC301	AA96-00623A	ASSY H/S;-,POWER,AA62-00056A,LA7845	S.N.A
.....5	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
.....5 T0088	1204-000517	IC-VERTICAL DEF.;LA7845,SIP,7P,-,PLASTIC	
.....5 T0081	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
.....5	AA62-00056A	HEAT SINK-PS;-,-,T1.0,-,41*35*70,D2,-,-,	S.N.A
....4	AA97-07506Z	ASSY AUTO-PWR DEF;HCM4215W	S.N.A
.....5 D478	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.....5 D479	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
⚠ 5 DR401S	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
⚠ 5 DR402S	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.....5 D385	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.....5 D436	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.....5 D442	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.....5 D443	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.....5 D477	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.....5 D301	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.....5 DS802	0401-000006	DIODE-SWITCHING;BAV21,250V,250mA,DO-35,T	
.....5 DS804	0401-000006	DIODE-SWITCHING;BAV21,250V,250mA,DO-35,T	
.....5 T0083	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
.....5 T0083	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
.....5 T0083	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
.....5 T0083	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
.....5 T0083	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
.....5 T0083	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
.....5 T0083	0402-000254	DIODE-RECTIFIER;RGP10J,600V,1A,DO-41,TP	
.....5 T0083	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
.....5 T0083	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
.....5 T0083	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
.....5 T0083	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
.....5 T0083	0402-000537	DIODE-RECTIFIER;RH1A,600V,0.6A,DO-204AC	
.....5 T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
.....5 T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
.....5 T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
.....5 T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
.....5 T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
.....5 DZ016	0403-000704	DIODE-ZENER;TZP7.5B,7.5V,7.5-8.4V,1W,DO-	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 DZ016	0403-000716	DIODE-ZENER;MTZJ4.7B,4.7V,4.55-4.8V,500m	
.....5 DZ016	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
.....5 DZ016	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
.....5 DZ016	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
.....5 DZ016	0403-000734	DIODE-ZENER;TZP15B,15V,14.7-16.5V,1W,DO-	
.....5 DZ016	0403-001167	DIODE-ZENER;MTZJ30D,30V,29.02-30.51V,500	
.....5 DZ016	0403-001316	DIODE-ZENER;MTZJ3.0A,2.85-3.07V,500mW,DO	
.....5 DZ016	0403-001319	DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	
.....5 DZ016	0403-001319	DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	
.....5 DZ016	0403-001325	DIODE-ZENER;MTZJ15C,14.35-15.09V,500mW,D	
.....5 DZ016	0403-001325	DIODE-ZENER;MTZJ15C,14.35-15.09V,500mW,D	
.....5 DZ016	0403-001325	DIODE-ZENER;MTZJ15C,14.35-15.09V,500mW,D	
.....5 DZ016	0403-001327	DIODE-ZENER;MTZJ18A,16.22-17.06V,500mW,D	
.....5 DZ016	0403-001327	DIODE-ZENER;MTZJ18A,16.22-17.06V,500mW,D	
.....5 DZ016	0403-001327	DIODE-ZENER;MTZJ18A,16.22-17.06V,500mW,D	
.....5 DZ016	0403-001328	DIODE-ZENER;MTZJ22A,20.15-21.20V,500mW,D	
.....5 DZ016	0403-001329	DIODE-ZENER;MTZJ24B,22.61-23.77V,500mW,D	
.....5 DZ016	0403-001329	DIODE-ZENER;MTZJ24B,22.61-23.77V,500mW,D	
.....5 DZ016	0403-001330	DIODE-ZENER;MTZJ30A,26.99-28.39V,500mW,D	
.....5 DZ016	0403-001330	DIODE-ZENER;MTZJ30A,26.99-28.39V,500mW,D	
.....5 DS805	0404-001056	DIODE-SCHOTTKY;RK16,60V,1.5A,DO-204AC,TP	
⚠ 5 QR401S	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
.....5 Q482	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
.....5 Q432	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
.....5 Q461	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q471	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q474	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q481	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q851	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 QS801	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 QS802	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q301	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q381	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q382	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q401	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q402	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q421	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q451	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 IC012	1203-001217	IC-POSI.ADJUST REG.;431,TO-92,3P,4.58MIL	
⚠ 5 VP801S	1405-000152	VARISTOR;560V,2500A,14x8.5mm,TP	
.....5 R125	2001-000005	R-CARBON;390ohm,5%,1/8W,AA,TP,1.8x3.2mm	
.....5 R125	2001-000006	R-CARBON;2.4KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R308	2001-000016	R-CARBON(S);1OHM,5%,1/2W,AA,TP,2.4X6.4MM	
.....5 R470	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R422	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R836	2001-000052	R-CARBON(S);3.3KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R493	2001-000052	R-CARBON(S);3.3KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 RS804	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R855	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 RS808	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 RS803	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R814	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R813	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R812	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R439	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R438	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R811	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R834	2001-000109	R-CARBON(S);470OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R125	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000262	R-CARBON;1.8MOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000508	R-CARBON;220KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 R125	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000761	R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000761	R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000761	R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000761	R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000761	R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000800	R-CARBON;5.1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000800	R-CARBON;5.1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-001031	R-CARBON;91KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 RS807	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
.....5 R854	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
.....5 R839	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
.....5 R413	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
⚠ 5 RR401S	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
.....5 R434	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
.....5 R837	2001-001108	R-CARBON(S);22KOHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R468	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 RS802	2001-001124	R-CARBON(S);3.9OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R433	2001-001155	R-CARBON(S);5.6KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R410	2001-001155	R-CARBON(S);5.6KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 RS806	2001-001168	R-CARBON(S);6.8KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R459	2001-001192	R-CARBON(S);820OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R851	2001-001196	R-CARBON(S);9.1KOHM,5%,1/2W,AA,TP,2.4X6.	
⚠ 5 RP801S	2002-001010	R-COMPOSITION;1.8Mohm,5%,1/2W,AA,TP,3.7x	
⚠ 5 RY801S	2002-001013	R-COMPOSITION;4.7Mohm,5%,1/2W,AA,TP,3.7x	
.....5 R428	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
.....5 R428A	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
.....5 R429	2003-000586	R-METAL OXIDE(S);22Kohm,5%,2W,AF,TP,4x12	
.....5 R430	2003-000586	R-METAL OXIDE(S);22Kohm,5%,2W,AF,TP,4x12	
.....5 R463	2003-001024	R-METAL OXIDE(S);150ohm,5%,2W,AF,TP,3.9x	
.....5 R310	2003-001024	R-METAL OXIDE(S);150ohm,5%,2W,AF,TP,3.9x	
.....5 R460	2003-002044	R-METAL OXIDE(S);100ohm,5%,1W,AF,TP,2.5x	
.....5 R426	2003-002153	R-METAL OXIDE;4.7OHM,5%,2W,AG,TP,6X16MM	
.....5 R443A	2003-002156	R-METAL OXIDE;560OHM,5%,2W,AG,TP,6X16MM	
.....5 R443	2003-002156	R-METAL OXIDE;560OHM,5%,2W,AG,TP,6X16MM	
.....5 R464	2003-002158	R-METAL OXIDE;0.68OHM,5%,1W,AG,TP,4.3X12	
.....5 R421	2003-002159	R-METAL OXIDE;150OHM,5%,1W,AG,TP,4.3X12M	
.....5 R024	2004-001369	R-METAL(S);1.2Kohm,1%,1/2W,AA,TP,2.4x6.4	
.....5 R024	2004-001386	R-METAL(S);16.9Kohm,1%,1/2W,AA,TP,2.4x6.	
.....5 R024	2004-001395	R-METAL(S);330Kohm,2%,1/2W,AA,TP,2.4x6.4	
.....5 R024	2004-001408	R-METAL(S);91Kohm,1%,1/2W,AA,TP,2.4x6.4m	
.....5 R024	2004-001892	R-METAL(S);162Kohm,1%,1/2W,AA,TP,2.5x6.5	
.....5 R024	2004-001892	R-METAL(S);162Kohm,1%,1/2W,AA,TP,2.5x6.5	
.....5 R024	2004-001897	R-METAL(S);43.2Kohm,1%,1/2W,AA,TP,2.5x6.	
.....5 R024	2004-001897	R-METAL(S);43.2Kohm,1%,1/2W,AA,TP,2.5x6.	
.....5 R024	2004-001984	R-METAL(S);26.7Kohm,1%,1/2W,AA,TP,2.4x6.	
.....5 R024	2004-001984	R-METAL(S);26.7Kohm,1%,1/2W,AA,TP,2.4x6.	
.....5 R024	2004-001984	R-METAL(S);26.7Kohm,1%,1/2W,AA,TP,2.4x6.	
.....5 R024	2004-002011	R-METAL(S);110Kohm,1%,1/2W,AA,TP,2.4x6.4	
.....5 R024	2004-004001	R-METAL(S);180Kohm,1%,1/2W,AA,TP,2.5x6.5	
.....5 R024	2004-004046	R-METAL(S);430Kohm,1%,1/2W,AA,TP,2.5x6.5	
.....5 R024	2004-004046	R-METAL(S);430Kohm,1%,1/2W,AA,TP,2.5x6.5	
.....5 R024	2004-004366	R-METAL(S);1.3Kohm,1%,1/2W,AA,TP,2.5x6.5	
.....5 R472	2008-000252	R-FUSIBLE(S);0.47ohm,10%,1/2W,AF,TP,2.5x	
.....5 R465	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
.....5 R449	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
.....5 R445	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
.....5 R442	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
.....5 R441	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
.....5 R447	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
.....5 R442A	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
.....5 R307	2008-000290	R-FUSIBLE(S);2.4ohm,5%,2W,AF,TP,3.9x10mm	
.....5 R486	2008-001018	R-FUSIBLE(S);0.47ohm,10%,2W,AF,TP,3.9x10	
.....5 R838	2008-001053	R-FUSIBLE;22ohm,5%,1/2W,AF,TP,2.5x6.5mm	
.....5 R437	2008-001087	R-FUSIBLE(S);1.8ohm,5%,2W,AG,TP,3.9x12mm	
.....5 R485	2008-001137	R-FUSIBLE(S);3.3ohm,5%,1W,AF,TP,3.9x10mm	

Loc. No.	Code No.	Description ; Specification	Remark
⚠ 5 R405	2009-001109	R-TEMPERATURE;240ohm,5%,1/4W,AA,TP,2.3x6	
⚠ 5 RR471S	2103-001024	VR-SEMI;50Kohm,25%,0.3W,TOP	
⚠ 5 RR402S	2103-001086	VR-SEMI;100KOHM,25%,0.3W,TOP	
.....5 C598	2201-000119	C-CERAMIC,DISC;100NF,+80-20%,50V,Y5V,TP,	
.....5 C598	2201-000119	C-CERAMIC,DISC;100NF,+80-20%,50V,Y5V,TP,	
.....5 C598	2201-000119	C-CERAMIC,DISC;100NF,+80-20%,50V,Y5V,TP,	
.....5 C598	2201-000119	C-CERAMIC,DISC;100NF,+80-20%,50V,Y5V,TP,	
.....5 C598	2201-000132	C-CERAMIC,DISC;0.1NF,10%,500V,Y5P,TP,6.5	
.....5 C598	2201-000132	C-CERAMIC,DISC;0.1NF,10%,500V,Y5P,TP,6.5	
.....5 C598	2201-000132	C-CERAMIC,DISC;0.1NF,10%,500V,Y5P,TP,6.5	
.....5 C598	2201-000132	C-CERAMIC,DISC;0.1NF,10%,500V,Y5P,TP,6.5	
.....5 C598	2201-000132	C-CERAMIC,DISC;0.1NF,10%,500V,Y5P,TP,6.5	
.....5 C598	2201-000138	C-CERAMIC,DISC;0.1NF,10%,50V,Y5P,TP,4X4M	
.....5 C598	2201-000146	C-CERAMIC,DISC;0.1NF,5%,50V,SL,TP,5X3.5M	
.....5 C598	2201-000146	C-CERAMIC,DISC;0.1NF,5%,50V,SL,TP,5X3.5M	
.....5 C598	2201-000180	C-CERAMIC,DISC;10NF,10%,50V,Y5V,TP,7X3MM	
.....5 C598	2201-000180	C-CERAMIC,DISC;10NF,10%,50V,Y5V,TP,7X3MM	
.....5 C598	2201-000017	C-CERAMIC,DISC;1NF,10%,50V,Y5P,TP,5X3.5M	
.....5 C598	2201-000017	C-CERAMIC,DISC;1NF,10%,50V,Y5P,TP,5X3.5M	
.....5 C598	2201-000017	C-CERAMIC,DISC;1NF,10%,50V,Y5P,TP,5X3.5M	
.....5 C598	2201-000332	C-CERAMIC,DISC;2.2NF,20%,250V,Y5U,TP,9X4	
.....5 C598	2201-000332	C-CERAMIC,DISC;2.2NF,20%,250V,Y5U,TP,9X4	
.....5 C598	2201-000332	C-CERAMIC,DISC;2.2NF,20%,250V,Y5U,TP,9X4	
.....5 C598	2201-000370	C-CERAMIC,DISC;0.22NF,10%,50V,Y5P,TP,4X3	
.....5 C598	2201-000406	C-CERAMIC,DISC;0.27NF,10%,2KV,Y5P,TP,6.3	
.....5 C598	2201-000551	C-CERAMIC,DISC;0.47NF,10%,1KV,Y5P,TP,6.3	
.....5 C598	2201-000551	C-CERAMIC,DISC;0.47NF,10%,1KV,Y5P,TP,6.3	
.....5 C598	2201-000551	C-CERAMIC,DISC;0.47NF,10%,1KV,Y5P,TP,6.3	
.....5 C598	2201-000551	C-CERAMIC,DISC;0.47NF,10%,1KV,Y5P,TP,6.3	
.....5 C598	2201-000551	C-CERAMIC,DISC;0.47NF,10%,1KV,Y5P,TP,6.3	
.....5 C598	2201-000558	C-CERAMIC,DISC;0.47NF,10%,50V,Y5P,TP,5X3	
.....5 C478	2301-000020	C-FILM,PEF;27nF,5%,100V,TP,7.3x4x12.5mm,	
.....5 C479	2301-000200	C-FILM,PEF;2.2nF,5%,200V,TP,11.0x6.0x9.0	
.....5 C477	2301-000213	C-FILM,PEF;220nF,5%,250V,TP,21.5x11,7.5	
.....5 CS801	2301-000356	C-FILM,PEF;47nF,5%,50V,TP,7.5x4.0x6.5,5m	
.....5 C493	2301-000356	C-FILM,PEF;47nF,5%,50V,TP,7.5x4.0x6.5,5m	
.....5 C412	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
.....5 C831	2301-001216	C-FILM,PPF;47nF,5%,630V,TP,20x14.5x22,7.	
.....5 C460	2303-000331	C-FILM,PPF;4.7nF,5%,630V,TP,19.5x12x7,7.	
.....5 C311	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
.....5 C487	2305-000178	C-FILM,MPEF;10nF,5%,100V,TP,-,5mm	
.....5 C309	2305-000285	C-FILM,MPEF;220NF,5%,100V,TP,10.5X5.5X15	
.....5 C838	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
.....5 C865	2305-000427	C-FILM,MPEF;47nF,5%,100V,TP,7.5x12.5x3.5	
.....5 C303	2305-000427	C-FILM,MPEF;47nF,5%,100V,TP,7.5x12.5x3.5	
.....5 C301	2305-000427	C-FILM,MPEF;47nF,5%,100V,TP,7.5x12.5x3.5	
.....5 C429	2305-000704	C-FILM,MPEF;100nF,5%,250V,TP,16.5x10.3x5	
.....5 C428	2306-000122	C-FILM,MPPF;100nF,5%,50V,TP,7.3x4.0x5.0m	
.....5 C480	2306-000122	C-FILM,MPPF;100nF,5%,50V,TP,7.3x4.0x5.0m	
.....5 C701	2401-000164	C-AL;1000uF,20%,25V,WT,TP,12.5x20,5	
.....5 C701	2401-000262	C-AL;100uF,20%,160V,HR,TP,16x25,7.5	
.....5 C701	2401-000262	C-AL;100uF,20%,160V,HR,TP,16x25,7.5	
.....5 C701	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
.....5 C701	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
.....5 C701	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
.....5 C701	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
.....5 C701	2401-000365	C-AL;100uF,20%,50V,WT,TP,10x12.5mm,	
.....5 C701	2401-000365	C-AL;100uF,20%,50V,WT,TP,10x12.5mm,	
.....5 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000603	C-AL;1UF,20%,50V,GP,TP,5X11,2	
.....5 C701	2401-000660	C-AL;2.2uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000703	C-AL;2200uF,20%,25V,GP,-,12.5x25mm,	
.....5 C701	2401-001026	C-AL;3.3UF,20%,50V,GP,TP,5X11,5	
.....5 C701	2401-001026	C-AL;3.3UF,20%,50V,GP,TP,5X11,5	
.....5 C701	2401-001192	C-AL;33uF,20%,50V,GP,TP,6.3x11,5	
.....5 C701	2401-001397	C-AL;470uF,20%,25V,GP,TP,10x16,5	
.....5 C701	2401-001428	C-AL;470uF,20%,50V,GP,TP,10x20,5	
.....5 C701	2401-001527	C-AL;47uF,20%,250V,HR,TP,13x25mm,5m	
.....5 C701	2401-001622	C-AL;6.8uF,20%,50V,BP,TP,16x25mm,7.	
.....5 C701	2401-000025	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
.....5 C701	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
.....5 C701	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
.....5 C701	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
.....5 C701	2401-002216	C-AL;2200uF,20%,35V,GP,TP,16x25,7.5	
.....5 C701	2401-002216	C-AL;2200uF,20%,35V,GP,TP,16x25,7.5	
.....5 C701	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
.....5 C701	2401-002288	C-AL;470uF,20%,25V,WT,TP,10x20,5	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 C701	2401-002288	C-AL;470uF,20%,25V,WT,TP,10x20,5	
.....5 C701	2401-002300	C-AL;47uF,20%,50V,GP,TP,6.3x11,5	
.....5 C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
.....5 C701	2401-003114	C-AL;4.7uF,20%,250V,WT,TP,10x16,5	
.....5 L431	2701-000116	INDUCTOR-AXIAL;10uH,10%,4.2x9.8mm	
.....5 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
.....5 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
.....5 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
.....5 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
.....5 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
.....5 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
.....5 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
.....5 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
.....5 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
.....5 F101	2901-000299	FILTER-EMI ON BOARD;-,6A,UL/CSA,-,9x7.5,	
.....5 G101	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
.....5 G101	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
.....5 G101	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
.....5 G101	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
.....5 G101	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
.....5 G101	3301-000374	CORE-FERRITE BEAD;AA,3.5x1.0x9.0mm,-,-	
.....5 G101	3301-000374	CORE-FERRITE BEAD;AA,3.5x1.0x9.0mm,-,-	
⚠ 5 FD801S	3601-000120	FUSE-AXIAL LEAD;125V,2.5A,FAST-ACTING,GL	
⚠ 5 FD871S	3601-001086	FUSE-AXIAL LEAD;125V,5A,FAST-ACTING,GLAS	
⚠ 5 FD854S	3601-001086	FUSE-AXIAL LEAD;125V,5A,FAST-ACTING,GLAS	
⚠ 5 FD805S	3601-001086	FUSE-AXIAL LEAD;125V,5A,FAST-ACTING,GLAS	
.....5 F801B	3602-000114	FUSE-HOLDER;-,-,30mohm	
.....5 F801A	3602-000114	FUSE-HOLDER;-,-,30mohm	
.....5 CN906	3711-002645	CONNECTOR-HEADER;BOX,6P,1R,2.5mm,STRAIGH	
.....5 EY45	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY44	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY43	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY36	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY35	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY34	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY31	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY30	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY67	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY66	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY65	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY64	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY50	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY49	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY47	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY46	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY21	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY20	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY19	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY18	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY17	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY16	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY155	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY154	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY29	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY28	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY27	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY26	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY25	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY24	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY23	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY22	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY91	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY90	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY89	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY88	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY87	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY86	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY85	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY99	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY98	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY97	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY96	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY95	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY94	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY93	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY92	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A

Loc. No.	Code No.	Description ; Specification	Remark
.....5 EY75	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY74	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY73	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY72	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY71	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY70	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY69	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY68	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY82	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY81	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY80	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY79	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY78	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY77	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY76	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY153	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY111	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY11	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY109	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY108	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY107	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY106	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY12	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY119	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY118	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY117	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY116	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY115	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY114	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY113	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY08	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY07	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY06	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY05	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY04	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY03	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY02	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY01	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY105	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY104	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY103	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY102	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY101	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY100	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY10	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY09	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY141	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY140	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY14	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY139	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY138	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY137	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY136	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY135	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY152	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY151	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY150	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY15	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY149	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY148	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY147	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY142	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY127	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY126	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY125	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY124	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY123	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY122	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY121	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY120	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY134	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY133	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY132	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY131	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY128	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY129	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY13	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A

Loc. No.	Code No.	Description ; Specification	Remark
.....5 EY130	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY83	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY84	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY32	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY37	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY38	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY52	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EY53	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EY54	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EY55	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EY51	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EY42	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EY41	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EY40	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EY63	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EY62	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EY61	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EY60	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EY59	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EY58	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EY57	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EY56	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EL08	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EL07	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EL06	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EL05	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EL04	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EL03	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EL02	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EL01	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EY39	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EL16	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EL15	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EL14	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EL10	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EL11	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EL12	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EL13	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 GT35	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT34	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT33	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT404	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT801	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT802	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT810	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT811	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT14	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT15	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT16	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT17	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT807	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT433	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 T0083	0402-001286	DIODE-RECTIFIER;RP1H,2000V,.1A,-,TP	
.....5 R024	2004-001893	R-METAL(S);22Kohm,1%,1/2W,AA,TP,2.5x6.5m	
.....5 R024	2004-001402	R-METAL(S);6.8Kohm,1%,1/2W,AA,TP,2.4x6.4	
.....5 R462	2008-001145	R-FUSIBLE;4.7OHM,5%,1/2W,AF,TP,2.5X6.5MM	
.....5 R125	2001-000745	R-CARBON;4.7OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 C701	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
.....5 C701	2401-001655	C-AL;680uF,20%,25V,GP,TP,10x20,5	
.....5 C871	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	
.....5 C701	2401-001486	C-AL;47uF,20%,160V,HR,TP,13x20mm,5m	
.....5 R431	2001-001153	R-CARBON(S);47OHM,5%,1/2W,AA,TP,2.4X6.4M	
.....5 G101	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
.....5 R833	2009-000017	R-METAL PLATE;0.1ohm,10%,5W,CL,TP,5x14x1	
.....5 C701	2401-001625	C-AL;6.8uF,20%,50V,GP,TP,5x11,5	
.....5 FD802S	3601-001228	FUSE-AXIAL LEAD;125V,10A,FAST-ACTING,EPO	
.....5 FD855S	3601-001228	FUSE-AXIAL LEAD;125V,10A,FAST-ACTING,EPO	
.....5 R306	2008-001076	R-FUSIBLE(S);1.8ohm,5%,2W,AF,TP,3.9x10mm	
.....5 R125	2001-000554	R-CARBON;270OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R427	2003-002152	R-METAL OXIDE;1OHM,5%,2W,AG,TP,6X16MM	
.....5 R427A	2003-002152	R-METAL OXIDE;1OHM,5%,2W,AG,TP,6X16MM	
.....5 C701	2401-000698	C-AL;2200uF,20%,16V,WT,TP,12.5x25,5	
.....5 R424	2008-000289	R-FUSIBLE(S);1ohm,5%,1W,AA,TP,3.9x10mm	
.....5 C432	2303-000002	C-FILM,PPF;8.2nF 5% 400V TP 19X18X7,7.5m	
.....5 C438	2303-000002	C-FILM,PPF;8.2nF 5% 400V TP 19X18X7,7.5m	
.....5 R440	2008-000282	R-FUSIBLE;0.47ohm,5%,1W,AA,TP,3.9x12mm	
.....5 R831	2003-000512	R-METAL OXIDE(S);15Kohm,5%,3W,AA,TP,6x16	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 R832	2003-000512	R-METAL OXIDE(S);15Kohm,5%,3W,AA,TP,6x16	
.....5 R425	2003-000417	R-METAL OXIDE(S);1.2Kohm,5%,3W,AA,TP,6x1	
.....5 R853	2008-001152	R-FUSIBLE(S);1.3KOHM,5%,1/2W,AA,TP,2.5X6	
.....5 0	AA41-00598D	PCB-SUB;HCM4215W,CEM-1,1L,D,1.6T,330X245	S.N.A
.....5 R024	2004-005051	R-METAL(S);2.2KOHM,1%,1/2W,AA,TP,2.4X6.4	
⚠ 5 RS801S	3601-000102	FUSE-AXIAL LEAD;125V,1A,FAST-ACTING,GLAS	
.....5 R840	2001-001045	R-CARBON(S);1.2KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R841	2003-002102	R-METAL OXIDE(S);68Kohm,5%,2W,AF,TP,4x12	
.....5 R024	2004-004029	R-METAL(S);10Kohm,1%,1/2W,AA,TP,2.5x6.5m	
.....5 R801	2003-002285	R-METAL OXIDE(S);1.5KOHM,5%,2W,AF,TP,6X1	
.....5 DZ016	0403-000698	DIODE-ZENER;TZP12A,12V,11.4-12.6V,1W,DO-	
.....5 Q409	0505-001723	FET-SILICON;FQP630TSTU,N,200V,9A,0.4OHM,	
.....5 Q409	0505-001723	FET-SILICON;FQP630TSTU,N,200V,9A,0.4OHM,	
....4 Q431	BH99-00033H	ASSY HEAT/SINK;BH62-00038A,SPRING,FJL692	S.N.A
.....5 T0083	0402-001296	DIODE-RECTIFIER;FMP-3FU,1.5KV,5A,TO-3PF,	
.....5 T0060	BH61-70003A	SPRING ETC;CVT4857,STS304-W1/2H,W3.8,-,L	S.N.A
.....5 T0090	0502-001230	TR-POWER;FJL6920YDTU,N,200000MW,TO-264 F	
.....5 CIS	BH62-00038B	HEAT SINK-FBT;COMMANDO,A1050S,T2.0,85*80	S.N.A
.....5 CIS	BH73-00028A	SILICON/RUBBER-HS;CDT ALL,SILICON,26*33*	S.N.A
.....5 CIS	0205-001027	OIL-SILICON;G746,-,-	S.N.A
⚠ 4 TS801S	BP26-00001A	TRANS SWITCHING-POWER;19B012,P55A,HCM421	
⚠ 4 PC801S	0604-001032	PHOTO-COUPLER;TR,170-260%,300mW,DIP-4,ST	
⚠ 4 PC811S	0604-001032	PHOTO-COUPLER;TR,170-260%,300mW,DIP-4,ST	
....4 DU410	1201-000191	IC-OP AMP;4558,DIP,8P,300MIL,DUAL,20V/mV	
....4 T0086	1203-000610	IC-PWM CONTROLLER;494,DIP,16P,300MIL,PLA	
....4 IC851	1203-001400	IC-POWER PRESCALER;SE110N,T0-220(SIP),3P	
....4 C598	2201-000446	C-CERAMIC,DISC;3.3NF,20%,400V,Y5U,TP,15X	
....4 C598	2201-000446	C-CERAMIC,DISC;3.3NF,20%,400V,Y5U,TP,15X	
....4 C598	2201-000446	C-CERAMIC,DISC;3.3NF,20%,400V,Y5U,TP,15X	
....4 C598	2201-000446	C-CERAMIC,DISC;3.3NF,20%,400V,Y5U,TP,15X	
⚠ 4 CR471S	2301-001091	C-FILM,MPPF;470nF,5%,400V,TP,26x21.5x14.	
⚠ 4 CR436S	2306-000235	C-FILM,MPPF;560nF,5%,400V,TP,26*22.5*14,	
....4 C491	2306-000322	C-FILM,MPPF;12nF,5%,1.6KV,TP,29x20.5x13,	
⚠ 4 CR473S	2306-000322	C-FILM,MPPF;12nF,5%,1.6KV,TP,29x20.5x13,	
⚠ 4 CR474S	2306-000326	C-FILM,MPPF;4.7nF,5%,1.6KV,TP,28.5x16x9m	
....4 L862	AA27-10001C	COIL CHOKE;-,100uH,K,-,5.0A,ST,700UH-K(R	
....4 L863	AA27-10001C	COIL CHOKE;-,100uH,K,-,5.0A,ST,700UH-K(R	
⚠ 4 LX801S	AA29-30002L	FILTER LINE NOISE;-,10mHMIN,5A,AC90~260V	
⚠ 4 LX802S	AA29-30002M	FILTER LINE NOISE;-,1mHMIN,5A,AC90~260V,	
⚠ 4 LX803S	AA29-30002M	FILTER LINE NOISE;-,1mHMIN,5A,AC90~260V,	
⚠ 4 LX804S	AA29-30002M	FILTER LINE NOISE;-,1mHMIN,5A,AC90~260V,	
....4 C701	2401-000142	C-AL;1000uF,20%,16V,WT,TP,10x20,5	
....4 L864	AA27-10002L	COIL CHOKE;-,24uH,K,-,2A,-,24UH-K,10x10m	
....4 T0086	1203-002177	IC-PWM CONTROLLER;VIPER12ADIP,DIP,8P,300	
⚠ 4 IC421	AA96-00475B	ASSY H/S;SILICON-OIL,FMLG-12S(4),AA62-00	S.N.A
.....5	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
.....5 T0083	0402-000233	DIODE-RECTIFIER;FML-G12S,200V,5A,-,-	
.....5 IC012	1203-000165	IC-POSI.ADJUST REG.;78R12,TO-220,4P,-,PL	
.....5 T0081	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
.....5	AA62-00066B	HEAT SINK;D2,D3,AL ,T1.0,89,70,-,AA62-00	S.N.A
....4 C814	2301-001041	C-FILM,PPF;15nF,5%,1.6KV,TP,29x14x21.5,2	
....4 DZS801	0406-001007	DIODE-TVS;P6KE180A,171/180/189V,600W,CAS	
⚠ 4 T801S	BP26-00002A	TRANS SWITCHING;EER5345,P55A,160V~280V,P	
⚠ 4 CR430S	2301-001343	C-FILM,MPPF;3.9nF,5%,2kV,TP,29x9.5x16mm,	
⚠ 4 CR431S	2301-001343	C-FILM,MPPF;3.9nF,5%,2kV,TP,29x9.5x16mm,	
⚠ 4 T432	AA26-00053A	TRANS;-,-,-,1.2mH,-,-,-,-,-,-,31.5KHZ,-,	
....4 T0076	BP39-00014A	LEAD CONNECTOR-ASSY;P55A/HCM4215W,UL1007	
....4 T0121	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
....4 T0090	0502-000405	TR-POWER;-,NPN,70W,TO-220,BK,10	
....4 T0123	1203-001006	IC-VOLTAGE REGULATOR;78R05,TO-220F,4P,-,	
....4	BP39-00017A	LEAD CONNECTOR;P55A/HCM4215W,UL1617#22,U	
.....5 T0121	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
....4 GT01	AA60-40012D	PIN-GT,ASSY;T1.6,6-12.5-,NYLON66	S.N.A
....4 CN906	3711-003043	CONNECTOR-HEADER;BOX,4P,1R,2.5MM,STRAIGH	
....4 C598	2201-000963	C-CERAMIC,DISC;1NF,20%,400V,Y5U,TP,9.5X6	
....4 C598	2201-000963	C-CERAMIC,DISC;1NF,20%,400V,Y5U,TP,9.5X6	
....4 IC012	1203-000162	IC-POSI.ADJUST REG.;317,TO-220,3P,-,PLAS	
....4 C701	2401-000787	C-AL;220uF,20%,160V,GP,TP,16x31.5mm	
⚠ 4 VX801S	1405-000187	VARISTOR;750V,1250A,12.5x7mm,TP	
....4 C832	2301-001418	C-FILM,MPPF;1.5nF,5%,2kV,TP,29x7x13.5mm,	
....4 L432	AA27-00056A	COIL HORIZ. WIDTH;-,600uH,YL9N 15x27.5 C	
....4 R384	2002-001079	R-COMPOSITION;470Kohm,5%,1/2W,AA,TP,4x10	
....4 Q473	BP96-00006B	ASSY HEAT SINK P;HS,SCREW,IRF640B,2SC412	S.N.A
.....5 CIS	0205-001027	OIL-SILICON;G746,-,-	S.N.A
.....5 T0090	0502-001100	TR-POWER;2SC4125,NPN,70W,TO-3PML,BK,8-	
.....5 Q409	0505-001722	FET-SILICON;IRFS640B,N,200V,18A,0.18OHM,	
.....5 T0081	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A

Loc. No.	Code No.	Description ; Specification	Remark
.....5 CIS	AA60-30001A	WASHER-PLATE;M3,ID3.5,15X8.5,T1.0,SBHG	S.N.A
.....5 CIS	BP62-00001A	HEAT SINK;COMMANDO,A1050P,T2.0,W62.0,H50	S.N.A
...3	AA98-01177B	ASSY K/D-P/MATERIAL;PJTV(COMANDO),P55A	S.N.A
....4	AA63-10007C	BAND-PP;W18,CLEA,1G	S.N.A
....4	AA69-01808A	BAG-SHEET;,LDPE(ANTISTATIC),T0.05,950,90	S.N.A
....4	AA69-01403A	WRAP VINYL-PACKING;SKD CHASSIS,LDPE,T0.0	S.N.A
...3 T0073	BP94-00500C	ASSY PCB MAIN;HCN4727WSC/XAA,P55A	
....4	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
....4 IC802	1203-000119	IC-NEGA.FIXED REG.;7905,TO-220,3P,-,PLAS	
....4 IC012	1203-000165	IC-POSI.ADJUST REG.;78R12,TO-220,4P,-,PL	
....4 C701	2401-000737	C-AL;2200uF,20%,50V,GP,TP,18x35.5,7	
....4 C701	2401-001068	C-AL;3300uF,20%,50V,GP,BK,22x40,10	
....4 X601	2801-004020	CRYSTAL-UNIT;18.432MHz,30ppm,28-AAM,12pF	
....4 CNW01	3703-001150	CONNECTOR-BACK PANEL;32P,2R,FEMALE,STRAI	
....4 CNW02	3703-001150	CONNECTOR-BACK PANEL;32P,2R,FEMALE,STRAI	
....4 CNZ01	3703-001150	CONNECTOR-BACK PANEL;32P,2R,FEMALE,STRAI	
....4 CN901	3703-001187	CONNECTOR-BACK PANEL;64P,2R,FEMALE,STRAI	
....4 CN906	3711-003046	CONNECTOR-HEADER;BOX,9P,1R,2.5MM,STRAIGH	
....4 CN906	3711-003641	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,STRAIG	
....4 CN906	3711-003973	CONNECTOR-HEADER;BOX,11P,1R,2.5mm,STRAIG	
....4 CN906	3711-003975	CONNECTOR-HEADER;BOX,14P,1R,2.5mm,STRAIG	
....4 CN906	3711-004946	CONNECTOR-HEADER;BOX,15P,1R,2.5MM,STRAIG	
....4 JA703	3722-001163	JACK-VHS;4P,12mm,AU,BLK,N	
....4 JA701	3722-001426	JACK-PIN;9P,3.4mm,NI,BLK,-	
....4 JA704	3722-001796	JACK-PIN;7P(10P),-,NI,RD/RD/WH/WH/RD/BL/	
....4 JA702	3722-001871	JACK-PIN;5P(9P),8.3MM,NI,GRN/BLU/RED/WHT	
....4 L802	AA27-10001C	COIL CHOKE;-,100uH,K,-,5.0A,ST,700UH-K(R	
....4 L801	AA29-00004A	FILTER LINE NOISE;-,20UH,3A,AC80-260V,TQ	
....4 T0076	AA39-20010B	LEAD CONNECTOR-ASSY;,1P,500,YFH800-01,S,	
....4 T0076	AA39-20010B	LEAD CONNECTOR-ASSY;,1P,500,YFH800-01,S,	
....4 TU02	AA40-00049A	TUNER;TCPN3081PC19C(S),TCPN3081PC19C(S),	
....4 TU04	AA40-00049A	TUNER;TCPN3081PC19C(S),TCPN3081PC19C(S),	
....4 TU01	AA59-00164A	MODULE-RF,SPLITTER;-,UMX-NT-005,-,2IN/3O	
....4	AA63-00396B	SHIELD CASE-TOP;PRJT,P54A,SPTE,T0.5,-,-,	S.N.A
....4	AA63-00397B	SHIELD CASE-BOT;PRJT,P54A,SPTE,T0.5,-,-,	S.N.A
....4	AA63-00610A	SHIELD CASE;COMMANDO,SPTE,T0.5,W141.5,H1	S.N.A
....4	AA63-10002A	BAND-TIE;NYLON66 V2,L100,NTR	S.N.A
....4	AA65-30018A	CLAMPER CORE-WIRE;DONG-A,NYLON-66,-,-,-,	S.N.A
....4	AA65-30111A	CLAMPER CORE-WIRE;ALL MODEL,NYLON,V0,-,WS	S.N.A
....4 T0104	AA95-02001K	ASSY SUB-PCB MICOM;,C2	
.....5 T0083	0402-000274	DIODE-RECTIFIER;UF4004,400V,1A,DO-41,TP	
.....5 Q409	0505-000109	FET-SILICON;2N7000,N,60V,200mA,5ohm,400m	
.....5 Q409	0505-000109	FET-SILICON;2N7000,N,60V,200mA,5ohm,400m	
.....5 IC904	1203-001943	IC-VOL. DETECTOR;7025,TO-92,3P,-,PLASTIC	
.....5 X901	2801-004071	CRYSTAL-UNIT;6MHZ,30PPM,28-AAM,20PF,40OH	
.....5 CN901	3703-001175	CONNECTOR-BACK PANEL;64P,2R,MALE,ANGLE,A	
.....5	AA97-07275A	ASSY SMD;SVP-47W3HRT,P55A, , ,	S.N.A
......6 D905	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
......6 D906	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
......6 D920	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
......6 D923	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
......6 D602	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
......6 D901	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
......6 D902	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
......6 DZ016	0403-001375	DIODE-ZENER;RLZ3.6B,3.6-3.845V,500mW,LL-	
......6 DZ016	0403-001375	DIODE-ZENER;RLZ3.6B,3.6-3.845V,500mW,LL-	
......6 DZ016	0403-001375	DIODE-ZENER;RLZ3.6B,3.6-3.845V,500mW,LL-	
......6 DZ016	0403-001375	DIODE-ZENER;RLZ3.6B,3.6-3.845V,500mW,LL-	
......6 DZ016	0403-001375	DIODE-ZENER;RLZ3.6B,3.6-3.845V,500mW,LL-	
......6 DZ016	0403-001375	DIODE-ZENER;RLZ3.6B,3.6-3.845V,500mW,LL-	
......6 DZ016	0403-001375	DIODE-ZENER;RLZ3.6B,3.6-3.845V,500mW,LL-	
......6 Q915	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
......6 Q916	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
......6 Q917	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
......6 Q920	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
......6 Q914	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
......6 Q913	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
......6 Q910	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
......6 Q908	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
......6 Q902	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
......6 IC112	1103-000180	IC-EEPROM;24C16,2Kx8Bit,SOP,8P,150MIL,10	
......6 T0087	1203-002302	IC-POSI.FIXED REG.;78RM33D,D-PAK,3P,-,PL	
......6 IC901	1204-001912	IC-DECODER;SDA5550M,P-MQFP,100P,-,PLASTI	
......6 R981	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
......6 R964	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
......6 R960	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
......6 R959	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
......6 R965	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
......6 R956	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
......6 R953	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
......6 R952	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
......6 R969	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
......6 R970	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
......6 R972	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
......6 R979	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
......6 R940	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
......6 R909	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
......6 R916	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
......6 R918	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
......6 R939	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
......6 R923	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
......6 R922	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
......6 R907	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
......6 R917	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
......6 R911	2007-000076	R-CHIP;330ohm,5%,1/10W,TP,1608	
......6 R963	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
......6 R901	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
......6 R930	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
......6 R933	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
......6 R936	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
......6 R974	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
......6 R905	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
......6 R921	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
......6 R924	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
......6 R925	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
......6 R915	2007-000081	R-CHIP;2.7Kohm,5%,1/10W,TP,1608	
......6 R913	2007-000081	R-CHIP;2.7Kohm,5%,1/10W,TP,1608	
......6 R912	2007-000081	R-CHIP;2.7Kohm,5%,1/10W,TP,1608	
......6 R978	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
......6 R976	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
......6 R971	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
......6 R958	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
......6 R980	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
......6 R982	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
......6 R985	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
......6 R986	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
......6 R903	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
......6 R904	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
......6 R906	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
......6 R908	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
......6 R955	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
......6 R954	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
......6 R928	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
......6 R927	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
......6 R983	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
......6 R934	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
......6 R987	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
......6 R957	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
......6 R944	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
......6 R926	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	
......6 R975	2007-000121	R-CHIP;820ohm,5%,1/10W,TP,1608	
......6 R942	2007-000123	R-CHIP;1.5Kohm,5%,1/10W,TP,1608	
......6 R941	2007-000123	R-CHIP;1.5Kohm,5%,1/10W,TP,1608	
......6 R914	2007-000123	R-CHIP;1.5Kohm,5%,1/10W,TP,1608	
......6 R988	2007-000290	R-CHIP;100ohm,5%,1/8W,TP,2012	
......6 R962	2007-000583	R-CHIP;22Kohm,1%,1/10W,TP,1608	
......6 R961	2007-000939	R-CHIP;47Kohm,1%,1/10W,TP,1608	
......6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
......6 C120	2203-000221	C-CERAMIC,CHIP;100nF,20%,50V,Y5V,TP,3216	
......6 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
......6 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
......6 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
.....6 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....6 C120	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
.....6 C120	2203-000357	C-CERAMIC,CHIP;0.15NF,5%,50V,C0G,TP,1608	
.....6 C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....6 C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....6 C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....6 C120	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,-	
.....6 C120	2203-000748	C-CERAMIC,CHIP;0.03NF,5%,50V,C0G,TP,2012	
.....6 C120	2203-000748	C-CERAMIC,CHIP;0.03NF,5%,50V,C0G,TP,2012	
.....6 C120	2203-001048	C-CERAMIC,CHIP;0.56NF,10%,50V,C0G,TP,201	
.....6 C120	2203-005809	C-CERAMIC,CHIP;1000nF,10%,16V,X7R,TP,201	
.....6 C950	2402-000179	C-AL,SMD;47uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....6 C936	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....6 C921	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....6 C918	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....6 C915	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....6 C913	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....6 C938	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....6 C917	2402-001049	C-AL,CHIP;10uF,20%,16V,GP,TP,3.3x3.3x5.4	
.....6 C912	2402-001049	C-AL,CHIP;10uF,20%,16V,GP,TP,3.3x3.3x5.4	
.....6 C911	2402-001049	C-AL,CHIP;10uF,20%,16V,GP,TP,3.3x3.3x5.4	
.....6 L905	2703-001245	INDUCTOR-SMD;8.2uH,10%,2x1.25x1.25mm	
.....6 G101	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.....6 G101	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.....6 G101	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.....6 G101	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.....6 G101	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.....6 G101	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.....6 R949	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 R950	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 R951	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 R945	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 R946	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 R948	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 R966	2007-000931	R-CHIP;470ohm,5%,1/8W,TP,2012	
.....6 PCB	AA41-00599B	PCB-MICOM;HCM4215W,FR-4,2L,B,1.6T,180X24	S.N.A
.....6	0202-001167	SOLDER-CREAM;RX3603-2330HO,S45A,PASTE,SN	S.N.A
.....5 IC902	1102-001130	IC-EPROM;M27W201-80F6,256KX8BIT,DIP,32P,	
.....5	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
....4 IC801	AA96-00475C	ASSY H/S;SILICON-OIL,KA278R09,KA7808,AA6	S.N.A
.....5	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
.....5 T0087	1203-000293	IC-POSI.FIXED REG.;7808,TO-220,3P,-,PLAS	
.....5 T0123	1203-002003	IC-VOLTAGE REGULATOR;278R09,TO-220,4P,-,	
.....5 T0081	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
.....5	AA62-00066B	HEAT SINK;D2,D3,AL ,T1.0,89,70,-,AA62-00	S.N.A
.....5 T0123	1203-001978	IC-VOLTAGE REGULATOR;KA278RA05,TO-220F,4	
....4 IC601	AA96-00623E	ASSY H/S;SCREW,MAIN,AA62-00056A,TDA7265,	S.N.A
.....5	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
.....5 T0124	1201-001026	IC-POWER AMP;7265,ZIP,11P,19.6MIL,DUAL,1	
.....5 T0081	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
.....5	AA62-00056A	HEAT SINK-PS;-,-,T1.0,-,41*35*70,D2,-,-,	S.N.A
....4	BP39-00036A	LEAD CONNECTOR;J54A/SP42W5HP,UL2547#26,U	
....4	BP63-00030A	SHIELD CASE;COMMANDO,SPTE,T0.5,W26.0,L13	S.N.A
....4 T0095	BP95-00142N	ASSY SUB PCB-PRO SCAN;HCN4727WX/XAA,P55A	
.....5	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
.....5 FC48	2305-000011	C-FILM,MPEF;470nF,5%,250V,TP,21.5X13.0X7	
.....5 FC59	2305-000704	C-FILM,MPEF;100nF,5%,250V,TP,16.5x10.3x5	
.....5 FC58	2309-000138	C-FILM,PE-PPF;100nF,5%,50V,TP,20x16x8.5,	
.....5 EX01	2801-004019	CRYSTAL-UNIT;20.25MHz,30ppm,28-AAM,13pF,	
.....5 T0122	2802-001177	RESONATOR-CERAMIC;2.696MHZ,0.4%,BK,10X4.	
.....5 T0122	2802-001179	RESONATOR-CERAMIC;4MHZ,0.5%,BK,8X3X5.5MM	
.....5 CN02	3703-001124	CONNECTOR-BACK PANEL;32P,2R,MALE,ANGLE,A	
.....5 CN01	3703-001124	CONNECTOR-BACK PANEL;32P,2R,MALE,ANGLE,A	
.....5 CN906	3711-001164	CONNECTOR-HEADER;BOX,9P,1R,2.5mm,ANGLE,-	
.....5 CN906	3711-003601	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,ANGLE,	
.....5	BP97-00169A	ASSY SMD;HCM4215WJX/XAA,P55A	S.N.A
.....6 FD13	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....6 FD14	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....6 FD15	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....6 FD16	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....6 FD17	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....6 FD10	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....6 FD01	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....6 FD02	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....6 FD07	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....6 FD08	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....6 FD09	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	

Loc. No.	Code No.	Description ; Specification	Remark
.....6 DZ016	0403-000746	DIODE-ZENER;RLZ3.9B,3.89-4.16V,500MW,LL-	
.....6 DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
.....6 DZ016	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
.....6 DZ016	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
.....6 DZ016	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
.....6 DZ016	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
.....6 SQ01	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.....6 FQ13	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.....6 FQ04	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.....6 FQ03	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.....6 FQ02	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.....6 FQ08	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....6 FQ09	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....6 FQ12	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....6 PQ01	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....6 FQ06	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....6 FQ05	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....6 EQ15	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....6 EQ14	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....6 EQ13	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....6 FQ07	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
.....6 Q409	0505-000110	FET-SILICON;2N7002,N,60V,115MA,7.5OHM,0.	
.....6 Q409	0505-000110	FET-SILICON;2N7002,N,60V,115MA,7.5OHM,0.	
.....6 IC104	0801-000662	IC-CMOS LOGIC;74HC123,MULTIVIBATOR,SOP,1	
.....6 IC106	1001-001082	IC-VIDEO SWITCH;BA7657F,-,SOP,24P,300MIL	
.....6 IC06	1203-001211	IC-VOL. DETECTOR;7027,SOT-89,3P,-,PLASTI	
.....6 T0087	1203-002186	IC-POSI.FIXED REG.;18,DPAK,3P,240MIL,PLA	
.....6 T0087	1203-002302	IC-POSI.FIXED REG.;78RM33D,D-PAK,3P,-,PL	
.....6 IC02	1204-001814	IC-SELECTOR;CXA2151Q,QFP,48P,144MIL,PLAS	
.....6 IC01A	1204-001938	IC-DECODER;VSP9407B-B11,MQFP,80P,14X14MM	
.....6 IC118	1204-001989	IC-VIDEO PROCESS;CXA2165Q,QFP,64P,20X14M	
.....6 SR08	2007-000052	R-CHIP;10Kohm,1%,1/10W,TP,1608	
.....6 FR80	2007-000052	R-CHIP;10Kohm,1%,1/10W,TP,1608	
.....6 FR79	2007-000052	R-CHIP;10Kohm,1%,1/10W,TP,1608	
.....6 FR78	2007-000052	R-CHIP;10Kohm,1%,1/10W,TP,1608	
.....6 FR57	2007-000052	R-CHIP;10Kohm,1%,1/10W,TP,1608	
.....6 FR35	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 FR07	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 ER90	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 FR76	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 FR96	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 SR09	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 SR22	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 ER29	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 ER04	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 ER05	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 ER06	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 ER13	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 ER19	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 ER18	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 ER17	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 SR03	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 SR04	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 SR05	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 SR06	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 SR10	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 SR11	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 SR02	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 FR71	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 FR74	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 FR75	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 FR81	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 FR82	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 SR01	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 SR49	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 SR53	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 SR75	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 YR43	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 YR44	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 YR45	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 SR48	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 SR31	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 SR32	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 SR33	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 SR34	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 SR35	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 SR47	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
.....6 ER84	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 FR01	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 FR02	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 FR16	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 FR17	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 FR18	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 ER83	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 CR83	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 CR84	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 ER08	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 ER15	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 ER16	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 ER82	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 FR37	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 FR38	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 FR39	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 FR53	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 FR54	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 FR56	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 FR34	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 FR19	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 FR20	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 FR21	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 FR33	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 FR32	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 FR31	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 SR74	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
.....6 SR21	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
.....6 FR66	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
.....6 ER28	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
.....6 ER27	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
.....6 ER26	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
.....6 SR07	2007-000080	R-CHIP;2Kohm,5%,1/10W,TP,1608	
.....6 FR40	2007-000080	R-CHIP;2Kohm,5%,1/10W,TP,1608	
.....6 FR72	2007-000081	R-CHIP;2.7Kohm,5%,1/10W,TP,1608	
.....6 FR73	2007-000082	R-CHIP;3.3Kohm,5%,1/10W,TP,1608	
.....6 FR62	2007-000082	R-CHIP;3.3Kohm,5%,1/10W,TP,1608	
.....6 FR45	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6 FR44	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6 ER92	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6 ER91	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6 FR42	2007-000086	R-CHIP;5.6Kohm,5%,1/10W,TP,1608	
.....6 FR41	2007-000086	R-CHIP;5.6Kohm,5%,1/10W,TP,1608	
.....6 PR01	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....6 FR60	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....6 FR22	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....6 FR09	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....6 FR58	2007-000092	R-CHIP;15Kohm,5%,1/10W,TP,1608	
.....6 ER24	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	
.....6 ER25	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	
.....6 FR77	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	
.....6 PR02	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	
.....6 ER20	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	
.....6 ER21	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	
.....6 ER22	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	
.....6 ER23	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	
.....6 FR63	2007-000118	R-CHIP;390ohm,5%,1/10W,TP,1608	
.....6 FR70	2007-000124	R-CHIP;2.2Kohm,5%,1/10W,TP,1608	
.....6 FR47	2007-000124	R-CHIP;2.2Kohm,5%,1/10W,TP,1608	
.....6 FR46	2007-000124	R-CHIP;2.2Kohm,5%,1/10W,TP,1608	
.....6 FR15	2007-000210	R-CHIP;1.1Kohm,5%,1/8W,TP,2012	
.....6 FR14	2007-000210	R-CHIP;1.1Kohm,5%,1/8W,TP,2012	
.....6 FR13	2007-000210	R-CHIP;1.1Kohm,5%,1/8W,TP,2012	
.....6 FR10	2007-000210	R-CHIP;1.1Kohm,5%,1/8W,TP,2012	
.....6 FR11	2007-000210	R-CHIP;1.1Kohm,5%,1/8W,TP,2012	
.....6 FR12	2007-000210	R-CHIP;1.1Kohm,5%,1/8W,TP,2012	
.....6 SR73	2007-000259	R-CHIP;1.6Kohm,5%,1/10W,TP,1608	
.....6 SR26	2007-000309	R-CHIP;10ohm,5%,1/10W,TP,1608	
.....6 SR25	2007-000309	R-CHIP;10ohm,5%,1/10W,TP,1608	
.....6 SR23	2007-000309	R-CHIP;10ohm,5%,1/10W,TP,1608	
.....6 FR36	2007-000691	R-CHIP;3.3Mohm,5%,1/16W,DA,TP,1608	
.....6 FR43	2007-000869	R-CHIP;4.7Kohm,1%,1/10W,TP,1608	
.....6 ER14	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 SR36	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 SR37	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 SR38	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 SR39	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
.....6 SR40	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 ER12	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 EC30	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 EC31	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 ER03	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 ER11	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 ER10	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 ER09	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,

Loc. No.	Code No.	Description ; Specification	Remark
.....6 C120	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
.....6 C120	2203-000626	C-CERAMIC,CHIP;0.022NF,5%,50V,C0G,TP,160	
.....6 C120	2203-000626	C-CERAMIC,CHIP;0.022NF,5%,50V,C0G,TP,160	
.....6 C120	2203-000681	C-CERAMIC,CHIP;0.027NF,5%,50V,C0G,TP,160	
.....6 C120	2203-000681	C-CERAMIC,CHIP;0.027NF,5%,50V,C0G,TP,160	
.....6 C120	2203-000681	C-CERAMIC,CHIP;0.027NF,5%,50V,C0G,TP,160	
.....6 C120	2203-000783	C-CERAMIC,CHIP;0.33NF,5%,50V,C0G,TP,1608	
.....6 C120	2203-000783	C-CERAMIC,CHIP;0.33NF,5%,50V,C0G,TP,1608	
.....6 C120	2203-000783	C-CERAMIC,CHIP;0.33NF,5%,50V,C0G,TP,1608	
.....6 C120	2203-000783	C-CERAMIC,CHIP;0.33NF,5%,50V,C0G,TP,1608	
.....6 C120	2203-000783	C-CERAMIC,CHIP;0.33NF,5%,50V,C0G,TP,1608	
.....6 C120	2203-000896	C-CERAMIC,CHIP;4.7nF,10%,50V,X7R,TP,1608	
.....6 C120	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....6 C120	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....6 C120	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....6 C120	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....6 C120	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....6 C120	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....6 C120	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....6 C120	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....6 C120	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....6 C120	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....6 C120	2203-000998	C-CERAMIC,CHIP;0.047NF,5%,50V,C0G,TP,160	
.....6 C120	2203-000998	C-CERAMIC,CHIP;0.047NF,5%,50V,C0G,TP,160	
.....6 C120	2203-000998	C-CERAMIC,CHIP;0.047NF,5%,50V,C0G,TP,160	
.....6 C120	2203-000998	C-CERAMIC,CHIP;0.047NF,5%,50V,C0G,TP,160	
.....6 C120	2203-001140	C-CERAMIC,CHIP;68nF,10%,16V,X7R,TP,1608,	
.....6 C120	2203-001222	C-CERAMIC,CHIP;820pF,10%,50V,X7R,TP,1608	
.....6 C120	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.....6 C120	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.....6 C120	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.....6 C120	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.....6 C120	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.....6 C120	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.....6 C120	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.....6 C120	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.....6 C120	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.....6 C120	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.....6 C120	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.....6 C120	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.....6 C120	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.....6 C120	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.....6 C120	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.....6 C120	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.....6 C120	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.....6 C120	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.....6 C120	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.....6 C120	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.....6 C120	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.....6 C120	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.....6 C120	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.....6 C120	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.....6 C120	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.....6 C120	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.....6 C120	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.....6 C120	2203-005384	C-CERAMIC,CHIP;4700nF,+80-20%,10V,Y5V,TP	
.....6 C120	2203-005384	C-CERAMIC,CHIP;4700nF,+80-20%,10V,Y5V,TP	
.....6 C120	2203-005384	C-CERAMIC,CHIP;4700nF,+80-20%,10V,Y5V,TP	
.....6 C120	2203-005809	C-CERAMIC,CHIP;1000nF,10%,16V,X7R,TP,201	
.....6 FC09	2402-000170	C-AL,SMD;1uF,20%,50V,GP,TP,4.3x4.3x5.4,	
.....6 PC18	2402-000173	C-AL,SMD;4.7uF,20%,35V,GP,TP,4.3x4.3x5.	
.....6 FC60	2402-000173	C-AL,SMD;4.7uF,20%,35V,GP,TP,4.3x4.3x5.	
.....6 FC29	2402-000173	C-AL,SMD;4.7uF,20%,35V,GP,TP,4.3x4.3x5.	
.....6 FC13	2402-000173	C-AL,SMD;4.7uF,20%,35V,GP,TP,4.3x4.3x5.	
.....6 SC38	2402-000179	C-AL,SMD;47uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....6 SC36	2402-000179	C-AL,SMD;47uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....6 SC34	2402-000179	C-AL,SMD;47uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....6 SC40	2402-000179	C-AL,SMD;47uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....6 SC42	2402-000179	C-AL,SMD;47uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....6 SC44	2402-000179	C-AL,SMD;47uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....6 SC47	2402-000179	C-AL,SMD;47uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....6 SC31	2402-000179	C-AL,SMD;47uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....6 PC01	2402-000179	C-AL,SMD;47uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....6 PC03	2402-000179	C-AL,SMD;47uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....6 PC06	2402-000179	C-AL,SMD;47uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....6 PC32	2402-000179	C-AL,SMD;47uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....6 SC18	2402-000179	C-AL,SMD;47uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....6 SC16	2402-000179	C-AL,SMD;47uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....6 SC11	2402-000179	C-AL,SMD;47uF,20%,16V,GP,TP,6.6x6.6x5.4	

Loc. No.	Code No.	Description ; Specification	Remark
.....6 FC63	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....6 FC62	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....6 FC45	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....6 FC12	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....6 FC04	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....6 PC12	2402-001049	C-AL,CHIP;10uF,20%,16V,GP,TP,3.3x3.3x5.4	
.....6 PC10	2402-001049	C-AL,CHIP;10uF,20%,16V,GP,TP,3.3x3.3x5.4	
.....6 PC09	2402-001049	C-AL,CHIP;10uF,20%,16V,GP,TP,3.3x3.3x5.4	
.....6 FC65	2402-001049	C-AL,CHIP;10uF,20%,16V,GP,TP,3.3x3.3x5.4	
.....6 FC06	2402-001049	C-AL,CHIP;10uF,20%,16V,GP,TP,3.3x3.3x5.4	
.....6 PC08	2402-001070	C-AL,SMD;470uF,20%,16V,GP,TP,10x10.2,-	
.....6 PC07	2402-001070	C-AL,SMD;470uF,20%,16V,GP,TP,10x10.2,-	
.....6 FC31	2402-001070	C-AL,SMD;470uF,20%,16V,GP,TP,10x10.2,-	
.....6 CC49	2402-001070	C-AL,SMD;470uF,20%,16V,GP,TP,10x10.2,-	
.....6 EL05	2703-000274	INDUCTOR-SMD;2.2uH,10%,1.25x2x0.85mm	
.....6 EL06	2703-000274	INDUCTOR-SMD;2.2uH,10%,1.25x2x0.85mm	
.....6 EL07	2703-000274	INDUCTOR-SMD;2.2uH,10%,1.25x2x0.85mm	
.....6 EL08	2703-000274	INDUCTOR-SMD;2.2uH,10%,1.25x2x0.85mm	
.....6 EL01	2703-000274	INDUCTOR-SMD;2.2uH,10%,1.25x2x0.85mm	
.....6 EL02	2703-000274	INDUCTOR-SMD;2.2uH,10%,1.25x2x0.85mm	
.....6 EL03	2703-000274	INDUCTOR-SMD;2.2uH,10%,1.25x2x0.85mm	
.....6 EL04	2703-000274	INDUCTOR-SMD;2.2uH,10%,1.25x2x0.85mm	
.....6 FL01	2703-001070	INDUCTOR-SMD;100uH,10%,4.5x3.2x3.2mm	
.....6 G101	3301-001082	CORE-FERRITE BEAD;AB,60OHM,3.2X2.5X1.3MM	
.....6 G101	3301-001186	CORE-FERRITE BEAD;AB,600ohm,3.2x1.6x1.3m	
.....6 G101	3301-001186	CORE-FERRITE BEAD;AB,600ohm,3.2x1.6x1.3m	
.....6 G101	3301-001186	CORE-FERRITE BEAD;AB,600ohm,3.2x1.6x1.3m	
.....6 G101	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.....6 G101	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.....6 G101	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.....6 G101	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.....6 G101	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.....6 G101	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.....6 G101	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.....6 G101	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.....6 CR27	2007-000033	R-CHIP;0ohm,5%,1/4W,TP,3216	
.....6 0	AA41-00610E	PCB;HCM4215W,PCB,4L,E,1.6,162*223,140*10	S.N.A
.....6	0202-001167	SOLDER-CREAM;RX3603-2330HO,S45A,PASTE,SN	S.N.A
....4 T0093	BP95-00146C	ASSY SUB PCB-CONV MOD;,P55A,CG MOD	
.....5	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
.....5 L01	2701-001030	INDUCTOR-AXIAL;43uH,10%,5x14mm	
.....5 CN01	3703-001124	CONNECTOR-BACK PANEL;32P,2R,MALE,ANGLE,A	
.....5 CN906	3711-003601	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,ANGLE,	
.....5	BP97-00513D	ASSY SMD;,P55A,CG MOD	S.N.A
.....6 D13	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....6 D12	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....6 D11	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....6 D10	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....6 D14	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....6 D15	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....6 D16	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....6 D17	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....6 D18	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....6 D01	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....6 D02	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....6 D03	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....6 D04	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....6 D05	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....6 D09	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....6 D08	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....6 D07	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....6 D06	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....6 DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
.....6 DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
.....6 DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
.....6 Q02	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.....6 Q03	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.....6 Q10	0501-000342	TR-SMALL SIGNAL;KSC1623-Y,NPN,200mW,SOT-	
.....6 Q04	0501-000342	TR-SMALL SIGNAL;KSC1623-Y,NPN,200mW,SOT-	
.....6 Q409	0505-000110	FET-SILICON;2N7002,N,60V,115MA,7.5OHM,0.	
.....6 Q409	0505-000110	FET-SILICON;2N7002,N,60V,115MA,7.5OHM,0.	
.....6 Q409	0505-000110	FET-SILICON;2N7002,N,60V,115MA,7.5OHM,0.	
.....6 IC104	0801-002345	IC-CMOS LOGIC;7S04,INVERTER,SOT-353,5P,4	
.....6 IC104	0801-002345	IC-CMOS LOGIC;7S04,INVERTER,SOT-353,5P,4	
.....6 IC104	0801-002345	IC-CMOS LOGIC;7S04,INVERTER,SOT-353,5P,4	
.....6 IC08	1001-000164	IC-ANALOG MULTIPLEX;74HC4052,CMOS,SOP,16	

Loc. No.	Code No.	Description ; Specification	Remark
.....6 IC13	1001-001155	IC-ANALOG MULTIPLEX;NC7SB3157P6X,CMOS,SC	
.....6 IC112	1103-001195	IC-EEPROM;24C64,8Kx8Bit,SOP,8P,150MIL,10	
.....6 DU410	1201-001135	IC-OP AMP;324,SOP,ST,14P,150MIL,QUAD,100	
.....6 DU410	1201-001504	IC-OP AMP;072,SOP,8P,150MIL,DUAL,-,PLAST	
.....6 DU410	1201-001504	IC-OP AMP;072,SOP,8P,150MIL,DUAL,-,PLAST	
.....6 DU410	1201-001504	IC-OP AMP;072,SOP,8P,150MIL,DUAL,-,PLAST	
.....6 DU410	1201-001504	IC-OP AMP;072,SOP,8P,150MIL,DUAL,-,PLAST	
.....6 T0074	1201-001520	IC-VIDEO AMP;EL2250CS,SOIC,8P,150MIL,DUA	
.....6 IC03	1203-001824	IC-VOL. DETECTOR;7042,SOT-89,3P,-,PLASTI	
.....6 T0087	1203-002302	IC-POSI.FIXED REG.;78RM33D,D-PAK,3P,-,PL	
.....6 IC17	1209-001163	IC-PLL;TLC2932IPWLE,SOP,14P,-,PLASTIC	
.....6 R36	2007-000028	R-CHIP;39ohm,5%,1/8W,TP,2012	
.....6 R35	2007-000028	R-CHIP;39ohm,5%,1/8W,TP,2012	
.....6 R31	2007-000028	R-CHIP;39ohm,5%,1/8W,TP,2012	
.....6 R30	2007-000028	R-CHIP;39ohm,5%,1/8W,TP,2012	
.....6 R143	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 R144	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 R25	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 R122	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 R123	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 R141	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 R136	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....6 R15	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....6 R24	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....6 R45	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....6 R46	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....6 R09	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....6 R10	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....6 R129	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....6 R134	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....6 R135	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....6 R59	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R65	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R71	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R77	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R91	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R53	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R02	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R16	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R17	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R20	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R47	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R62	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R64	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R68	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R58	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R56	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R52	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R70	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R98	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R94	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R82	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R80	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R76	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R74	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R38	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R37	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R110	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R11	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R101	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R03	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R39	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R50	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R44	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R43	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R42	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R41	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R40	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R128	2007-000079	R-CHIP;1.8Kohm,5%,1/10W,TP,1608	
.....6 R81	2007-000080	R-CHIP;2Kohm,5%,1/10W,TP,1608	
.....6 R75	2007-000080	R-CHIP;2Kohm,5%,1/10W,TP,1608	
.....6 R69	2007-000080	R-CHIP;2Kohm,5%,1/10W,TP,1608	
.....6 R51	2007-000080	R-CHIP;2Kohm,5%,1/10W,TP,1608	
.....6 R57	2007-000080	R-CHIP;2Kohm,5%,1/10W,TP,1608	
.....6 R63	2007-000080	R-CHIP;2Kohm,5%,1/10W,TP,1608	
.....6 R109	2007-000082	R-CHIP;3.3Kohm,5%,1/10W,TP,1608	
.....6 R66	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
.....6 R61	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6 R60	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6 R55	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6 R54	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6 R79	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6 R78	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6 R73	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6 R72	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6 R67	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6 R49	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6 R08	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6 R07	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6 R06	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6 R04	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6 R01	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6 R48	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6 R133	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6 R121	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6 R119	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6 R118	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6 R86	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....6 R92	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....6 R93	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....6 R96	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....6 R97	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....6 R85	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....6 R113	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....6 R114	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....6 R115	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....6 R83	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....6 R84	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....6 R125	2007-000091	R-CHIP;12Kohm,5%,1/10W,TP,1608	
.....6 R05	2007-000102	R-CHIP;100Kohm,5%,1/10W,TP,1608	
.....6 R127	2007-000109	R-CHIP;1Mohm,5%,1/10W,TP,1608	
.....6 R100	2007-000118	R-CHIP;390ohm,5%,1/10W,TP,1608	
.....6 R32	2007-000119	R-CHIP;560ohm,5%,1/10W,TP,1608	
.....6 R34	2007-000122	R-CHIP;1.2Kohm,5%,1/10W,TP,1608	
.....6 R29	2007-000122	R-CHIP;1.2Kohm,5%,1/10W,TP,1608	
.....6 R28	2007-000122	R-CHIP;1.2Kohm,5%,1/10W,TP,1608	
.....6 R117	2007-000122	R-CHIP;1.2Kohm,5%,1/10W,TP,1608	
.....6 R107	2007-000122	R-CHIP;1.2Kohm,5%,1/10W,TP,1608	
.....6 R33	2007-000124	R-CHIP;2.2Kohm,5%,1/10W,TP,1608	
.....6 R120	2007-000124	R-CHIP;2.2Kohm,5%,1/10W,TP,1608	
.....6 R90	2007-000133	R-CHIP;330Kohm,5%,1/10W,TP,1608	
.....6 R89	2007-000133	R-CHIP;330Kohm,5%,1/10W,TP,1608	
.....6 R88	2007-000133	R-CHIP;330Kohm,5%,1/10W,TP,1608	
.....6 R87	2007-000133	R-CHIP;330Kohm,5%,1/10W,TP,1608	
.....6 R108	2007-000381	R-CHIP;13Kohm,5%,1/10W,TP,1608	
.....6 R139	2007-000402	R-CHIP;150ohm,5%,1/10W,TP,1608	
.....6 R138	2007-000402	R-CHIP;150ohm,5%,1/10W,TP,1608	
.....6 R137	2007-000402	R-CHIP;150ohm,5%,1/10W,TP,1608	
.....6 R99	2007-000704	R-CHIP;3.6Kohm,5%,1/16W,DA,TP,1608	
.....6 R95	2007-000704	R-CHIP;3.6Kohm,5%,1/16W,DA,TP,1608	
.....6 R126	2007-000857	R-CHIP;4.3Kohm,1%,1/16W,DA,TP,1608	
.....6 R27	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 R26	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 R116	2007-001179	R-CHIP;8.2Kohm,5%,1/10W,TP,1608	
.....6 RN04	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....6 RN05	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....6 RN06	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....6 RN01	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....6 RN02	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....6 RN03	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....6 C120	2203-000041	C-CERAMIC,CHIP;0.01NF,0.25PF,50V,C0G,TP,	
.....6 C120	2203-000041	C-CERAMIC,CHIP;0.01NF,0.25PF,50V,C0G,TP,	
.....6 C120	2203-000041	C-CERAMIC,CHIP;0.01NF,0.25PF,50V,C0G,TP,	
.....6 C120	2203-000041	C-CERAMIC,CHIP;0.01NF,0.25PF,50V,C0G,TP,	
.....6 C120	2203-000041	C-CERAMIC,CHIP;0.01NF,0.25PF,50V,C0G,TP,	
.....6 C120	2203-000041	C-CERAMIC,CHIP;0.01NF,0.25PF,50V,C0G,TP,	
.....6 C120	2203-000041	C-CERAMIC,CHIP;0.01NF,0.25PF,50V,C0G,TP,	
.....6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	

Loc. No.	Code No.	Description ; Specification	Remark
.....6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 C701	2401-000025	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
.....5 C701	2401-000025	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
.....5 C701	2401-000025	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
.....5 C701	2401-000039	C-AL;1000uF,20%,16V,GP,TP,10x16,5	
.....5 C701	2401-000039	C-AL;1000uF,20%,16V,GP,TP,10x16,5	
.....5 C701	2401-000192	C-AL;1000uF,20%,50V,GP,TP,16x25,7.5	
.....5 C701	2401-000192	C-AL;1000uF,20%,50V,GP,TP,16x25,7.5	
.....5 C701	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
.....5 C701	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
.....5 C701	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
.....5 C701	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
.....5 C701	2401-000471	C-AL;10uF,20%,50V,BP,TP,5x11,5mm	
.....5 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000603	C-AL;1UF,20%,50V,GP,TP,5X11,2	
.....5 C701	2401-000603	C-AL;1UF,20%,50V,GP,TP,5X11,2	
.....5 C701	2401-000603	C-AL;1UF,20%,50V,GP,TP,5X11,2	
.....5 C701	2401-000603	C-AL;1UF,20%,50V,GP,TP,5X11,2	
.....5 C701	2401-000603	C-AL;1UF,20%,50V,GP,TP,5X11,2	
.....5 C701	2401-000832	C-AL;220uF,20%,25V,GP,TP,8x11.5,5	
.....5 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-001192	C-AL;33uF,20%,50V,GP,TP,6.3x11,5	
.....5 C701	2401-001397	C-AL;470uF,20%,25V,GP,TP,10x16,5	
.....5 C701	2401-001513	C-AL;47uF,20%,16V,WT,TP,5x11,5	
.....5 C701	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
.....5 C701	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
.....5 C701	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
.....5 C701	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
.....5 C701	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
.....5 C701	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
.....5 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
.....5 C701	2401-002300	C-AL;47uF,20%,50V,GP,TP,6.3x11,5	
.....5 C701	2401-002300	C-AL;47uF,20%,50V,GP,TP,6.3x11,5	
.....5 C701	2401-002459	C-AL;220uF,20%,25V,LZ,TP,10x16,5	
.....5 C701	2401-002459	C-AL;220uF,20%,25V,LZ,TP,10x16,5	
.....5 C701	2401-002459	C-AL;220uF,20%,25V,LZ,TP,10x16,5	
.....5 C701	2401-002459	C-AL;220uF,20%,25V,LZ,TP,10x16,5	
.....5 C701	2401-002459	C-AL;220uF,20%,25V,LZ,TP,10x16,5	
.....5 C701	2401-002459	C-AL;220uF,20%,25V,LZ,TP,10x16,5	
.....5 C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
.....5 C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
.....5 C701	2401-002594	C-AL;220uF,20%,16V,GP,TP,8x11.5,5	
.....5 C701	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
.....5 C701	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
.....5 C701	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
.....5 C701	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
.....5 C701	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 L105	2701-000106	INDUCTOR-AXIAL;1.5uH,10%,3x7mm	
.....5 L119	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
.....5 L120	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
.....5 L121	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
.....5 L122	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
.....5 L123	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
.....5 L124	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
.....5 L107	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
.....5 L108	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
.....5 L111	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
.....5 L114	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
.....5 L113	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
.....5 L112	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
.....5 L703	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
.....5 L106	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
.....5 L104	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
.....5 L103	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
.....5 L101	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
.....5 L706	2701-001030	INDUCTOR-AXIAL;43uH,10%,5x14mm	
.....5 L705	2701-001030	INDUCTOR-AXIAL;43uH,10%,5x14mm	
.....5 L102	2701-001040	INDUCTOR-AXIAL;10uH,10%,4.5x14mm	
.....5 G101	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
.....5 G101	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
.....5 G101	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
.....5 CN906	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
.....5 CN906	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
.....5 CN906	3711-002643	CONNECTOR-HEADER;BOX,4P,1R,2.5mm,STRAIGH	
.....5 CN906	3711-002645	CONNECTOR-HEADER;BOX,6P,1R,2.5mm,STRAIGH	
.....5 GT01	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT02	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT03	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5	BP97-00513Q	ASSY SMD;HCN4226WX/XAA,P55A	S.N.A
.....6 DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
.....6 DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
.....6 DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
.....6 DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
.....6 DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
.....6 DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
.....6 DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
.....6 DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
.....6 DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
.....6 DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
.....6 DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
.....6 DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
.....6 DZ016	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
.....6 DZ016	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
.....6 DZ016	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
.....6 Q703	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....6 Q704	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....6 Q707	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....6 Q708	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....6 Q709	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....6 Q710	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....6 Q101	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....6 Q103	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....6 Q106	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....6 IC106	1001-001177	IC-VIDEO SWITCH;TEA6425D,VIDEO SWITCH ,S	
.....6 IC106	1001-001177	IC-VIDEO SWITCH;TEA6425D,VIDEO SWITCH ,S	
.....6 IC605	1001-001178	IC-AUDIO SWITCH;TEA6422D,AUDIO SWITCH ,S	
.....6 IC704	1002-001048	IC-A/D&D/A CONVERTER;PCF8591T,8BIT,SOP,1	
.....6 IC705	1002-001048	IC-A/D&D/A CONVERTER;PCF8591T,8BIT,SOP,1	
.....6 DU410	1201-000541	IC-OP AMP;062,SOP,8P,153MIL,DUAL,6V/mV,P	
.....6 IC602	1204-002002	IC-SOUND PROCESSOR;MSP3420G-B11,PQFP,80P	
.....6 R789	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 R788	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 R777	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 R776	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 R775	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 R791	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 R97C	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 R904	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 R79B	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 R795	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 R794	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 R729	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 R145	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 R143	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
.....6 R117	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 R101	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 R712	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 R708	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 R706	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 R148	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 R646	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R647	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R703	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R627	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R626	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R625	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R624	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R707	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R773	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R772	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R757	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R756	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R724	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R722	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R709	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R602	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R115	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R114	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R113	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R108	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R107	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R103	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R102	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R116	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R601	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R172	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R171	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R170	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R127	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R126	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R125	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R730	2007-000076	R-CHIP;330ohm,5%,1/10W,TP,1608	
.....6 R166	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
.....6 R150	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
.....6 R157	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
.....6 R652	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R651	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R643	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R642	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R641	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R653	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R798	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R797	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R793	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R728	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R637	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R630	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R629	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R628	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R603	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R106	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R631	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R636	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R635	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R634	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R633	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R632	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R755	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6 R771	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6 R774	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6 R780	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6 R604	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6 R611	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6 R688	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6 R750	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6 R749	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....6 R748	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....6 R747	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....6 R746	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....6 R744	2007-000093	R-CHIP;20Kohm,5%,1/10W,TP,1608	
.....6 R743	2007-000093	R-CHIP;20Kohm,5%,1/10W,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
.....6 R741	2007-000093	R-CHIP;20Kohm,5%,1/10W,TP,1608	
.....6 R739	2007-000093	R-CHIP;20Kohm,5%,1/10W,TP,1608	
.....6 R164	2007-000094	R-CHIP;22Kohm,5%,1/10W,TP,1608	
.....6 R165	2007-000094	R-CHIP;22Kohm,5%,1/10W,TP,1608	
.....6 R149	2007-000094	R-CHIP;22Kohm,5%,1/10W,TP,1608	
.....6 R151	2007-000094	R-CHIP;22Kohm,5%,1/10W,TP,1608	
.....6 R155	2007-000094	R-CHIP;22Kohm,5%,1/10W,TP,1608	
.....6 R156	2007-000094	R-CHIP;22Kohm,5%,1/10W,TP,1608	
.....6 R716	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	
.....6 R704	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	
.....6 R110	2007-000098	R-CHIP;56Kohm,5%,1/10W,TP,1608	
.....6 R105	2007-000098	R-CHIP;56Kohm,5%,1/10W,TP,1608	
.....6 R762	2007-000127	R-CHIP;9.1Kohm,5%,1/10W,TP,1608	
.....6 R745	2007-000127	R-CHIP;9.1Kohm,5%,1/10W,TP,1608	
.....6 R742	2007-000127	R-CHIP;9.1Kohm,5%,1/10W,TP,1608	
.....6 R740	2007-000127	R-CHIP;9.1Kohm,5%,1/10W,TP,1608	
.....6 R738	2007-000127	R-CHIP;9.1Kohm,5%,1/10W,TP,1608	
.....6 R612	2007-000134	R-CHIP;33Kohm,5%,1/10W,TP,1608	
.....6 R607	2007-000134	R-CHIP;33Kohm,5%,1/10W,TP,1608	
.....6 R609	2007-000329	R-CHIP;11Kohm,5%,1/10W,TP,1608	
.....6 R608	2007-000329	R-CHIP;11Kohm,5%,1/10W,TP,1608	
.....6 R109	2007-000828	R-CHIP;39Kohm,1%,1/16W,DA,TP,1608	
.....6 R104	2007-000828	R-CHIP;39Kohm,1%,1/16W,DA,TP,1608	
.....6 R767	2007-001010	R-CHIP;51Kohm,5%,1/10W,TP,1608	
.....6 R754	2007-001010	R-CHIP;51Kohm,5%,1/10W,TP,1608	
.....6 R753	2007-001010	R-CHIP;51Kohm,5%,1/10W,TP,1608	
.....6 R752	2007-001010	R-CHIP;51Kohm,5%,1/10W,TP,1608	
.....6 R605	2007-001010	R-CHIP;51Kohm,5%,1/10W,TP,1608	
.....6 R610	2007-001010	R-CHIP;51Kohm,5%,1/10W,TP,1608	
.....6 R751	2007-001010	R-CHIP;51Kohm,5%,1/10W,TP,1608	
.....6 R713	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 R710	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 R702	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 R701	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 R174	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 R173	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 R714	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 R799	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 R792	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 R731	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 R727	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 R726	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 R725	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 R133	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 R132	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 R121	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 R120	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 R119	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 R118	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 R134	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 R142	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 R140	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 R138	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 R137	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 R613	2007-001179	R-CHIP;8.2Kohm,5%,1/10W,TP,1608	
.....6 R606	2007-001179	R-CHIP;8.2Kohm,5%,1/10W,TP,1608	
.....6 C120	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
.....6 C120	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
.....6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6 C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....6 C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....6 C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....6 C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....6 C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....6 C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....6 C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....6 C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....6 C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....6 C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....6 C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	

Loc. No.	Code No.	Description ; Specification	Remark
.....6 C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....6 C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....6 C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....6 C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....6 C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....6 C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....6 C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....6 C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....6 C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....6 C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....6 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....6 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....6 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....6 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....6 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....6 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....6 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....6 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....6 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....6 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....6 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....6 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....6 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....6 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....6 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....6 C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.....6 C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.....6 C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.....6 C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.....6 C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.....6 C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.....6 C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.....6 C120	2203-000332	C-CERAMIC,CHIP;0.012NF,5%,50V,C0G,TP,160	
.....6 C120	2203-000332	C-CERAMIC,CHIP;0.012NF,5%,50V,C0G,TP,160	
.....6 C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....6 C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....6 C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....6 C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....6 C120	2203-001071	C-CERAMIC,CHIP;0.056NF,5%,50V,C0G,TP,160	
.....6 C120	2203-001071	C-CERAMIC,CHIP;0.056NF,5%,50V,C0G,TP,160	
.....6 C120	2203-001071	C-CERAMIC,CHIP;0.056NF,5%,50V,C0G,TP,160	
.....6 C120	2203-001211	C-CERAMIC,CHIP;8.2nF,10%,50V,X7R,TP,1608	
.....6 C120	2203-001211	C-CERAMIC,CHIP;8.2nF,10%,50V,X7R,TP,1608	
.....6 C120	2203-001211	C-CERAMIC,CHIP;8.2nF,10%,50V,X7R,TP,1608	
.....6 C120	2203-001211	C-CERAMIC,CHIP;8.2nF,10%,50V,X7R,TP,1608	
.....6 C120	2203-001652	C-CERAMIC,CHIP;470nF,+80-20%,16V,Y5V,TP,	
.....6 C120	2203-001652	C-CERAMIC,CHIP;470nF,+80-20%,16V,Y5V,TP,	
.....6 C120	2203-001652	C-CERAMIC,CHIP;470nF,+80-20%,16V,Y5V,TP,	
.....6 C120	2203-001652	C-CERAMIC,CHIP;470nF,+80-20%,16V,Y5V,TP,	
.....6 C120	2203-001652	C-CERAMIC,CHIP;470nF,+80-20%,16V,Y5V,TP,	
.....6 C120	2203-001652	C-CERAMIC,CHIP;470nF,+80-20%,16V,Y5V,TP,	
.....6 C120	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
.....6 C120	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
.....6 C120	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
.....6 C120	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
.....6 C120	2203-005590	C-CERAMIC,CHIP;330NF,10%,16V,X7R,TP,2012	
.....6 L701	2703-000398	INDUCTOR-SMD;10uH,10%,3.2x2.5x2.2mm	
.....6 L707	2703-000398	INDUCTOR-SMD;10uH,10%,3.2x2.5x2.2mm	
.....6 L708	2703-000398	INDUCTOR-SMD;10uH,10%,3.2x2.5x2.2mm	
.....6 L901	2703-000398	INDUCTOR-SMD;10uH,10%,3.2x2.5x2.2mm	
.....6 L902	2703-000398	INDUCTOR-SMD;10uH,10%,3.2x2.5x2.2mm	
.....6 L604	2703-000398	INDUCTOR-SMD;10uH,10%,3.2x2.5x2.2mm	
.....6 L125	2703-000398	INDUCTOR-SMD;10uH,10%,3.2x2.5x2.2mm	
.....6 L126	2703-000398	INDUCTOR-SMD;10uH,10%,3.2x2.5x2.2mm	
.....6 L601	2703-000398	INDUCTOR-SMD;10uH,10%,3.2x2.5x2.2mm	
.....6 L602	2703-000398	INDUCTOR-SMD;10uH,10%,3.2x2.5x2.2mm	
.....6 L603	2703-000398	INDUCTOR-SMD;10uH,10%,3.2x2.5x2.2mm	
.....6 G101	3301-001324	CORE-FERRITE BEAD;AB,150HM,2X1.25X0.9MM,	
.....6 PCB	AA41-00597F	PCB-MAIN;HCM4215W,FR-4,2L,F,1.6T,245X245	S.N.A
.....6	0202-001167	SOLDER-CREAM;RX3603-2330HO,S45A,PASTE,SNS	N.A
..2 T0094	BP94-00155A	ASSY PCB MISC-CG-AMP;DP,HCM4215W3S/XAA,P	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3 CN906	3711-003043	CONNECTOR-HEADER;BOX,4P,1R,2.5MM,STRAIGH	
...3 CN906	3711-003043	CONNECTOR-HEADER;BOX,4P,1R,2.5MM,STRAIGH	
...3 CN906	3711-003043	CONNECTOR-HEADER;BOX,4P,1R,2.5MM,STRAIGH	

Loc. No.	Code No.	Description ; Specification	Remark
...3 CN906	3711-003043	CONNECTOR-HEADER;BOX,4P,1R,2.5MM,STRAIGH	
...3 CN906	3711-003046	CONNECTOR-HEADER;BOX,9P,1R,2.5MM,STRAIGH	
...3	AA65-30110A	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,	S.N.A
...3	AA97-07418A	ASSY AUTO;HCM4215WX/XAA,P55A	S.N.A
....4 R125	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ109	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RZ108	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RZ107	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RZ106	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RZ105	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RZ104	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R857	2001-001155	R-CARBON(S);5.6KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R856	2001-001155	R-CARBON(S);5.6KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 RZ142	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ143	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ144	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ145	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ146	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ147	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ123	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ124	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ125	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ128	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ127	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ126	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ132	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ132A	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ148	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ148A	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ149	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ149A	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ129	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ129A	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ130	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ131A	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ131	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ130A	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RFZ50	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
....4 RFZ51	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
....4 RFZ52	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
....4 RFZ53	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
....4 RFZ19	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
....4 RFZ20	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
....4 RFZ21	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
....4 RFZ22	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
....4 C598	2201-000327	C-CERAMIC,DISC;2.2NF,10%,50V,Y5V,TP,6.5X	
....4 C598	2201-000327	C-CERAMIC,DISC;2.2NF,10%,50V,Y5V,TP,6.5X	
....4 C598	2201-000327	C-CERAMIC,DISC;2.2NF,10%,50V,Y5V,TP,6.5X	
....4 C598	2201-000327	C-CERAMIC,DISC;2.2NF,10%,50V,Y5V,TP,6.5X	
....4 C689	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
....4 C689	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
....4 C689	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
....4 C689	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
....4 C689	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
....4 C689	2202-000205	C-CERAMIC,MLC-AXIAL;22pF,5%,50V,SL,TP,1.	
....4 C689	2202-000205	C-CERAMIC,MLC-AXIAL;22pF,5%,50V,SL,TP,1.	
....4 C689	2202-000205	C-CERAMIC,MLC-AXIAL;22pF,5%,50V,SL,TP,1.	
....4 C689	2202-000205	C-CERAMIC,MLC-AXIAL;22pF,5%,50V,SL,TP,1.	
....4 C689	2202-000205	C-CERAMIC,MLC-AXIAL;22pF,5%,50V,SL,TP,1.	
....4 CZ113	2202-000561	C-CERAMIC,MLC-RADIAL;0.68NF,5%,50V,C0G,T	

Loc. No.		Code No.	Description ; Specification	Remark
....4	CZ114	2202-000561	C-CERAMIC,MLC-RADIAL;0.68NF,5%,50V,C0G,T	
....4	C701	2401-000183	C-AL;1000uF,20%,35V,WT,TP,12.5x25,5	
....4	C701	2401-000183	C-AL;1000uF,20%,35V,WT,TP,12.5x25,5	
....4	C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4	C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4	LZ112	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
....4	LZ111	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
....4	LZ110	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
....4	LZ109	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
....4	LZ108	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
....4	LZ107	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
⚠ 4	FD102S	3601-001065	FUSE-AXIAL LEAD;125V,3.5A,FAST-ACTING,CE	
⚠ 4	FD101S	3601-001065	FUSE-AXIAL LEAD;125V,3.5A,FAST-ACTING,CE	
....4	ELZ01	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	ELZ02	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	ELZ03	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4	C689	2202-000825	C-CERAMIC,MLC-AXIAL;680pF,10%,50V,Y5P,TP	
....4	C689	2202-000825	C-CERAMIC,MLC-AXIAL;680pF,10%,50V,Y5P,TP	
....4	C689	2202-000825	C-CERAMIC,MLC-AXIAL;680pF,10%,50V,Y5P,TP	
....4	C689	2202-000825	C-CERAMIC,MLC-AXIAL;680pF,10%,50V,Y5P,TP	
....4	C689	2202-000825	C-CERAMIC,MLC-AXIAL;680pF,10%,50V,Y5P,TP	
....4	C689	2202-000863	C-CERAMIC,MLC-AXIAL;560pF,10%,50V,Y5P,TP	
....4	C689	2202-000863	C-CERAMIC,MLC-AXIAL;560pF,10%,50V,Y5P,TP	
....4	C689	2202-000863	C-CERAMIC,MLC-AXIAL;560pF,10%,50V,Y5P,TP	
....4	C689	2202-000863	C-CERAMIC,MLC-AXIAL;560pF,10%,50V,Y5P,TP	
....4	C689	2202-000863	C-CERAMIC,MLC-AXIAL;560pF,10%,50V,Y5P,TP	
....4	C689	2202-000863	C-CERAMIC,MLC-AXIAL;560pF,10%,50V,Y5P,TP	
....4	R125	2001-000800	R-CARBON;5.1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	0	AA41-00601C	PCB;HCM4215W,PCB,CEM-1,1L,C,1.6,245X245,	S.N.A
....4	SGZ101	4715-000106	SURGE ABSORBER;300V,210-390V,-,-,AXIAL	S.N.A
...3	T0076	BP39-00005A	LEAD CONNECTOR-ASSY;P55A/HCM4215W,UL2547	
...3	T0076	BP39-00015A	LEAD CONNECTOR-ASSY;P55A/HCM4215W,UL1185	
...3		BP61-00076A	HOLDER-PUSH,A;42W5,NYLON6.6,NATURAL	S.N.A
...3		BP61-00077A	HOLDER-PUSH,B;42W5,NYLON6.6,NATURAL	S.N.A
...3	CZ101	BP96-00005A	ASSY HEAT SINK P;BP62-00002A,SCREW,STK39	S.N.A
....4	T0081	6003-001021	SCREW-TAPTITE;RH,+,B,M3,L15,ZPC(YEL),SWR	S.N.A
....4	CIS	BP62-00002A	HEAT SINK;COMMANDO,A1050P,T2.0,W62.0,H14	S.N.A
....4	CIS	BP62-00008A	HEAT SINK;COMMANDO CG AMP,AL6063,T2.0,W	S.N.A
....4	CIS	BP73-00002A	SILICON/RUBBER;COMMANDO CG AMP,SILICON	,.N.A
....4	T0074	1201-001225	IC-VIDEO AMP;392,SIP,22P,-,TRIPLE,-,PLAS	
..2	T0099	BP94-00234A	ASSY PCB MISC-CRT;DP,HCM4215W3S/XAA,P55A	
...3		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3	VR561	2101-000321	VR-ROTARY;1Mohm,-,0.6W,SIDE	
...3	VR531	2101-000321	VR-ROTARY;1Mohm,-,0.6W,SIDE	
...3	VR501	2101-000321	VR-ROTARY;1Mohm,-,0.6W,SIDE	
...3	T0121	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
...3	V561	3704-001019	SOCKET-CRT;10P,29.1PI,35.5PI,AU30U,-	
...3	V531	3704-001019	SOCKET-CRT;10P,29.1PI,35.5PI,AU30U,-	
...3	V501	3704-001019	SOCKET-CRT;10P,29.1PI,35.5PI,AU30U,-	
...3	CN906	3711-002645	CONNECTOR-HEADER;BOX,6P,1R,2.5mm,STRAIGH	
...3	CN906	3711-002648	CONNECTOR-HEADER;BOX,9P,1R,2.5mm,STRAIGH	
...3	CN906	3711-003052	CONNECTOR-HEADER;BOX,10P,1R,2.5MM,STRAIG	
...3	CN906	3711-003052	CONNECTOR-HEADER;BOX,10P,1R,2.5MM,STRAIG	
...3	CN906	3711-003973	CONNECTOR-HEADER;BOX,11P,1R,2.5mm,STRAIG	
...3	CN906	3711-003973	CONNECTOR-HEADER;BOX,11P,1R,2.5mm,STRAIG	
...3	SG301	4715-001050	SURGE ABSORBER;2.4kV,20%,1500A,-,DISC-RA	
...3	SG562	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm MIN,	
...3	SG532	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm MIN,	
...3	SG502	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm MIN,	
...3	T0076	AA39-00112A	LEAD CONNECTOR-ASSY;,UL1007#26,UL/CSA,10	
...3	T0076	AA39-00120F	LEAD CONNECTOR-ASSY;SIR-T165,UL1007#26,U	
...3	T0076	AA39-00198D	LEAD CONNECTOR-ASSY;P55A/HCM4215W,UL1617	
...3	T0076	AA39-20010B	LEAD CONNECTOR-ASSY;,1P,500,YFH800-01,S,	
...3	T0076	AA39-20010D	LEAD CONNECTOR-ASSY;,1P,400,YFH800-01,S,	
...3	T0076	AA39-20010D	LEAD CONNECTOR-ASSY;,1P,400,YFH800-01,S,	
...3	T0076	AA39-20027B	LEAD CONNECTOR-ASSY;,6P,400,67096-006,S,	
...3	T0076	AA39-20031D	LEAD CONNECTOR-ASSY;,9P,500,67096-009,S,	
...3		AA69-01396A	BAG PE;SKD CHASSIS,LDPE,T0.03,240,180,NO	S.N.A
...3	Q371	AA96-00244H	ASSY H/S;SCREW,2SC4636(2),CRT,SLICON-OIL	S.N.A
....4		0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4	T0090	0502-000442	TR-POWER;2SC4636RB,NPN,2W,TO-220,ST,10-	
....4	T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
....4		AA62-00046A	HEAT SINK-PS;-,-,T1.0,-,D1(DREAM) 60X25X	S.N.A
...3	IC561	AA96-50311L	ASSY H/S;-,AMP,AA62-30175D ,TDA6111Q,HE	S.N.A
...3	IC531	AA96-50311L	ASSY H/S;-,AMP,AA62-30175D ,TDA6111Q,HE	S.N.A
...3	IC501	AA96-50311L	ASSY H/S;-,AMP,AA62-30175D ,TDA6111Q,HE	S.N.A
....4	T0074	1201-001131	IC-VIDEO AMP;6111,SIP,9P,-,SINGLE,-,PLAS	

Loc. No.		Code No.	Description ; Specification	Remark
....4	T0081	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
....4		AA62-30175D	HEAT SINK-PS;-,SECC,T1.0,-,33X15X30 FT-2	S.N.A
...3		AA97-07608A	ASSY AUTO-CRT;HCM4215W	S.N.A
....4	D372	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4	D504	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4	D509	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4	D361	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4	D362	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4	D371	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4	D510	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4	T0083	0402-000493	DIODE-RECTIFIER;1R5GU41,400V,1.5A,DO-15L	
....4	T0083	0402-000493	DIODE-RECTIFIER;1R5GU41,400V,1.5A,DO-15L	
....4	T0083	0402-000493	DIODE-RECTIFIER;1R5GU41,400V,1.5A,DO-15L	
....4	T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4	T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4	T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4	T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4	T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4	T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4	DZ016	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
....4	DZ016	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
....4	DZ016	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
....4	DZ016	0403-000708	DIODE-ZENER;MTZJ13B,13V,12.55-13.21V,500	
....4	DZ016	0403-000708	DIODE-ZENER;MTZJ13B,13V,12.55-13.21V,500	
....4	DZ016	0403-000708	DIODE-ZENER;MTZJ13B,13V,12.55-13.21V,500	
....4	DZ016	0403-000708	DIODE-ZENER;MTZJ13B,13V,12.55-13.21V,500	
....4	Q563	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4	Q534	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4	Q533	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4	Q504	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4	Q361	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4	Q362	0501-000366	TR-SMALL SIGNAL;KSC2330-Y,NPN,1W,TO-92L,	
....4	Q502	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4	T0090	0502-000006	TR-POWER;KSC1507,NPN,15W,TO-220,TP,120-	
....4	T0090	0502-000006	TR-POWER;KSC1507,NPN,15W,TO-220,TP,120-	
....4	T0090	0502-000006	TR-POWER;KSC1507,NPN,15W,TO-220,TP,120-	
....4	R125	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R584	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
....4	R554	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
....4	R524	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
....4	R580	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4	R550	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4	R520	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4	R577	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
....4	R547	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
....4	R517	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
....4	R366	2001-000109	R-CARBON(S);470OHM,5%,1/2W,AA,TP,2.4X6.4	
....4	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000539	R-CARBON;24KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000660	R-CARBON;33KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000723	R-CARBON;4.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000938	R-CARBON;68OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-001015	R-CARBON;9.1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R581	2001-001052	R-CARBON(S);1.5MOHM,5%,1/2W,AA,TP,2.4X6.	
....4	R551	2001-001052	R-CARBON(S);1.5MOHM,5%,1/2W,AA,TP,2.4X6.	
....4	R521	2001-001052	R-CARBON(S);1.5MOHM,5%,1/2W,AA,TP,2.4X6.	
....4	R371	2001-001065	R-CARBON(S);110KOHM,5%,1/2W,AA,TP,2.4X6.	
....4	R370	2001-001065	R-CARBON(S);110KOHM,5%,1/2W,AA,TP,2.4X6.	
....4	R369A	2001-001065	R-CARBON(S);110KOHM,5%,1/2W,AA,TP,2.4X6.	
....4	R367	2001-001065	R-CARBON(S);110KOHM,5%,1/2W,AA,TP,2.4X6.	
....4	R368	2001-001065	R-CARBON(S);110KOHM,5%,1/2W,AA,TP,2.4X6.	

Loc. No.	Code No.	Description ; Specification	Remark
....4 R369	2001-001065	R-CARBON(S);110KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R567	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R537	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R507	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R381	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R361	2001-001097	R-CARBON(S);2.4KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R374	2001-001110	R-CARBON(S);240KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R373	2001-001110	R-CARBON(S);240KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R372	2001-001110	R-CARBON(S);240KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R377	2001-001110	R-CARBON(S);240KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R375	2001-001113	R-CARBON(S);270KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R365	2001-001120	R-CARBON(S);3.3OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R574	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R544	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R514	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R583	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
....4 R582	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
....4 R553	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
....4 R552	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
....4 R523	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
....4 R522	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
....4 R589	2002-001015	R-COMPOSITION;47Kohm,5%,1/2W,AA,TP,3.7x9	
....4 R559	2002-001015	R-COMPOSITION;47Kohm,5%,1/2W,AA,TP,3.7x9	
....4 R529	2002-001015	R-COMPOSITION;47Kohm,5%,1/2W,AA,TP,3.7x9	
....4 R575	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
....4 R545	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
....4 R515	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
....4 R579	2002-001021	R-COMPOSITION;560KOHM,5%,1/2W,AA,TP,3.7X	
....4 R578	2002-001021	R-COMPOSITION;560KOHM,5%,1/2W,AA,TP,3.7X	
....4 R549	2002-001021	R-COMPOSITION;560KOHM,5%,1/2W,AA,TP,3.7X	
....4 R518	2002-001021	R-COMPOSITION;560KOHM,5%,1/2W,AA,TP,3.7X	
....4 R519	2002-001021	R-COMPOSITION;560KOHM,5%,1/2W,AA,TP,3.7X	
....4 R548	2002-001021	R-COMPOSITION;560KOHM,5%,1/2W,AA,TP,3.7X	
....4 R588	2003-000738	R-METAL OXIDE(S);56Kohm,5%,2W,AA,TP,4x12	
....4 R538	2003-000738	R-METAL OXIDE(S);56Kohm,5%,2W,AA,TP,4x12	
....4 R508	2003-000738	R-METAL OXIDE(S);56Kohm,5%,2W,AA,TP,4x12	
....4 R024	2004-001892	R-METAL(S);162Kohm,1%,1/2W,AA,TP,2.5x6.5	
....4 R024	2004-001892	R-METAL(S);162Kohm,1%,1/2W,AA,TP,2.5x6.5	
....4 R024	2004-001892	R-METAL(S);162Kohm,1%,1/2W,AA,TP,2.5x6.5	
....4 R573	2008-001129	R-FUSIBLE(S);1.5ohm,5%,1/2W,AF,TP,2.5x6.	
....4 R543	2008-001129	R-FUSIBLE(S);1.5ohm,5%,1/2W,AF,TP,2.5x6.	
....4 R513	2008-001129	R-FUSIBLE(S);1.5ohm,5%,1/2W,AF,TP,2.5x6.	
....4 C598	2201-000119	C-CERAMIC,DISC;100NF,+80-20%,50V,Y5V,TP,	
....4 C598	2201-000119	C-CERAMIC,DISC;100NF,+80-20%,50V,Y5V,TP,	
....4 C598	2201-000119	C-CERAMIC,DISC;100NF,+80-20%,50V,Y5V,TP,	
....4 C598	2201-000556	C-CERAMIC,DISC;0.47NF,10%,500V,Y5P,TP,5.	
....4 C598	2201-000723	C-CERAMIC,DISC;4.7NF,20%,3KV,Y5U,TP,16X5	
....4 C598	2201-000723	C-CERAMIC,DISC;4.7NF,20%,3KV,Y5U,TP,16X5	
....4 C598	2201-000723	C-CERAMIC,DISC;4.7NF,20%,3KV,Y5U,TP,16X5	
....4 C598	2201-000983	C-CERAMIC,DISC;1NF,10%,2KV,Y5P,TP,9X5MM,	
....4 C598	2201-000983	C-CERAMIC,DISC;1NF,10%,2KV,Y5P,TP,9X5MM,	
....4 C598	2201-000983	C-CERAMIC,DISC;1NF,10%,2KV,Y5P,TP,9X5MM,	
....4 C565	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
....4 C535	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
....4 C505	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
....4 C507	2305-000154	C-FILM,MPEF;100nF,5%,400V,TP,21.5x6.5x11	
....4 C537	2305-000154	C-FILM,MPEF;100nF,5%,400V,TP,21.5x6.5x11	
....4 C567	2305-000154	C-FILM,MPEF;100nF,5%,400V,TP,21.5x6.5x11	
....4 C361	2306-000122	C-FILM,MPPF;100nF,5%,50V,TP,7.3x4.0x5.0m	
....4 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000133	C-AL;1000uF,20%,16V,GP,TP,10x20,5	
....4 C701	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
....4 C701	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
....4 C701	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
....4 C701	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
....4 C701	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
....4 C701	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
....4 C701	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
....4 C701	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
....4 C701	2401-001621	C-AL;6.8uF,20%,450V,GP,TP,13x20,5	
....4 L531	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
....4 L501	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
....4 SG561	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
....4 SG563	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
....4 SG533	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
....4 SG501	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
....4 SG503	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
....4 SG531	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
....4 EL06	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EL03	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EL563	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL537	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL536	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL535	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL564	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL565	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL566	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL567	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL534	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL01	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL02	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL04	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL05	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL533	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL505	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL504	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL503	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 GT537	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT561	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT536	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT535	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT534	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT562	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT568	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT567	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT564	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT563	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT503	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT502	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT501	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT373	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT372	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT371	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT504	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT533	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT532	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT531	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT506	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT374	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT375	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 R125	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 DZ016	0403-000334	DIODE-ZENER;UZ2.7BSA,2.7V,2.54-2.75V,500	
....4 DZ016	0403-000334	DIODE-ZENER;UZ2.7BSA,2.7V,2.54-2.75V,500	
....4 DZ016	0403-000334	DIODE-ZENER;UZ2.7BSA,2.7V,2.54-2.75V,500	
....4 R566	2001-001049	R-CARBON(S);1.3KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R536	2001-001049	R-CARBON(S);1.3KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R506	2001-001049	R-CARBON(S);1.3KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R125	2001-000007	R-CARBON;3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000006	R-CARBON;2.4KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 C598	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.	
....4 C598	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.	
....4 C598	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.	
....4 C701	2401-001571	C-AL;47uF,+20%-0%,50V,GP,TP,8x11.5,	
....4 C701	2401-001571	C-AL;47uF,+20%-0%,50V,GP,TP,8x11.5,	
....4 C701	2401-001571	C-AL;47uF,+20%-0%,50V,GP,TP,8x11.5,	
....4 R125	2001-000319	R-CARBON;120KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000232	R-CARBON;1.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000908	R-CARBON;62KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000908	R-CARBON;62KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000908	R-CARBON;62KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 L561	2701-000168	INDUCTOR-AXIAL;3.3uH,5%,2.5x3.4mm	
....4 R382	2002-001014	R-COMPOSITION;6.8Kohm,10%,1/2W,AA,TP,3.7	
....4 PCB	AA41-00600E	PCB-CRT;HCM4215W,FR-1,1L,E,1.6T,245X197(	S.N.A
....4 T0083	0402-000243	DIODE-RECTIFIER;RC2-V1,2000V,0.2A,DO-201	
...3 T0076	BP39-00004B	LEAD CONNECTOR-ASSY;P55A/HCM4215W,UL3239	
...3 T0076	BP39-00004C	LEAD CONNECTOR-ASSY;P55A/HCM4215W,UL3239	

Loc. No.		Code No.	Description ; Specification	Remark
...3	T0076	BP39-00004C	LEAD CONNECTOR-ASSY;P55A/HCM4215W,UL3239	
...3	T0103	BP59-00005A	MODULE-FOCUS PACK ASS'Y;PJT TV,F301-P03A	
...3	T0076	AA39-20010C	LEAD CONNECTOR-ASSY;,1P,600,YFH800-01,S,	
...3	C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
...3		AA63-10002A	BAND-TIE;NYLON66 V2,L100,NTR	S.N.A
...3		6902-000395	BAG PE;LDPE,T0.05,W200,L140,,,	S.N.A
..2	T0098	BP94-00238A	ASSY PCB MISC-VM;DP,HCM4215W3S/XAA,P55A	
...3		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3	RZ120	2008-001097	R-FUSIBLE(S);33OHM,5%,1/2W,AC,BK,2.5X6.5	
...3	T0121	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
...3	T0079	AA33-00017A	MAGNET CONVERGENCE;JH 92LT - 29G,-,29.1M	
...3	T0076	AA39-20055C	LEAD CONNECTOR-ASSY;,6P,500,YBNH025-06,6	
...3	QZ102	AA96-00243L	ASSY H/S;-,CRT,AA62-000450A,2SC2344,HERC	S.N.A
....4		0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4	T0090	0502-000153	TR-POWER;2SC2344-D,NPN,1.2W,TO-220,-,60	
....4	T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
....4		AA62-00045A	HEAT SINK-PS;-,-,T1.0,-,-,DREAM,-,-,-,-	S.N.A
...3	QZ101	AA96-00243M	ASSY H/S;-,AMP,AA62-000450A,2SA1011,HERC	S.N.A
....4		0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4	T0090	0502-000131	TR-POWER;2SA1011-D,PNP,1.2W,TO-220,-,60	
....4	T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
....4		AA62-00045A	HEAT SINK-PS;-,-,T1.0,-,-,DREAM,-,-,-,-	S.N.A
...3		AA97-07230M	ASSY AUTO-VM;COMMANDO	S.N.A
....4	DZ106	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4	DZ105	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4	DZ102	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4	T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4	T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4	T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4	QZ103	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4	QZ106	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4	QZ105	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4	QZ104	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4	RZ122	2001-000019	R-CARBON(S);10OHM,5%,1/2W,AA,TP,2.4X6.4M	
....4	R125	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000554	R-CARBON;270OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000666	R-CARBON;33OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000832	R-CARBON;510OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	RZ110	2001-001100	R-CARBON(S);2.7OHM,5%,1/2W,AA,TP,2.4X6.4	
....4	RZ104	2001-001100	R-CARBON(S);2.7OHM,5%,1/2W,AA,TP,2.4X6.4	
....4	RZ105	2001-001139	R-CARBON(S);39KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4	RZ106	2001-001139	R-CARBON(S);39KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4	RZ114	2003-000532	R-METAL OXIDE(S);18ohm,5%,2W,AF,TP,4x12m	
....4	RZ103	2003-000713	R-METAL OXIDE(S);47ohm,5%,2W,AF,TP,4x12m	
....4	RZ111	2003-000713	R-METAL OXIDE(S);47ohm,5%,2W,AF,TP,4x12m	
....4	RZ123	2003-002157	R-METAL OXIDE;220OHM,5%,2W,AG,TP,6X16MM	
....4	RZ113	2003-002157	R-METAL OXIDE;220OHM,5%,2W,AG,TP,6X16MM	
....4	RZ112	2003-002157	R-METAL OXIDE;220OHM,5%,2W,AG,TP,6X16MM	
....4	RFZ101	2008-001086	R-FUSIBLE(S);3.3ohm,5%,2W,AG,TP,3.9x12mm	
....4	C598	2201-000193	C-CERAMIC,DISC;0.01NF,0.25PF,50V,C0G,TP,	
....4	C598	2201-000193	C-CERAMIC,DISC;0.01NF,0.25PF,50V,C0G,TP,	
....4	C598	2201-000516	C-CERAMIC,DISC;4.7NF,+100-0%,500V,Y5U,TP	
....4	C598	2201-000516	C-CERAMIC,DISC;4.7NF,+100-0%,500V,Y5U,TP	
....4	C598	2201-000604	C-CERAMIC,DISC;0.056NF,+100-0%,500V,SL,T	
....4	C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4	C701	2401-000832	C-AL;220uF,20%,25V,GP,TP,8x11.5,5	
....4	C701	2401-001157	C-AL;33uF,20%,160V,GP,TP,12.5x20,5	
....4	C701	2401-001220	C-AL;4.7uF,20%,160V,GP,TP,8x11.5,5	
....4	C701	2401-001220	C-AL;4.7uF,20%,160V,GP,TP,8x11.5,5	
....4	C701	2401-001513	C-AL;47uF,20%,16V,WT,TP,5x11,5	
....4	C701	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
....4	LZ101	2701-000002	INDUCTOR-AXIAL;100uH,10%,4.2x9.8mm	
....4	CN906	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
....4	CN906	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
....4	CN906	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
....4	PCB	AA41-00611A	PCB-VM;HCM4215W,FR-1,1L,A,1.6T,245X245,P	S.N.A
...3	T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
..2	T0105	BP94-00239A	ASSY PCB MISC-DY-JACK;DP,HCM4215W3S/XAA,	
...3		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3	GT13	AA60-40012D	PIN-GT,ASSY;T1.6,6-12.5-,NYLON66	S.N.A
...3	GT09	AA60-40012D	PIN-GT,ASSY;T1.6,6-12.5-,NYLON66	S.N.A
...3	GT05	AA60-40012D	PIN-GT,ASSY;T1.6,6-12.5-,NYLON66	S.N.A
...3	GT01	AA60-40012D	PIN-GT,ASSY;T1.6,6-12.5-,NYLON66	S.N.A
...3		AA61-01197A	HOLDER-PCB,DY;COMANDO,ABS V0,BLK	S.N.A
...3		AA97-07230N	ASSY AUTO;COMMANDO	S.N.A
....4	R301	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4	
....4	R302	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4	
....4	R303	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4	
....4	PCB	AA41-00632A	PCB-DY CONNECTION;HCM4215W,FR-1,1L,A,1.6	S.N.A
..2	T0098	BP94-00517Z	ASSY PCB MISC-CONTROL;DP,HCN4226W,P55A,K	
...3		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3	T0121	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
...3	SWY08	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3	SWY07	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3	SWY06	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3	SWY05	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3	SWY04	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3	SWY03	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3	SWY01	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3	CN906	3711-000447	CONNECTOR-HEADER;BOX,3P,1R,2.5MM,ANGLE,-	
...3	CN906	3711-000479	CONNECTOR-HEADER;BOX,5P,1R,2.5mm,ANGLE,-	
...3	CN906	3711-003353	CONNECTOR-HEADER;BOX,11P,1R,2.5mm,ANGLE,	
...3	RMY01	AA32-00012A	MODULE REMOCON;ORC-50HF2,38KHZ,940NM,MES	
...3	T0076	AA39-00223C	LEAD CONNECTOR-ASSY;P54A/SVP-42W5HD,UL10	
...3	CNW02	AA39-00259B	LEAD CONNECTOR;SVP-43W6,UL1007#26,UL/CSA	
...3	T0076	AA39-20020D	LEAD CONNECTOR-ASSY;,5P,600,67096-005,S,	
...3		BP97-00511H	ASSY AUTO;HCN4226WX/XAA,P55A	S.N.A
....4	DZ016	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
....4	DZ016	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
....4	QY01	0504-000123	TR-DIGITAL;KSR1010,NPN,300mW,10K,TO-92,T	
....4	RY07	2001-000020	R-CARBON(S);22OHM,5%,1/2W,AA,TP,2.4X6.4M	
....4	RY09	2001-000109	R-CARBON(S);470OHM,5%,1/2W,AA,TP,2.4X6.4	
....4	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000832	R-CARBON;510OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000832	R-CARBON;510OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000832	R-CARBON;510OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	RY08	2001-001108	R-CARBON(S);22KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4	C701	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
....4	PCB	BP41-00023A	PCB;SVP-43W8,PCB-CONTROL,1L,1.6T,330*245	S.N.A
..2	T0100	BP94-00559A	ASSY PCB MISC-A/V FRONT;DP,HCN4226W,P55A	
...3		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3	SW101	3404-000208	SWITCH-TACT;12V,50mA,120gf,6x6mm,SPST	
...3	CN906	3711-000447	CONNECTOR-HEADER;BOX,3P,1R,2.5MM,ANGLE,-	
...3	CN906	3711-003601	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,ANGLE,	
...3	JK101	3722-000544	JACK-VHS;4P,11.5mm,AG,BLK,N	
...3	JK102	3722-001164	JACK-PIN;3P,3.4mm,SN,WH:YE:RE,#16-22	
...3	T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
...3	T0076	AA39-00257C	LEAD CONNECTOR-ASSY;P54A/SVP-42W5HD,UL25	
...3	T0076	AA39-00260A	LEAD CONNECTOR-ASSY;,UL1007#26,UL/CSA,3P	
...3		AA63-10002A	BAND-TIE;NYLON66 V2,L100,NTR	S.N.A
...3		AA97-07429A	ASSY AUTO-A/V FRONT;HCM4215WX/XAA,P55A	S.N.A
....4	R125	2001-000006	R-CARBON;2.4KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	PCB	AA41-00499B	PCB-FRONT A/V;SVP-54T6SR,FR-1,1L,A,1.6T,	S.N.A
...3	T0105	BP96-00007G	ASSY COVER P-SIDE,JACK;42W5,ABS HB G3676	
....4		AA61-01128C	HOLDER-SIDE AV;42W5,ABS HB,G3676,SV-704P	S.N.A
....4		AA64-02086S	INLAY-AV;42W5,PS SHEET,T0.5,P55A,S/PG	S.N.A
....4	T0150	AA64-02780C	DOOR-AV;42W5,ABS HB,G3676,SV-704P	
..2	CIS	BP94-00564C	ASSY PCB MISC-POWER S/W;DP, HCN4226W,P55	
...3	LEDY04	0601-001381	LED;ROUND,RED/GRN,5.0MM,650/563NM	
...3	LEDY03	0601-001381	LED;ROUND,RED/GRN,5.0MM,650/563NM	
...3	LEDY02	0601-001381	LED;ROUND,RED/GRN,5.0MM,650/563NM	
...3	LEDY01	0601-001381	LED;ROUND,RED/GRN,5.0MM,650/563NM	
...3	SWY02	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3	CN906	3711-000479	CONNECTOR-HEADER;BOX,5P,1R,2.5mm,ANGLE,-	
...3		AA61-01140E	CASE-PS BOX;ANTISTATIC,PS,295,295,32	S.N.A
...3	PCB	BP41-00022A	PCB;SVP-43W8,PCB-MASTER-S/W,1L,1.6T,245*	S.N.A
..2	T0096	BP95-00075A	ASSY SUB-DVI;DP,HCM4215WJX/XAA,P55A,DVI	
...3		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3	Q409	0505-000109	FET-SILICON;2N7000,N,60V,200mA,5ohm,400m	
...3	Q409	0505-000109	FET-SILICON;2N7000,N,60V,200mA,5ohm,400m	
...3	DX301	2801-001385	CRYSTAL-UNIT;14.31818MHz,30ppm,28-AAA,16	
...3	DX701	2801-001385	CRYSTAL-UNIT;14.31818MHz,30ppm,28-AAA,16	
...3	CN906	3711-002643	CONNECTOR-HEADER;BOX,4P,1R,2.5mm,STRAIGH	
...3		AA69-01396B	BAG PE;SKD CHASSIS,LDPE,T0.03,130,130,NO	S.N.A
...3		BP97-00166A	ASSY SMD;HCM4215WJX/XAA,DVI-AUTO,P55A	S.N.A
....4	DD512	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	

Loc. No.	Code No.	Description ; Specification	Remark
....4 DD511	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4 DD510	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4 DD509	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4 DD513	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4 DD514	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4 DD515	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4 DD516	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4 DD501	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4 DD502	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4 DD503	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4 DD504	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4 DD508	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4 DD507	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4 DD506	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4 DD505	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4 DD901	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
....4 DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
....4 DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
....4 DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
....4 IC104	0801-002345	IC-CMOS LOGIC;7S04,INVERTER,SOT-353,5P,4	
....4 IC01	1002-001333	IC-A/D&D/A CONVERTER;GM7030,10BIT,PQFP,1	
....4 IC112	1103-000180	IC-EEPROM;24C16,2Kx8Bit,SOP,8P,150MIL,10	
....4 T0123	1203-001419	IC-VOLTAGE REGULATOR;4931,TO-252,3P,6.6x	
....4 IC05	1203-001824	IC-VOL. DETECTOR;7042,SOT-89,3P,-,PLASTI	
....4 T0123	1203-002351	IC-VOLTAGE REGULATOR;LF25C,DPAK,3P,240MI	
....4 DR514	2007-000071	R-CHIP;22ohm,5%,1/10W,TP,1608	
....4 DR515	2007-000071	R-CHIP;22ohm,5%,1/10W,TP,1608	
....4 DR516	2007-000071	R-CHIP;22ohm,5%,1/10W,TP,1608	
....4 DR517	2007-000071	R-CHIP;22ohm,5%,1/10W,TP,1608	
....4 DR501	2007-000071	R-CHIP;22ohm,5%,1/10W,TP,1608	
....4 DR502	2007-000071	R-CHIP;22ohm,5%,1/10W,TP,1608	
....4 DR504	2007-000071	R-CHIP;22ohm,5%,1/10W,TP,1608	
....4 DR506	2007-000071	R-CHIP;22ohm,5%,1/10W,TP,1608	
....4 DR513	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
....4 DR512	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
....4 DR510	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
....4 DR109	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
....4 DR301	2007-000079	R-CHIP;1.8Kohm,5%,1/10W,TP,1608	
....4 DR901	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
....4 DR519	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
....4 DR518	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
....4 DR511	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
....4 DR508	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
....4 DR701	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
....4 DR520	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
....4 DR509	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
....4 DR210	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
....4 DR702	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
....4 DR703	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
....4 DR704	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
....4 DR706	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
....4 DR707	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
....4 DR201	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
....4 DR202	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
....4 DR203	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
....4 DR204	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
....4 DR205	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
....4 DR209	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
....4 DR208	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
....4 DR207	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
....4 DR206	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
....4 DR902	2007-000102	R-CHIP;100Kohm,5%,1/10W,TP,1608	
....4 C120	2203-000041	C-CERAMIC,CHIP;0.01NF,0.25PF,50V,C0G,TP,	
....4 C120	2203-000041	C-CERAMIC,CHIP;0.01NF,0.25PF,50V,C0G,TP,	
....4 C120	2203-000041	C-CERAMIC,CHIP;0.01NF,0.25PF,50V,C0G,TP,	
....4 C120	2203-000041	C-CERAMIC,CHIP;0.01NF,0.25PF,50V,C0G,TP,	
....4 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V

Loc. No.		Code No.	Description ; Specification	Remark
...3	T0076	AA39-20032B	LEAD CONNECTOR-ASSY;,12P,300,67096-012,S	
...3	PL1	3701-001173	CONNECTOR-DSUB;24P,3R,FEMALE,ANGLE,AUF	
..2		BP95-00147D	ASSY SUB PCB-SENSOR;DP,P54A,SENSOR	
...3		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3		AA69-01808B	BAG-SHEET;,LDPE(ANTISTATIC),T0.05,800,50	S.N.A
...3		BP97-00208A	ASSY SMD;0	S.N.A
....4	Q01	0501-000342	TR-SMALL SIGNAL;KSC1623-Y,NPN,200mW,SOT-	
....4	PCB	AA41-00853A	PCB-SERSOR;SVP-42W5HRC,FR-4,2L,A,1.6T,24	S.N.A
....4	D01	BP32-00001A	SENSOR PHOTO;BCS5030G1,-40 TO +85,0.42 U	
....4	R01	2007-000305	R-CHIP;10Mohm,5%,1/10W,TP,1608	
....4	R02	2007-000109	R-CHIP;1Mohm,5%,1/10W,TP,1608	
....4	R03	2007-000109	R-CHIP;1Mohm,5%,1/10W,TP,1608	
....4		0202-001167	SOLDER-CREAM;RX3603-2330HO,S45A,PASTE,SN	S.N.A
...3	CN906	3711-000447	CONNECTOR-HEADER;BOX,3P,1R,2.5MM,ANGLE,-	

ASSY P/MATERIAL

1		BP92-00542C	ASSY P/MATERIAL;HCN4226W5S/XAA,P55A	S.N.A
..2		AA60-40006A	PIN-STAPLE;AUTO,33X17.8X2.4,H18,33X17.8X	S.N.A
..2		AA61-00049B	HOLDER-BOX;-,PP,-,-,-,NTR,V0,AA61-20285A	S.N.A
...3		AA61-20285A	HOLDER-BOX;3456,PP,-,-,-,WHT,VO	S.N.A
..2		AA63-10007C	BAND-PP;W18,CLEA,1G	S.N.A
..2		AA69-00305A	BAG AIR;ALL,LDPE,1000,500,CLR,	S.N.A
..2		AA69-00744L	BAG-SHEET;-,HDPE PE FOAM,T0.015,W1650,H1	S.N.A

ASSY ACCESSORY

1	M0016	BP92-00577Q	ASSY ACCESSORY;0	S.N.A
..2		6902-000018	BAG PE;LDPE,T0.1,W280,L400,GRY,8,2-	S.N.A
..2	T0116	AA39-00006A	CABLE RCA;,3000MM	
..2	T0074	AA59-00262A	REMOCON;,TM63,COMMONDO,48,G6671B,EX,S/S	
...3	T0122	2802-000194	RESONATOR-CERAMIC;8MHz,1.0%,TP,8.5x4.5x5	
...3	T0119	AA09-00275A	IC MICOM;Z86L8808SSC-R51PX,SOP,ST,SZTM-8	
..2	T0113	AA61-20126A	HOLDER-LEG;-,ABS,-,-,-,BLK,HB	
..2		AA68-00371C	CARD WARRANTY-01;,SEA,W/P100(G),1 YEAR	S.N.A
..2		AA68-40065B	CARD-REGISTRATION;,SEA,A5,ENG,A/P220,2P(	S.N.A
..2		AA69-30009C	BAG-SHEET;LDPE,T0.08,W150,L120,-,-,-	S.N.A
..2	CIS	BP68-00054A	MANUAL USERS;HCM473WJX,ENG,W/P100G,P55A,	

ASSY K/D-ASSY,CRT

1		BP98-00091A	ASSY K/D-ASSY,CRT;HCM4215W3S/XAA,P55A	S.N.A
..2	T0262	BP98-00084A	ASSY K/D-CRT-R;HCM4215W3S/XAA	
...3		AA03-00200A	CRT MONO;P16LSG03RJA,FREE,3.30mH,2.20mH,	S.N.A
...3	T0079	AA33-00016A	MAGNET CONVERGENCE;JH 92LT - 29F,-,29.1M	
...3	T0076	AA39-00018A	LEAD CONNECTOR-ASSY;,UL1015#22,UL/CSA,1P	
...3		AA60-00126B	SPACER-CAP;PROJ,EPDM,BLK	S.N.A
...3		AA60-00127B	SPACER-LENS;PROJ,SILICONE,D/GRAY	S.N.A
...3		AA60-00128B	SPACER-CRT;PROJ(65),SILICONE,D/GRAY	S.N.A
...3	T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
...3		AA61-00056B	BRACKET-LENS;PROJECTION,SECC,T1.6,-,-,-,	S.N.A
...3	T0114	AA61-00810B	HOLDER-CAP;PROJ,PC,CLR	
...3		AA61-00845A	CASE-COUPLER,R;DP,PROJ,AA61-00806B	S.N.A
....4		AA61-00806B	CASE-COUPLER,R;PROJ,ALDC,T8,BLK	S.N.A
....4		AA63-10007C	BAND-PP;W18,CLEA,1G	S.N.A
...3		AA63-00076A	SPACER-LENS;PROJECTION,FELT ,-,-,-,BROWN	S.N.A
...3	T0109	AA67-00187A	LENS-ASSY;DELTA71,CLEAR A/B	
...3	T0051	AA67-00188A	LENS;DELTA71,RED C ELEMENT	
...3	T0107	AA91-00735B	ASSY-BRKT,CRT;DP,AA91-00722A,PROJ	
....4	T0107	AA91-00722A	ASSY-BRKT,CRT;,SECC T1.6,PROJ	
.....5	T0072	AA61-00473B	BRACKET-CRT;53,SECC,T1.6,-,-,-,-	S.N.A
.....5		AA61-00615B	BRACKET-EARTH;54J8,PBS,T0.5,-,-,-,-	S.N.A
.....5		AA61-00812A	SPRING ETC-WIRE;PROJ,STS,3.6	S.N.A
...3		BP61-00091A	HOLDER-CRT;PJTV,PCABS GF20%,BLUE	S.N.A
...3		BP61-00079A	HOLDER-DY;,PJTV,T0.5,NYLON66 V2	S.N.A
...3	T0078	AA27-00249A	DEFLECTION YOKE;-,DPD-5292AA,S/S,7,29.1	
...3	T0117	AA26-30006F	TRANS FBT-ANODE CAP ASS'Y;-,FWZ-50A001C,	
..2	T0261	BP98-00085A	ASSY K/D-CRT-G;HCM4215W3S/XAA	
...3		AA03-00201A	CRT MONO;P16LSG03HKA,FREE,3.30mH,2.20mH,	S.N.A

Loc. No.		Code No.	Description ; Specification	Remark
...3	T0076	AA39-00018A	LEAD CONNECTOR-ASSY;,UL1015#22,UL/CSA,1P	
...3		AA60-00125B	SPACER-CRT;PROJ,SILICONE,D/GRAY	S.N.A
...3		AA60-00126B	SPACER-CAP;PROJ,EPDM,BLK	S.N.A
...3		AA60-00127B	SPACER-LENS;PROJ,SILICONE,D/GRAY	S.N.A
...3	T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
...3		AA61-00056B	BRACKET-LENS;PROJECTION,SECC,T1.6,-,-,-,	S.N.A
...3		AA61-00809B	HOLDER-CRT;PROJ,PC/ABS GF 20%,BLK	S.N.A
...3	T0114	AA61-00810B	HOLDER-CAP;PROJ,PC,CLR	
...3		AA61-00846A	CASE-COUPLER,G;DP,PROJ,AA61-00807B	S.N.A
....4		AA61-00807B	CASE-COUPLER,G;PROJ,ALDC,T8,BLK	S.N.A
....4		AA63-10007C	BAND-PP;W18,CLEA,1G	S.N.A
...3		AA63-00076A	SPACER-LENS;PROJECTION,FELT ,-,-,-,BROWN	S.N.A
...3	T0109	AA67-00187A	LENS-ASSY;DELTA71,CLEAR A/B	
...3	T0051	AA67-00189A	LENS;DELTA71,GREEN C ELEMENT	
...3	T0107	AA91-00735B	ASSY-BRKT,CRT;DP,AA91-00722A,PROJ	
....4	T0107	AA91-00722A	ASSY-BRKT,CRT;,SECC T1.6,PROJ	
.....5	T0072	AA61-00473B	BRACKET-CRT;53,SECC,T1.6,-,-,-,-	S.N.A
.....5		AA61-00615B	BRACKET-EARTH;54J8,PBS,T0.5,-,-,-,-	S.N.A
.....5		AA61-00812A	SPRING ETC-WIRE;PROJ,STS,3.6	S.N.A
...3		BP61-00079A	HOLDER-DY;,PJTV,T0.5,NYLON66 V2	S.N.A
...3	T0078	AA27-00249A	DEFLECTION YOKE;-,DPD-5292AA,S/S,7,29.1	
...3	T0117	AA26-30006F	TRANS FBT-ANODE CAP ASS'Y;-,FWZ-50A001C,	
..2	T0260	BP98-00086A	ASSY K/D-CRT-B;HCM4215W3S/XAA	
...3		AA03-00202A	CRT MONO;P16LSG03BMB,FREE,3.30mH,2.20mH,	S.N.A
...3	T0079	AA33-00018A	MAGNET CONVERGENCE;JH 92LT - 36F,-,29.1M	
...3	T0076	AA39-00018A	LEAD CONNECTOR-ASSY;,UL1015#22,UL/CSA,1P	
...3		AA60-00126B	SPACER-CAP;PROJ,EPDM,BLK	S.N.A
...3		AA60-00127B	SPACER-LENS;PROJ,SILICONE,D/GRAY	S.N.A
...3		AA60-00128B	SPACER-CRT;PROJ(65),SILICONE,D/GRAY	S.N.A
...3	T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
...3		AA61-00056B	BRACKET-LENS;PROJECTION,SECC,T1.6,-,-,-,	S.N.A
...3	T0114	AA61-00810B	HOLDER-CAP;PROJ,PC,CLR	
...3		AA61-00847A	CASE-COUPLER,B;DP,PROJ,AA61-00808B	S.N.A
....4		AA61-00808B	CASE-COUPLER,B;PROJ,ALDC,T8,BLK	S.N.A
....4		AA63-10007C	BAND-PP;W18,CLEA,1G	S.N.A
...3		AA63-00076A	SPACER-LENS;PROJECTION,FELT ,-,-,-,BROWN	S.N.A
...3	T0109	AA67-00187A	LENS-ASSY;DELTA71,CLEAR A/B	
...3	T0051	AA67-00190A	LENS;DELTA71,CLEAR C ELEMENT	
...3	T0107	AA91-00735B	ASSY-BRKT,CRT;DP,AA91-00722A,PROJ	
....4	T0107	AA91-00722A	ASSY-BRKT,CRT;,SECC T1.6,PROJ	
.....5	T0072	AA61-00473B	BRACKET-CRT;53,SECC,T1.6,-,-,-,-	S.N.A
.....5		AA61-00615B	BRACKET-EARTH;54J8,PBS,T0.5,-,-,-,-	S.N.A
.....5		AA61-00812A	SPRING ETC-WIRE;PROJ,STS,3.6	S.N.A
...3		BP61-00091A	HOLDER-CRT;PJTV,PCABS GF20%,BLUE	S.N.A
...3		BP61-00079A	HOLDER-DY;,PJTV,T0.5,NYLON66 V2	S.N.A
...3	T0078	AA27-00249A	DEFLECTION YOKE;-,DPD-5292AA,S/S,7,29.1	
...3	T0117	AA26-30006F	TRANS FBT-ANODE CAP ASS'Y;-,FWZ-50A001C,	

You can search for the updated part code through ITSELF web site.
URL : http://itself.sec.samsung.co.kr

7-3 ST54T8PCS/XAX

ASSY SKD PART

Loc. No.		Code No.	Description ; Specification	Remark
1		AA92-07172A	ASSY SKD PART;ST54T8PCS/XAX,P55A	S.N.A
..2	T0118	AA26-00101A	TRANS FBT-H/V DISTRIBUTOR;FWZ50A001E/FFA	
..2		AA63-10002A	BAND-TIE;NYLON66 V2,L100,NTR	S.N.A
..2		AA65-30018A	CLAMPER CORE-WIRE;DONG-A,NYLON-66,-,-,-,	S.N.A
..2		AA65-30104B	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,	S.N.A
..2		AA65-30111A	CLAMPER CORE-WIRE;ALL MODEL,NYLON,V0,-,W	S.N.A
..2	T0066	AA96-20112C	ASSY POWER CORD;-,EP2/NO,H/C250,KJ10,THA	S.N.A
...3		3811-000401	WIRE-PVC CU;BCWA,300V,ROLL,17/0.16mm,#22	S.N.A
...3	T0077	AA39-10006K	CBF POWER CORD;-,KJ-10,SPT-2 2/18AWG,240	
...3		AA61-20284A	HOLDER;P-CORD,PP,-,-,-,BLK,VO,KE-002	S.N.A

ASSY K/D-SKD P/MATERIAL

1		AA98-01629A	ASSY K/D-SKD P/MATERIAL;SKD FORMAT-3	S.N.A
..2		AA69-00305A	BAG AIR;ALL,LDPE,1000,500,CLR,	S.N.A
..2		AA69-00306A	BAG AIR;LDPE,-,1800,1000,CLR,ASSY,ALL,-	S.N.A
..2		AA69-90001A	CHEMICALS-SILICAGEL;-,-,-,-,-,M2,5GR,-,-	S.N.A
..2		AA60-40006A	PIN-STAPLE;AUTO,33X17.8X2.4,H18,33X17.8X	S.N.A
..2	WO	AA63-10007C	BAND-PP;W18,CLEA,1G	S.N.A

ASSY COVER FRONT

1	M0001	BP90-00142H	ASSY COVER FRONT;ST54T8PCS/XAX,P55A	S.N.A
..2	HC+CW	6009-001296	SCREW-SPECIAL;BH,+,-,M4,L12(11),ZPC(BLK)	
..2	T0076	AA39-00284A	LEAD CONNECTOR-ASSY;SVP-47W3HD,UL2547#26	
..2		AA60-00072B	SPACER-COVER,DUST;43,54,62J9,SPONGE 94HF	S.N.A
..2	T0069	AA60-00091N	SPACER-FELT;-,FELT,70X10,-,-,BLK,T1.0,-,	S.N.A
..2		AA61-00618C	GUIDE-FLOW;54J8,J7,ABS,IVORY,V0	S.N.A
..2	T0069	AA63-60002V	SPACER-FELT;-,FELT,-,-,-,BLK,T0.3,-,60X4	S.N.A
..2	T0069	AA63-60002V	SPACER-FELT;-,FELT,-,-,-,BLK,T0.3,-,60X4	S.N.A
..2	T0069	AA63-60131A	SPACER-FELT;SVP403J,FELT,-,-,-,BLK,T0.5,	S.N.A
..2		AA65-00016A	CLAMPER CORE-CABLE;PJTV,NYLON,NTR,6/6	S.N.A
..2		AA98-00333M	ASSY K/D-SPEAKER;20W(3001-001107),8 OHM	S.N.A
...3	T0082	3001-001107	SPEAKER;20W,8OHM,95DB,1300HZ	
...3	T0082	3001-001134	SPEAKER;30W,8OHM,93DB,60HZ	
...3	T0076	AA39-00042A	LEAD CONNECTOR-ASSY;,2.2UF,200MM,REC,REC	
...3		AA98-00049A	ASSY-LEAD,CON;-,LEAD-CON,CORE,AA39-20505	S.N.A
....4	T0121	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
..2		BP61-00043B	HOLDER-SENSOR;W9,PC HB,VIOLET	S.N.A
..2		BP65-00004A	CLAMPER CORE-WIRE;52Q7,NYLON	S.N.A
..2	T0064	BP65-00005A	CLAMPER CORE;52Q7,NYLON	S.N.A
..2	T0102	BP73-00004A	RUBBER-CAP;42W5,SILICONE,WHT,RUBBER	
..2	T0076	BP96-00338B	ASSY COVER P-FRONT MASK;DP,BP64-00164E,5	S.N.A
...3		AA65-00020A	CLAMPER CORE-WIRE;55W9,NYLON 66	S.N.A
...3	T0017	BP64-00164E	CABINET-FRONT MASK;54T8,HIPS,HB,G4309,SV	S.N.A
...3	T0102	BP73-00004A	RUBBER-CAP;42W5,SILICONE,WHT,RUBBER	
...3		BP61-00285A	HOLDER-MASK SNAP;54T8,HIPS HB,BLK	S.N.A
..2	T0071	BP96-00339B	ASSY COVER P-FRONT BOT;DP,BP64-00151D,54	S.N.A
...3	T0081	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
...3	T0081	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
...3		AA61-01104A	HOLDER-LOCK;Z7,ABS	S.N.A
...3		BP60-00004A	SPACER-BUMPON;55W9,RUBBER,5MM	S.N.A
...3		BP61-00108A	GUIDE-KONB,CONTROL;42W4,G3676,42W4,ABS	HS.N.A
...3		BP64-00078A	WINDOW REMOCON-LED;42W4,PC,42W4,PC,CLEA	S.N.A
...3		BP64-00151D	CABINET FRONT-BOT;54T8,HIPS,HB,G4309,SV0	S.N.A
...3	T0022	BP64-00165A	KNOB CONTROL;54T8,ABS,HB,GRAY,G3676	
...3	T0023	BP64-00166A	KNOB POWER;54T8,ABS,HB,GRAY,G3676	
...3	T0057	BP64-00178A	BADGE-BRAND;ALL,AL,T1.5,78,13.0,,BLK,SIL	S.N.A
...3	T0081	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
...3	CIS7	AA61-60003J	SPRING ETC-CS;-,SUS304,-,-,OD6,N7,OD6,-,	S.N.A
...3		AA61-20129A	HOLDER-WIRE;-,NYLON-66,-,-,-,NTR,DAFC-25	S.N.A
...3		AA61-01132A	VELCRO-A;COMMANDO,BST1 1/4H	S.N.A
..2		BP96-00340A	ASSY COVER P-DOOR RACK;DP,BP64-00154A,54	S.N.A
...3	T0081	6003-001323	SCREW-TAPTITE;BH,+,B,M4,L12,NI PLT,SWRCH	S.N.A
...3	T0081	6003-001374	SCREW-TAPTITE;FH,+,B,M4,L12,NI PLT,SWRCH	
...3		AA61-01116A	BRACKET-HINGE;55W9,SECC,T2.0	S.N.A
...3		BP61-00181A	BRACKET-DOOR,RACK;54T8,SECC,T1.0	S.N.A
...3	CIS1	BP64-00154A	CABINET-DOOR,RACK;54T8,HIPS,HB,GRAY	
...3		BP64-00208A	WINDOW-DOOR RACK;54T8,GLASS,T3.0,,,,BR,	S.N.A
..2		BP96-00341A	ASSY MISC P-BRKT SCREEN TB;DP,BP61-00189	S.N.A
...3	T0254	BP61-00189A	BRACKET-SCREEN,TB;54T8,SECC,T1.0,SCREEN	S.N.A
..2		BP96-00342A	ASSY MISC P-BRKT SCREEN RL;DP,BP61-00190	S.N.A
...3	T0056	BP61-00190A	BRACKET-SCREEN,RL;54T8,SECC,T1.0,SCREEN	S.N.A
..2		BP98-00192A	ASSY K/D-WOOD;54T8,WOOD	S.N.A
...3		AA61-00094C	HOLDER-RAIL;PCJ533R,ABS,-,-,-,BLK,HB,480	S.N.A
...3		AA61-00458C	CASTER;,URETHANE,OD40,BLK,H47,95'	S.N.A
...3		AA61-00507B	HOLDER-CABINET,WOOD;43,54,62J8,ABS,-,-,-	S.N.A
...3		AA61-00616B	HOLDER-CRT,MAIN;54J7,DP,-,-,-,-,AA61-005	S.N.A
....4		AA61-00506B	HOLDER-CRT,MAIN;43,54,62J8,HIPS,-,-,-,BL	S.N.A
...3		AA61-01115A	HOLDER-VENT;55W9,HIPS HB,BLK	S.N.A
...3		AA63-00384A	COVER-DUCT;DP 54J8,-,-,-,-,HB,-,AA63-003	S.N.A
....4		AA63-00348B	COVER-DUCT;54,62J8,HIPS,-,-,-,HB,BLK,-	S.N.A
...3		AA64-02859A	CABINET-BOSS,RACK;55W9,HIPS,HB,NTR	S.N.A
...3		BP61-00075A	HOLDER-JERSEY,ASSY;W3,ABS V0,GRAY,63-000	S.N.A
....4	T0069	AA63-00099C	SPACER-FELT;47W3,FELT,BLK,T0.35,30*30	S.N.A
....4		AA61-00508D	HOLDER-JERSEY;W3,ABS V0,GRAY,G4309	S.N.A
...3		BP61-00191A	HOLDER-MASK,TOP;54T8,ABS HB,BLK	S.N.A
...3		BP61-00191B	HOLDER-MASK SIDE;54T8,ABS,HB,,,,BLK,	S.N.A
...3		BP64-00207A	CABINET-WOOD;54T8,WOOD,,,,,SILVER(SDE833	S.N.A
...3	HC+CW	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,-,-,ZP	S.N.A
...3		AA61-00097A	HOLDER-WIRE;-,NYLON 6/6,-,-,-,NTR,-	S.N.A
...3		AA61-01133A	VELCRO-B;COMMANDO,BST1 1/4H	S.N.A
...3	HC+CW	AA60-10051B	SCREW-WOOD;-,SWRCH18A,M3.5,L11,RH,+,-,-	S.N.A
...3		BP61-00284A	HOLDER-MASK CORNER;54T8,ABS HB,BLK	S.N.A
...3		AA61-00856B	BRACKET-DOOR;47W3,SECC,T1.0,BLK	S.N.A
..2	T0115	AA61-00617B	BRACKET-CRT,MAIN;DP,54J7,AA61-00475B	S.N.A
...3	T0115	AA61-00475B	BRACKET-CRT,MAIN;54,SECC,T1.6,-,-,-,-	
...3		AA63-10007C	BAND-PP;W18,CLEA,1G	S.N.A
..2	T0053	AA67-00116B	SCREEN FRESNEL;53,1125*854,T2	
..2	T0110	AA67-00130A	SUN SCREEN-AG;54J8,1125*853*,T=82%,G=110	
..2	T0056	AA67-00199A	SCREEN-TINT;54,1123*852,P=0.5,DNP	
..2	T0069	AA60-00091A	SPACER-FELT;-,FELT,150X10,-,-,BLK,T0.35,	S.N.A

ASSY COVER REAR

1	M0002	BP90-00143E	ASSY COVER REAR;ST54T8PCS/XAX,P55A	S.N.A
..2	T0081	6002-000522	SCREW-TAPPING;TH,+,2,M4,L15,ZPC(BLK),SWR	
..2	T0081	6002-000522	SCREW-TAPPING;TH,+,2,M4,L15,ZPC(BLK),SWR	
..2	T0081	6002-000522	SCREW-TAPPING;TH,+,2,M4,L15,ZPC(BLK),SWR	
..2	T0081	6002-000522	SCREW-TAPPING;TH,+,2,M4,L15,ZPC(BLK),SWR	
..2	T0081	6002-000522	SCREW-TAPPING;TH,+,2,M4,L15,ZPC(BLK),SWR	
..2	T0081	6002-000522	SCREW-TAPPING;TH,+,2,M4,L15,ZPC(BLK),SWR	
..2	T0081	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
..2	HC+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18	S.N.A
..2	HC+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18	AS.N.A
..2	HC+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18	AS.N.A
..2	HC+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18	AS.N.A
..2	HC+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18	AS.N.A
..2		AA61-01134A	HOLDER-MIRROR,BOT;43,54T6,HIPS HB,BLK	S.N.A
..2	T0112	AA64-01379B	CABINET-BACK,TOP;54J8,HIPS,-,-,-,HB,BLK,	
...3		0103-001229	RESIN-HIPS;HR-1360,GRY,C7425,HB	S.N.A
..2	CBT	AA64-60449B	INLAY-COVER;SP-434JMF,PS,T0.5,149.3X69.5	S.N.A
..2		AA65-30008A	CLAMPER CORE-CORD;-,PE,HB,-,BLK,-	S.N.A
..2	T0068	AA91-00661A	ASSY-BRKT,MIRROR;DP,91-00489B 22KG,54J9	S.N.A
...3	T0068	AA91-00489B	ASSY-BRKT,MIRROR;-,-,SECC-1 T1.0,54J8	
....4	T0069	AA60-00073A	SPACER-FELT;54J8,FELT,-,-,-,-,T1.0,-,210	S.N.A
....4		AA61-00512B	BRACKET-MIRROR;43,53,61J8,SECC-1,T1.0,-,	S.N.A

Loc. No.		Code No.	Description ; Specification	Remark
..2		AA91-00887A	ASSY-HOLDER,MIRROR(R);,HIPS HB BLK,INLAY	S.N.A
...3		AA61-00873A	HOLDER-MIRROR,R;54J8,HIPS HB,BLK	S.N.A
...3		AA64-00263H	INLAY-FORM;54J8,PVC FORM,T2.0,BLK,220X7	S.N.A
..2		AA91-00887B	ASSY-HOLDER,MIRROR(L);,HIPS HB BLK,INLAY	S.N.A
...3		AA61-00873B	HOLDER-MIRROR,L;54J8,HIPS HB,BLK	S.N.A
...3		AA64-00263H	INLAY-FORM;54J8,PVC FORM,T2.0,BLK,220X7	S.N.A
..2	T0062	BP61-00180C	HOLDER-POWER;HIPS,T8,Q7,V0,BLK	S.N.A
..2	T0015	BP64-00262A	CABINET BACK-BOT;DP,BP64-00152A,54T8,HIP	S.N.A
...3	T0112	BP64-00152A	CABINET-BACK,BOT;54T8,HIPS,HB,BLK	
..2		BP64-00263A	CABINET BACK-SIDE R;DP,BP64-00153A,54T8,	S.N.A
...3	T0014	BP64-00153A	CABINET-BACK,SIDE R;54T8,HIPS,HB,BLK	
..2		BP64-00264A	CABINET BACK-SIDE L;DP,BP64-00153B,54T8,	S.N.A
...3	T0015	BP64-00153B	CABINET-BACK SIDE L;54T8,HIPS,,,,HB,BLK,	
..2	T0092	BP96-00077E	ASSY COVER P-TERMINAL,ANT;DP,42W5,HIPS,V	
...3	T0092	BP96-00038A	ASSY COVER P-TERMINAL,ANT;42W5,HIPS V0,B	S.N.A
....4		AA64-02836B	INLAY-TERMINAL,NT;42W5,PS SHEET,T0.5,BLK	S.N.A
....4		AA65-00023A	TERMINAL-BOARD,ANT;,HIPS V0,BLK	S.N.A
..2	T0108	AA67-00080A	MIRROR-BACK;54J8,GLASS,940.5*684.5*674.5	

ASSY CHASSIS

1	M0017	BP91-00926A	ASSY CHASSIS;ST54T8PCS/XAX,P55A	S.N.A
..2		BP91-00801T	ASSY MISC-CHASSIS PACK;ST54T8PCS/XAX,P55	S.N.A
...3	T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
...3	T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
...3	T0070	AA61-01127A	HOLDER-CHASSIS;COMMANDO,HIPS V0,G4309	S.N.A
...3		AA98-01177B	ASSY K/D-P/MATERIAL;PJTV(COMANDO),P55A	S.N.A
....4		AA63-10007C	BAND-PP;W18,CLEA,1G	S.N.A
....4		AA69-01808A	BAG-SHEET;,LDPE(ANTISTATIC),T0.05,950,90	S.N.A
....4		AA69-01403A	WRAP VINYL-PACKING;SKD CHASSIS,LDPE,T0.0	S.N.A
...3	T0097	BP94-00518S	ASSY PCB MISC-PWR DEF;ST54T8PCX/XAX,P55A	
....4		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
....4	T0083	0402-000236	DIODE-RECTIFIER;GI824,400V,5A,-,TP	
....4	T0083	0402-000250	DIODE-RECTIFIER;RG4C,1000V,1A,-	
....4	DZS801	0406-001007	DIODE-TVS;P6KE180A,171/180/189V,600W,CAS	
....4	T0090	0502-000405	TR-POWER;-,NPN,70W,TO-220,BK,10	
⚠ 4	PC811S	0604-001032	PHOTO-COUPLER;TR,170-260%,300mW,DIP-4,ST	
⚠ 4	PC801S	0604-001032	PHOTO-COUPLER;TR,170-260%,300mW,DIP-4,ST	
....4	DU410	1201-000191	IC-OP AMP;4558,DIP,8P,300MIL,DUAL,20V/mV	
....4	IC012	1203-000162	IC-POSI.ADJUST REG.;317,TO-220,3P,-,PLAS	
....4	T0086	1203-000610	IC-PWM CONTROLLER;494,DIP,16P,300MIL,PLA	
....4	T0123	1203-001006	IC-VOLTAGE REGULATOR;78R05,TO-220F,4P,-,	
....4	IC851	1203-001400	IC-POWER PRESCALER;SE110N,T0-220(SIP),3P	
....4	T0086	1203-002177	IC-PWM CONTROLLER;VIPER12ADIP,DIP,8P,300	
⚠ 4	NT801S	1404-001195	THERMISTOR-NTC;5.1ohm,15%,2900,27mW/C,BK	
⚠ 4	VX801S	1405-000187	VARISTOR;750V,1250A,12.5x7mm,TP	
....4	R384	2002-001079	R-COMPOSITION;470Kohm,5%,1/2W,AA,TP,4x10	
....4	C598	2201-000446	C-CERAMIC,DISC;3.3NF,20%,400V,Y5U,TP,15X	
....4	C598	2201-000446	C-CERAMIC,DISC;3.3NF,20%,400V,Y5U,TP,15X	
....4	C598	2201-000446	C-CERAMIC,DISC;3.3NF,20%,400V,Y5U,TP,15X	
....4	C598	2201-000446	C-CERAMIC,DISC;3.3NF,20%,400V,Y5U,TP,15X	
....4	C598	2201-000963	C-CERAMIC,DISC;1NF,20%,400V,Y5U,TP,9.5X6	
....4	C598	2201-000963	C-CERAMIC,DISC;1NF,20%,400V,Y5U,TP,9.5X6	
⚠ 4	CR471S	2301-001091	C-FILM,MPPF;470nF,5%,400V,TP,26x21.5x14.	
⚠ 4	CR431S	2301-001343	C-FILM,MPPF;3.9nF,5%,2kV,TP,29x9.5x16mm,	
⚠ 4	CR430S	2301-001343	C-FILM,MPPF;3.9nF,5%,2kV,TP,29x9.5x16mm,	
⚠ 4	CX801S	2306-000112	C-FILM,MPPF;100nF,20%,250V,BK,-,15mm	
⚠ 4	CX802S	2306-000112	C-FILM,MPPF;100nF,20%,250V,BK,-,15mm	
⚠ 4	CR436S	2306-000235	C-FILM,MPPF;560nF,5%,400V,TP,26*22.5*14,	
....4	C491	2306-000322	C-FILM,MPPF;12nF,5%,1.6KV,TP,29x20.5x13,	
⚠ 4	CR473S	2306-000322	C-FILM,MPPF;12nF,5%,1.6KV,TP,29x20.5x13,	
....4	C832	2306-000323	C-FILM,MPPF;2.2nF,5%,1.6KV,TP,28.5x15.5x	
⚠ 4	CR474S	2306-000326	C-FILM,MPPF;4.7nF,5%,1.6KV,TP,28.5x16x9m	
....4	C701	2401-000142	C-AL;1000uF,20%,16V,WT,TP,10x20,5	
....4	C701	2401-000701	C-AL;2200uF,20%,250V,GP,-,35x70mm,1	
....4	C701	2401-000701	C-AL;2200uF,20%,250V,GP,-,35x70mm,1	
....4	C701	2401-000787	C-AL;220uF,20%,160V,GP,TP,16x31.5mm	
....4	C701	2401-002251	C-AL;470uF,20%,200V,GP,BK,25x40mm,1	
....4	C701	2401-003076	C-AL;3300UF,20%,50V,WT,BK,18X35.5MM,7.5	
....4	C701	2401-003076	C-AL;3300UF,20%,50V,WT,BK,18X35.5MM,7.5	
....4	C701	2401-003076	C-AL;3300UF,20%,50V,WT,BK,18X35.5MM,7.5	
....4	T0121	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
⚠ 4	FP801S	3601-000300	FUSE-CARTRIDGE;250V,6.3A,SLOW-BLOW,GLASS	
....4	CN906	3711-003043	CONNECTOR-HEADER;BOX,4P,1R,2.5MM,STRAIGH	

Loc. No.		Code No.	Description ; Specification	Remark
⚠ 4	T432	AA26-00053A	TRANS;-,-,-,1.2mH,-,-,-,-,-,-,31.5KHZ,-,	
⚠ 4	T481	AA26-00091A	TRANS-HV-STORAGE;4mH,-,14P,830uH,180V,10	
⚠ 4	T444S	AA26-00100A	TRANS FBT;FFA97513L,CT29A7DR,0.3mH,-,-,-	
⚠ 4	T431	AA26-50001U	TRANS-HORIZ.DRIVE;-,-,-,28mH,-,-,105uH,-	
⚠ 4	T461	AA26-50001V	TRANS-HORIZ.DRIVE;-,-,-,6.0mH,-,-,113uH,	
....4	L432	AA27-00056A	COIL HORIZ. WIDTH;-,600uH,YL9N 15x27.5 C	
....4	L862	AA27-10001C	COIL CHOKE;-,100uH,K,-,5.0A,ST,700UH-K(R	
....4	L863	AA27-10001C	COIL CHOKE;-,100uH,K,-,5.0A,ST,700UH-K(R	
....4	L864	AA27-10002L	COIL CHOKE;-,24uH,K,-,2A,-,24UH-K,10x10m	
⚠ 4	LR401S	AA27-30003M	COIL LINEARITY;-,5uH,OWA14x15,USRC0.1x60	
⚠ 4	LX801S	AA29-30002L	FILTER LINE NOISE;-,10mHMIN,5A,AC90~260V	
⚠ 4	LX804S	AA29-30002M	FILTER LINE NOISE;-,1mHMIN,5A,AC90~260V,	
⚠ 4	LX803S	AA29-30002M	FILTER LINE NOISE;-,1mHMIN,5A,AC90~260V,	
⚠ 4	LX802S	AA29-30002M	FILTER LINE NOISE;-,1mHMIN,5A,AC90~260V,	
....4	T0076	AA39-00180A	LEAD CONNECTOR-ASSY;,14P,100MM,YBNH250-1	
....4	GT01	AA60-40012D	PIN-GT,ASSY;T1.6,6-12.5-,NYLON66	S.N.A
....4	D856	AA96-00243E	ASSY H/S;-,SOUND,AA62-00045A,FMG-G26S	S.N.A
....4	D855	AA96-00243E	ASSY H/S;-,SOUND,AA62-00045A,FMG-G26S	S.N.A
.....5		0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
.....5	T0083	0402-000231	DIODE-RECTIFIER;FMG-G26S,600V,4A,TO-220F	
.....5	T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
.....5		AA62-00045A	HEAT SINK-PS;-,-,T1.0,-,-,DREAM,-,-,-,-,	S.N.A
....4	Q433	AA96-00243H	ASSY H/S;-,POWER,AA62-00045A,KSD73Y,C17A	S.N.A
.....5		0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
.....5	T0090	0502-000298	TR-POWER;KSD73,NPN,30000mW,TO-220,TP,120	
.....5	T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
.....5		AA62-00045A	HEAT SINK-PS;-,-,T1.0,-,-,DREAM,-,-,-,-,	S.N.A
⚠ 4	IC831S	AA96-00275Q	ASSY H/S;,-,AA62-00051A,STR-X6459,K55A	S.N.A
.....5	T0081	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
.....5	T0081	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
.....5	CIS	AA62-00051A	HEAT SINK-PS;-,-,-,SILVER,HOLE 31mm,ALL,	S.N.A
.....5	CIS	AA62-30177A	HEAT SINK-PN;-,CUS-1,T1.0,-,KCV12D,-,-,1	S.N.A
.....5	IC063	BP13-00004A	IC HYBRID;STR-X6459A,COMMANDO,7,-20 TO +	
.....5	CIS	0205-001027	OIL-SILICON;G746,-,-	S.N.A
⚠ 4	D811S	AA96-00276A	ASSY H/S;-,BRIDGE,AA62-00052A,RBV606,WAS	S.N.A
.....5		0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
.....5	T0083	0402-000549	DIODE-BRIDGE;RBV606,600V,6A,-,BK	
.....5	T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
.....5		AA60-30003A	WASHER;T1.5,SBHG-1	S.N.A
.....5		AA62-00052A	HEAT SINK-PS;-,-,-,SILVER,HOLE 18.5mm, 2	S.N.A
⚠ 4	IC421	AA96-00475B	ASSY H/S;SILICON-OIL,FMLG-12S(4),AA62-00	S.N.A
.....5		0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
.....5	T0083	0402-000233	DIODE-RECTIFIER;FML-G12S,200V,5A,-,-	
.....5	IC012	1203-000165	IC-POSI.ADJUST REG.;78R12,TO-220,4P,-,PL	
.....5	T0081	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
.....5		AA62-00066B	HEAT SINK;D2,D3,AL ,T1.0,89,70,-,AA62-00	S.N.A
....4	IC301	AA96-00623A	ASSY H/S;-,POWER,AA62-00056A,LA7845	S.N.A
.....5		0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
.....5	T0088	1204-000517	IC-VERTICAL DEF.;LA7845,SIP,7P,-,PLASTIC	
.....5	T0081	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
.....5		AA62-00056A	HEAT SINK-PS;-,-,T1.0,-,41*35*70,D2,-,-,	S.N.A
....4	Q431	BH99-00033H	ASSY HEAT/SINK;BH62-00038A,SPRING,FJL692	S.N.A
.....5	T0083	0402-001296	DIODE-RECTIFIER;FMP-3FU,1.5KV,5A,TO-3PF,	
.....5	T0060	BH61-70003A	SPRING ETC;CVT4857,STS304-W1/2H,W3.8,-,L	S.N.A
.....5	T0090	0502-001230	TR-POWER;FJL6920YDTU,N,200000MW,TO-264 F	
.....5	CIS	BH62-00038B	HEAT SINK-FBT;COMMANDO,A1050S,T2.0,85*80	S.N.A
.....5	CIS	BH73-00028A	SILICON/RUBBER-HS;CDT ALL,SILICON,26*33*	S.N.A
.....5	CIS	0205-001027	OIL-SILICON;G746,-,-	S.N.A
⚠ 4	TS801S	BP26-00001A	TRANS SWITCHING-POWER;19B012,P55A,HCM421	
⚠ 4	T801S	BP26-00006A	TRANS SWITCHING;EER5345,P55A,HCM4215W,80	
....4	T0076	BP39-00014A	LEAD CONNECTOR-ASSY;P55A/HCM4215W,UL1007	
....4		BP39-00084A	LEAD CONNECTOR;HCL4715WB,UL1617#22,UL/CS	
....4	Q473	BP96-00006B	ASSY HEAT SINK P;HS,SCREW,IRF640B,2SC412	S.N.A
.....5	CIS	0205-001027	OIL-SILICON;G746,-,-	S.N.A
.....5	T0090	0502-001100	TR-POWER;2SC4125,NPN,70W,TO-3PML,BK,8-	
.....5	Q409	0505-001722	FET-SILICON;IRFS640B,N,200V,18A,0.18OHM,	
.....5	T0081	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
.....5	CIS	AA60-30001A	WASHER-PLATE;M3,ID3.5,15X8.5,T1.0,SBHG	S.N.A
.....5	CIS	BP62-00001A	HEAT SINK;COMMANDO,A1050P,T2.0,W62.0,H50	S.N.A
....4		BP97-00511P	ASSY AUTO;ST54T8PCX/XAX,P55A	S.N.A
.....5	D477	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.....5	D478	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.....5	D479	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
⚠ 5	DR401S	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
⚠ 5	DR402S	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.....5	D301	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.....5	D385	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 D436	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.....5 D442	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.....5 D443	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.....5 DS804	0401-000006	DIODE-SWITCHING;BAV21,250V,250mA,DO-35,T	
.....5 DS802	0401-000006	DIODE-SWITCHING;BAV21,250V,250mA,DO-35,T	
.....5 T0083	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
.....5 T0083	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
.....5 T0083	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
.....5 T0083	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
.....5 T0083	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
.....5 T0083	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
.....5 T0083	0402-000254	DIODE-RECTIFIER;RGP10J,600V,1A,DO-41,TP	
.....5 T0083	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
.....5 T0083	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
.....5 T0083	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
.....5 T0083	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
.....5 T0083	0402-000537	DIODE-RECTIFIER;RH1A,600V,0.6A,DO-204AC	
.....5 T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
.....5 T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
.....5 T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
.....5 T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
.....5 T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
.....5 T0083	0402-001286	DIODE-RECTIFIER;RP1H,2000V,.1A,-,TP	
.....5 DZ016	0403-000698	DIODE-ZENER;TZP12A,12V,11.4-12.6V,1W,DO-	
.....5 DZ016	0403-000704	DIODE-ZENER;TZP7.5B,7.5V,7.5-8.4V,1W,DO-	
.....5 DZ016	0403-000716	DIODE-ZENER;MTZJ4.7B,4.7V,4.55-4.8V,500m	
.....5 DZ016	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
.....5 DZ016	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
.....5 DZ016	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
.....5 DZ016	0403-000734	DIODE-ZENER;TZP15B,15V,14.7-16.5V,1W,DO-	
.....5 DZ016	0403-001167	DIODE-ZENER;MTZJ30D,30V,29.02-30.51V,500	
.....5 DZ016	0403-001316	DIODE-ZENER;MTZJ3.0A,2.85-3.07V,500mW,DO	
.....5 DZ016	0403-001319	DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	
.....5 DZ016	0403-001319	DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	
.....5 DZ016	0403-001325	DIODE-ZENER;MTZJ15C,14.35-15.09V,500mW,D	
.....5 DZ016	0403-001325	DIODE-ZENER;MTZJ15C,14.35-15.09V,500mW,D	
.....5 DZ016	0403-001325	DIODE-ZENER;MTZJ15C,14.35-15.09V,500mW,D	
.....5 DZ016	0403-001327	DIODE-ZENER;MTZJ18A,16.22-17.06V,500mW,D	
.....5 DZ016	0403-001327	DIODE-ZENER;MTZJ18A,16.22-17.06V,500mW,D	
.....5 DZ016	0403-001327	DIODE-ZENER;MTZJ18A,16.22-17.06V,500mW,D	
.....5 DZ016	0403-001328	DIODE-ZENER;MTZJ22A,20.15-21.20V,500mW,D	
.....5 DZ016	0403-001329	DIODE-ZENER;MTZJ24B,22.61-23.77V,500mW,D	
.....5 DZ016	0403-001329	DIODE-ZENER;MTZJ24B,22.61-23.77V,500mW,D	
.....5 DZ016	0403-001330	DIODE-ZENER;MTZJ30A,26.99-28.39V,500mW,D	
.....5 DZ016	0403-001330	DIODE-ZENER;MTZJ30A,26.99-28.39V,500mW,D	
.....5 DS805	0404-001056	DIODE-SCHOTTKY;RK16,60V,1.5A,DO-204AC,TP	
.....5 QR401S	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
.....5 Q482	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
.....5 Q432	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
.....5 Q461	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q471	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q474	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q481	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q851	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 QS801	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 QS802	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q301	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q381	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q382	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q401	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q402	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q421	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q451	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q409	0505-001723	FET-SILICON;FQP630TSTU,N,200V,9A,0.4OHM,	
.....5 Q409	0505-001723	FET-SILICON;FQP630TSTU,N,200V,9A,0.4OHM,	
.....5 IC012	1203-001217	IC-POSI.ADJUST REG.;431,TO-92,3P,4.58MIL	
⚠ 5 VP801S	1405-000152	VARISTOR;560V,2500A,14x8.5mm,TP	
.....5 R125	2001-000005	R-CARBON;390ohm,5%,1/8W,AA,TP,1.8x3.2mm	
.....5 R125	2001-000006	R-CARBON;2.4KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R308	2001-000016	R-CARBON(S);1OHM,5%,1/2W,AA,TP,2.4X6.4MM	
.....5 R470	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R422	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R493	2001-000052	R-CARBON(S);3.3KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R836	2001-000052	R-CARBON(S);3.3KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 RS808	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 RS804	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R855	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 RS803	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R814	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R813	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R812	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R811	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R439	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R438	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R834	2001-000109	R-CARBON(S);470OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R125	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000262	R-CARBON;1.8MOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000508	R-CARBON;220KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000554	R-CARBON;270OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000745	R-CARBON;4.7OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000761	R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000761	R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000761	R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000761	R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000761	R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000800	R-CARBON;5.1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000800	R-CARBON;5.1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-001031	R-CARBON;91KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R840	2001-001045	R-CARBON(S);1.2KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 RS807	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
⚠ 5 RR401S	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
.....5 R854	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
.....5 R839	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
.....5 R434	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
.....5 R413	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
.....5 R837	2001-001108	R-CARBON(S);22KOHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R468	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 RS802	2001-001124	R-CARBON(S);3.9OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R431	2001-001153	R-CARBON(S);47OHM,5%,1/2W,AA,TP,2.4X6.4M	
.....5 R433	2001-001155	R-CARBON(S);5.6KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R410	2001-001155	R-CARBON(S);5.6KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 RS806	2001-001168	R-CARBON(S);6.8KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R459	2001-001192	R-CARBON(S);820OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R851	2001-001196	R-CARBON(S);9.1KOHM,5%,1/2W,AA,TP,2.4X6.	
⚠ 5 RP801S	2002-001010	R-COMPOSITION;1.8Mohm,5%,1/2W,AA,TP,3.7x	
⚠ 5 RY801S	2002-001013	R-COMPOSITION;4.7Mohm,5%,1/2W,AA,TP,3.7x	
.....5 R428A	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
.....5 R428	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
.....5 R425	2003-000417	R-METAL OXIDE(S);1.2Kohm,5%,3W,AA,TP,6x1	
.....5 R832	2003-000512	R-METAL OXIDE(S);15Kohm,5%,3W,AA,TP,6x16	
.....5 R831	2003-000512	R-METAL OXIDE(S);15Kohm,5%,3W,AA,TP,6x16	
.....5 R430	2003-000586	R-METAL OXIDE(S);22Kohm,5%,2W,AF,TP,4x12	
.....5 R429	2003-000586	R-METAL OXIDE(S);22Kohm,5%,2W,AF,TP,4x12	
.....5 R310	2003-001024	R-METAL OXIDE(S);150ohm,5%,2W,AF,TP,3.9x	
.....5 R463	2003-001024	R-METAL OXIDE(S);150ohm,5%,2W,AF,TP,3.9x	
.....5 R460	2003-002044	R-METAL OXIDE(S);100ohm,5%,1W,AF,TP,2.5x	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 R841	2003-002102	R-METAL OXIDE(S);68Kohm,5%,2W,AF,TP,4x12	
.....5 R427	2003-002152	R-METAL OXIDE;1OHM,5%,2W,AG,TP,6X16MM	
.....5 R427A	2003-002152	R-METAL OXIDE;1OHM,5%,2W,AG,TP,6X16MM	
.....5 R426	2003-002153	R-METAL OXIDE;4.7OHM,5%,2W,AG,TP,6X16MM	
.....5 R443A	2003-002156	R-METAL OXIDE;560OHM,5%,2W,AG,TP,6X16MM	
.....5 R443	2003-002156	R-METAL OXIDE;560OHM,5%,2W,AG,TP,6X16MM	
.....5 R464	2003-002158	R-METAL OXIDE;0.68OHM,5%,1W,AG,TP,4.3X12	
.....5 R421	2003-002159	R-METAL OXIDE;150OHM,5%,1W,AG,TP,4.3X12M	
.....5 R801	2003-002285	R-METAL OXIDE(S);1.5KOHM,5%,2W,AF,TP,6X1	
.....5 R408	2004-000531	R-METAL;20Kohm,1%,1/2W,AA,TP,3.3x9mm	
.....5 R024	2004-001369	R-METAL(S);1.2Kohm,1%,1/2W,AA,TP,2.4x6.4	
.....5 R024	2004-001386	R-METAL(S);16.9Kohm,1%,1/2W,AA,TP,2.4x6.	
.....5 R024	2004-001395	R-METAL(S);330Kohm,2%,1/2W,AA,TP,2.4x6.4	
.....5 R024	2004-001402	R-METAL(S);6.8Kohm,1%,1/2W,AA,TP,2.4x6.4	
.....5 R024	2004-001408	R-METAL(S);91Kohm,1%,1/2W,AA,TP,2.4x6.4m	
.....5 R024	2004-001892	R-METAL(S);162Kohm,1%,1/2W,AA,TP,2.5x6.5	
.....5 R024	2004-001892	R-METAL(S);162Kohm,1%,1/2W,AA,TP,2.5x6.5	
.....5 R024	2004-001897	R-METAL(S);43.2Kohm,1%,1/2W,AA,TP,2.5x6.	
.....5 R024	2004-001897	R-METAL(S);43.2Kohm,1%,1/2W,AA,TP,2.5x6.	
.....5 R024	2004-001984	R-METAL(S);26.7Kohm,1%,1/2W,AA,TP,2.4x6.	
.....5 R024	2004-001984	R-METAL(S);26.7Kohm,1%,1/2W,AA,TP,2.4x6.	
.....5 R024	2004-001984	R-METAL(S);26.7Kohm,1%,1/2W,AA,TP,2.4x6.	
.....5 R024	2004-002011	R-METAL(S);110Kohm,1%,1/2W,AA,TP,2.4x6.4	
.....5 R024	2004-004001	R-METAL(S);180Kohm,1%,1/2W,AA,TP,2.5x6.5	
.....5 R024	2004-004029	R-METAL(S);10Kohm,1%,1/2W,AA,TP,2.5x6.5m	
.....5 R024	2004-004046	R-METAL(S);430Kohm,1%,1/2W,AA,TP,2.5x6.5	
.....5 R024	2004-004046	R-METAL(S);430Kohm,1%,1/2W,AA,TP,2.5x6.5	
.....5 R024	2004-004366	R-METAL(S);1.3Kohm,1%,1/2W,AA,TP,2.5x6.5	
.....5 R024	2004-005051	R-METAL(S);2.2KOHM,1%,1/2W,AA,TP,2.4X6.4	
.....5 R472	2008-000252	R-FUSIBLE(S);0.47ohm,10%,1/2W,AF,TP,2.5x	
.....5 R465	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
.....5 R449	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
.....5 R447	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
.....5 R445	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
.....5 R441	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
.....5 R442	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
.....5 R442A	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
.....5 R440	2008-000282	R-FUSIBLE;0.47ohm,5%,1W,AA,TP,3.9x12mm	
.....5 R424	2008-000289	R-FUSIBLE(S);1ohm,5%,1W,AA,TP,3.9x10mm	
.....5 R307	2008-000290	R-FUSIBLE(S);2.4ohm,5%,2W,AF,TP,3.9x10mm	
.....5 R486	2008-001018	R-FUSIBLE(S);0.47ohm,10%,2W,AF,TP,3.9x10	
.....5 R838	2008-001053	R-FUSIBLE;22ohm,5%,1/2W,AF,TP,2.5x6.5mm	
.....5 R306	2008-001076	R-FUSIBLE(S);1.8ohm,5%,2W,AF,TP,3.9x10mm	
.....5 R437	2008-001087	R-FUSIBLE(S);1.8ohm,5%,2W,AG,TP,3.9x12mm	
.....5 R485	2008-001137	R-FUSIBLE(S);3.3ohm,5%,1W,AF,TP,3.9x10mm	
.....5 R462	2008-001145	R-FUSIBLE;4.7OHM,5%,1/2W,AF,TP,2.5X6.5MM	
.....5 R853	2008-001152	R-FUSIBLE(S);1.3KOHM,5%,1/2W,AA,TP,2.5X6	
.....5 R833	2009-001096	R-METAL PLATE;0.07ohm,5%,5W,CL,BK,5x14x1	
.....5 R405	2009-001109	R-TEMPERATURE;240ohm,5%,1/4W,AA,TP,2.3x6	
⚠ 5 RR471S	2103-001024	VR-SEMI;50Kohm,25%,0.3W,TOP	
⚠ 5 RR402S	2103-001086	VR-SEMI;100KOHM,25%,0.3W,TOP	
.....5 C598	2201-000017	C-CERAMIC,DISC;1NF,10%,50V,Y5P,TP,5X3.5M	
.....5 C598	2201-000017	C-CERAMIC,DISC;1NF,10%,50V,Y5P,TP,5X3.5M	
.....5 C598	2201-000017	C-CERAMIC,DISC;1NF,10%,50V,Y5P,TP,5X3.5M	
.....5 C598	2201-000119	C-CERAMIC,DISC;100NF,+80-20%,50V,Y5V,TP,	
.....5 C598	2201-000119	C-CERAMIC,DISC;100NF,+80-20%,50V,Y5V,TP,	
.....5 C598	2201-000119	C-CERAMIC,DISC;100NF,+80-20%,50V,Y5V,TP,	
.....5 C598	2201-000119	C-CERAMIC,DISC;100NF,+80-20%,50V,Y5V,TP,	
.....5 C598	2201-000132	C-CERAMIC,DISC;0.1NF,10%,500V,Y5P,TP,6.5	
.....5 C598	2201-000132	C-CERAMIC,DISC;0.1NF,10%,500V,Y5P,TP,6.5	
.....5 C598	2201-000132	C-CERAMIC,DISC;0.1NF,10%,500V,Y5P,TP,6.5	
.....5 C598	2201-000132	C-CERAMIC,DISC;0.1NF,10%,500V,Y5P,TP,6.5	
.....5 C598	2201-000132	C-CERAMIC,DISC;0.1NF,10%,500V,Y5P,TP,6.5	
.....5 C598	2201-000138	C-CERAMIC,DISC;0.1NF,10%,50V,Y5P,TP,4X4M	
.....5 C598	2201-000146	C-CERAMIC,DISC;0.1NF,5%,50V,SL,TP,5X3.5M	
.....5 C598	2201-000146	C-CERAMIC,DISC;0.1NF,5%,50V,SL,TP,5X3.5M	
.....5 C598	2201-000180	C-CERAMIC,DISC;10NF,10%,50V,Y5V,TP,7X3MM	
.....5 C598	2201-000180	C-CERAMIC,DISC;10NF,10%,50V,Y5V,TP,7X3MM	
.....5 C598	2201-000332	C-CERAMIC,DISC;2.2NF,20%,250V,Y5U,TP,9X4	
.....5 C598	2201-000332	C-CERAMIC,DISC;2.2NF,20%,250V,Y5U,TP,9X4	
.....5 C598	2201-000332	C-CERAMIC,DISC;2.2NF,20%,250V,Y5U,TP,9X4	
.....5 C598	2201-000370	C-CERAMIC,DISC;0.22NF,10%,50V,Y5P,TP,4X3	
.....5 C598	2201-000406	C-CERAMIC,DISC;0.27NF,10%,2KV,Y5P,TP,6.3	
.....5 C598	2201-000551	C-CERAMIC,DISC;0.47NF,10%,1KV,Y5P,TP,6.3	
.....5 C598	2201-000551	C-CERAMIC,DISC;0.47NF,10%,1KV,Y5P,TP,6.3	
.....5 C598	2201-000551	C-CERAMIC,DISC;0.47NF,10%,1KV,Y5P,TP,6.3	
.....5 C598	2201-000551	C-CERAMIC,DISC;0.47NF,10%,1KV,Y5P,TP,6.3	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 C598	2201-000551	C-CERAMIC,DISC;0.47NF,10%,1KV,Y5P,TP,6.3	
.....5 C598	2201-000558	C-CERAMIC,DISC;0.47NF,10%,50V,Y5P,TP,5X3	
.....5 C478	2301-000020	C-FILM,PEF;27nF,5%,100V,TP,7.3x4x12.5mm,	
.....5 C479	2301-000200	C-FILM,PEF;2.2nF,5%,200V,TP,11.0x6.0x9.0	
.....5 C477	2301-000213	C-FILM,PEF;220nF,5%,250V,TP,21.5x11,7.5	
.....5 C493	2301-000356	C-FILM,PEF;47nF,5%,50V,TP,7.5x4.0x6.5,5m	
.....5 CS801	2301-000356	C-FILM,PEF;47nF,5%,50V,TP,7.5x4.0x6.5,5m	
.....5 C412	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
.....5 C831	2301-001216	C-FILM,PPF;47nF,5%,630V,TP,20x14.5x22,7.	
.....5 C438	2303-000002	C-FILM,PPF;8.2nF 5% 400V TP 19X18X7,7.5m	
.....5 C432	2303-000002	C-FILM,PPF;8.2nF 5% 400V TP 19X18X7,7.5m	
.....5 C460	2303-000331	C-FILM,PPF;4.7nF,5%,630V,TP,19.5x12x7,7.	
.....5 C311	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
.....5 C487	2305-000178	C-FILM,MPEF;10nF,5%,100V,TP,-,5mm	
.....5 C309	2305-000285	C-FILM,MPEF;220NF,5%,100V,TP,10.5X5.5X15	
.....5 C871	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	
.....5 C838	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
.....5 C865	2305-000427	C-FILM,MPEF;47nF,5%,100V,TP,7.5x12.5x3.5	
.....5 C303	2305-000427	C-FILM,MPEF;47nF,5%,100V,TP,7.5x12.5x3.5	
.....5 C301	2305-000427	C-FILM,MPEF;47nF,5%,100V,TP,7.5x12.5x3.5	
.....5 C429	2305-000704	C-FILM,MPEF;100nF,5%,250V,TP,16.5x10.3x5	
.....5 C480	2306-000122	C-FILM,MPPF;100nF,5%,50V,TP,7.3x4.0x5.0m	
.....5 C428	2306-000122	C-FILM,MPPF;100nF,5%,50V,TP,7.3x4.0x5.0m	
.....5 C701	2401-000025	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
.....5 C701	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
.....5 C701	2401-000164	C-AL;1000uF,20%,25V,WT,TP,12.5x20,5	
.....5 C701	2401-000262	C-AL;100uF,20%,160V,HR,TP,16x25,7.5	
.....5 C701	2401-000262	C-AL;100uF,20%,160V,HR,TP,16x25,7.5	
.....5 C701	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
.....5 C701	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
.....5 C701	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
.....5 C701	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
.....5 C701	2401-000365	C-AL;100uF,20%,50V,WT,TP,10x12.5mm,	
.....5 C701	2401-000365	C-AL;100uF,20%,50V,WT,TP,10x12.5mm,	
.....5 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000603	C-AL;1UF,20%,50V,GP,TP,5X11,2	
.....5 C701	2401-000660	C-AL;2.2uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000698	C-AL;2200uF,20%,16V,WT,TP,12.5x25,5	
.....5 C701	2401-000703	C-AL;2200uF,20%,25V,GP,-,12.5x25mm,	
.....5 C701	2401-001026	C-AL;3.3UF,20%,50V,GP,TP,5X11,5	
.....5 C701	2401-001026	C-AL;3.3UF,20%,50V,GP,TP,5X11,5	
.....5 C701	2401-001192	C-AL;33uF,20%,50V,GP,TP,6.3x11,5	
.....5 C701	2401-001397	C-AL;470uF,20%,25V,GP,TP,10x16,5	
.....5 C701	2401-001428	C-AL;470uF,20%,50V,GP,TP,10x20,5	
.....5 C701	2401-001486	C-AL;47uF,20%,160V,HR,TP,13x20mm,5m	
.....5 C701	2401-001527	C-AL;47uF,20%,250V,HR,TP,13x25mm,5m	
.....5 C701	2401-001622	C-AL;6.8uF,20%,50V,BP,TP,16x25mm,7.	
.....5 C701	2401-001625	C-AL;6.8uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-001655	C-AL;680uF,20%,25V,GP,TP,10x20,5	
.....5 C701	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
.....5 C701	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
.....5 C701	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
.....5 C701	2401-002216	C-AL;2200uF,20%,35V,GP,TP,16x25,7.5	
.....5 C701	2401-002216	C-AL;2200uF,20%,35V,GP,TP,16x25,7.5	
.....5 C701	2401-002288	C-AL;470uF,20%,25V,WT,TP,10x20,5	
.....5 C701	2401-002288	C-AL;470uF,20%,25V,WT,TP,10x20,5	
.....5 C701	2401-002300	C-AL;47uF,20%,50V,GP,TP,6.3x11,5	
.....5 C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
.....5 C701	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
.....5 C701	2401-003114	C-AL;4.7uF,20%,250V,WT,TP,10x16,5	
.....5 L431	2701-000116	INDUCTOR-AXIAL;10uH,10%,4.2x9.8mm	
.....5 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
.....5 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
.....5 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
.....5 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
.....5 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
.....5 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
.....5 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
.....5 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
.....5 F101	2901-000299	FILTER-EMI ON BOARD;-,6A,UL/CSA,-,9x7.5,	
.....5 G101	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
.....5 G101	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
.....5 G101	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
.....5 G101	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
.....5 G101	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 G101	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
.....5 G101	3301-000374	CORE-FERRITE BEAD;AA,3.5x1.0x9.0mm,-,-	
.....5 G101	3301-000374	CORE-FERRITE BEAD;AA,3.5x1.0x9.0mm,-,-	
⚠ 5 RS801S	3601-000102	FUSE-AXIAL LEAD;125V,1A,FAST-ACTING,GLAS	
⚠ 5 FD801S	3601-000120	FUSE-AXIAL LEAD;125V,2.5A,FAST-ACTING,GL	
⚠ 5 FD871S	3601-001086	FUSE-AXIAL LEAD;125V,5A,FAST-ACTING,GLAS	
⚠ 5 FD854S	3601-001086	FUSE-AXIAL LEAD;125V,5A,FAST-ACTING,GLAS	
⚠ 5 FD805S	3601-001086	FUSE-AXIAL LEAD;125V,5A,FAST-ACTING,GLAS	
⚠ 5 FD802S	3601-001228	FUSE-AXIAL LEAD;125V,10A,FAST-ACTING,EPO	
⚠ 5 FD855S	3601-001228	FUSE-AXIAL LEAD;125V,10A,FAST-ACTING,EPO	
.....5 F801B	3602-000114	FUSE-HOLDER;-,-,30mohm	
.....5 F801A	3602-000114	FUSE-HOLDER;-,-,30mohm	
.....5 CN906	3711-002645	CONNECTOR-HEADER;BOX,6P,1R,2.5mm,STRAIGH	
.....5 EY52	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EY53	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EY54	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EY55	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EY51	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EY42	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EY41	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EY40	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EY63	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EY62	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EY61	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EY60	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EY59	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EY58	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EY57	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EY56	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EL08	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EL07	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EL06	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EL05	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EL04	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EL03	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EL02	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EL01	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EY39	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EL16	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EL15	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EL14	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EL10	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EL11	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EL12	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EL13	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EY37	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY38	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY43	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY44	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY36	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY35	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY34	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY32	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY66	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY65	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY64	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY50	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY49	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY47	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY46	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY45	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY23	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY22	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY21	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY20	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY19	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY18	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY17	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY16	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY31	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY30	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY29	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY28	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY27	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY26	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY25	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY24	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A

Loc. No.	Code No.	Description ; Specification	Remark
.....5 EY67	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY91	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY90	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY89	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY88	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY87	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY86	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY85	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY84	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY99	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY98	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY97	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY96	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY95	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY94	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY93	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY92	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY75	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY74	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY73	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY72	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY71	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY70	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY69	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY68	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY83	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY82	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY81	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY80	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY79	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY78	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY77	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY76	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY114	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY113	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY111	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY11	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY109	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY108	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY107	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY106	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY121	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY120	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY12	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY119	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY118	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY117	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY116	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY115	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY08	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY07	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY06	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY05	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY04	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY03	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY02	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY01	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY105	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY104	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY103	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY102	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY101	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY100	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY10	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY09	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY122	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY148	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY147	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY142	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY141	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY140	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY14	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY139	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY138	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY155	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY154	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY153	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A

Loc. No.	Code No.	Description ; Specification	Remark
.....5 EY152	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY151	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY150	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY15	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY149	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY13	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY129	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY128	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY127	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY126	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY125	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY124	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY123	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY137	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY136	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY135	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY134	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY130	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY131	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY132	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY133	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 0	AA41-00598D	PCB-SUB;HCM4215W,CEM-1,1L,D,1.6T,330X245	S.N.A
.....5 GT404	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT433	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT801	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT802	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT807	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT810	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT811	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT14	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT15	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT16	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT17	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT33	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT34	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT35	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
...3 T0073	BP94-00519A	ASSY PCB MAIN;ST54T8PCS/XAX,P55A,MEXICO	
....4	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
....4 IC802	1203-000119	IC-NEGA.FIXED REG.;7905,TO-220,3P,-,PLAS	
....4 IC012	1203-000165	IC-POSI.ADJUST REG.;78R12,TO-220,4P,-,PL	
....4 C701	2401-000737	C-AL;2200uF,20%,50V,GP,TP,18x35.5,7	
....4 C701	2401-001068	C-AL;3300uF,20%,50V,GP,BK,22x40,10	
....4 X601	2801-004020	CRYSTAL-UNIT;18.432MHz,30ppm,28-AAM,12pF	
....4 CNZ01	3703-001150	CONNECTOR-BACK PANEL;32P,2R,FEMALE,STRAI	
....4 CNW02	3703-001150	CONNECTOR-BACK PANEL;32P,2R,FEMALE,STRAI	
....4 CNW01	3703-001150	CONNECTOR-BACK PANEL;32P,2R,FEMALE,STRAI	
....4 CN901	3703-001187	CONNECTOR-BACK PANEL;64P,2R,FEMALE,STRAI	
....4 CN906	3711-003046	CONNECTOR-HEADER;BOX,9P,1R,2.5MM,STRAIGH	
....4 CN906	3711-003641	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,STRAIG	
....4 CN906	3711-003973	CONNECTOR-HEADER;BOX,11P,1R,2.5mm,STRAIG	
....4 CN906	3711-003975	CONNECTOR-HEADER;BOX,14P,1R,2.5mm,STRAIG	
....4 CN906	3711-004946	CONNECTOR-HEADER;BOX,15P,1R,2.5MM,STRAIG	
....4 JA703	3722-001163	JACK-VHS;4P,12mm,AU,BLK,N	
....4 JA701	3722-001426	JACK-PIN;9P,3.4mm,NI,BLK,-	
....4 JA704	3722-001870	JACK-PIN;5P(10P),8.3MM,NI,GRN/BLU/RED/WH	
....4 JA702	3722-001871	JACK-PIN;5P(9P),8.3MM,NI,GRN/BLU/RED/WHT	
....4 L802	AA27-10001C	COIL CHOKE;-,100uH,K,-,5.0A,ST,700UH-K(R	
....4 L801	AA29-00004A	FILTER LINE NOISE;-,20UH,3A,AC80-260V,TQ	
....4 T0076	AA39-20010B	LEAD CONNECTOR-ASSY;,1P,500,YFH800-01,S,	
....4 T0076	AA39-20010B	LEAD CONNECTOR-ASSY;,1P,500,YFH800-01,S,	
....4 TU04	AA40-00049A	TUNER;TCPN3081PC19C(S),TCPN3081PC19C(S),	
....4 TU02	AA40-00049A	TUNER;TCPN3081PC19C(S),TCPN3081PC19C(S),	
....4 TU01	AA59-00164A	MODULE-RF,SPLITTER;-,UMX-NT-005,-,2IN/3O	
....4	AA63-00396B	SHIELD CASE-TOP;PRJT,P54A,SPTE,T0.5,-,-,	S.N.A
....4	AA63-00397B	SHIELD CASE-BOT;PRJT,P54A,SPTE,T0.5,-,-,	S.N.A
....4	AA63-00608A	SHIELD CASE;HERCULES TOP,SPTE,T0.5,W140.	S.N.A
....4	AA63-00610A	SHIELD CASE;COMMANDO,SPTE,T0.5,W141.5,H1	S.N.A
....4	AA63-10002A	BAND-TIE;NYLON66 V2,L100,NTR	S.N.A
....4	AA65-30018A	CLAMPER CORE-WIRE;DONG-A,NYLON-66,-,-,-,	S.N.A
....4	AA65-30111A	CLAMPER CORE-WIRE;ALL MODEL,NYLON,V0,-,W	S.N.A
....4 T0104	AA95-02001K	ASSY SUB-PCB MICOM;,C2	
.....5 T0083	0402-000274	DIODE-RECTIFIER;UF4004,400V,1A,DO-41,TP	
.....5 Q409	0505-000109	FET-SILICON;2N7000,N,60V,200mA,5ohm,400m	
.....5 Q409	0505-000109	FET-SILICON;2N7000,N,60V,200mA,5ohm,400m	
.....5 IC904	1203-001943	IC-VOL. DETECTOR;7025,TO-92,3P,-,PLASTIC	
.....5 X901	2801-004071	CRYSTAL-UNIT;6MHZ,30PPM,28-AAM,20PF,40OH	
.....5 CN901	3703-001175	CONNECTOR-BACK PANEL;64P,2R,MALE,ANGLE,A	

Loc. No.	Code No.	Description ; Specification	Remark
.....5	AA97-07275A	ASSY SMD;SVP-47W3HRT,P55A, , ,	S.N.A
.....6D905	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....6D906	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....6D920	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....6D923	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....6D602	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....6D901	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....6D902	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....6DZ016	0403-001375	DIODE-ZENER;RLZ3.6B,3.6-3.845V,500mW,LL-	
.....6DZ016	0403-001375	DIODE-ZENER;RLZ3.6B,3.6-3.845V,500mW,LL-	
.....6DZ016	0403-001375	DIODE-ZENER;RLZ3.6B,3.6-3.845V,500mW,LL-	
.....6DZ016	0403-001375	DIODE-ZENER;RLZ3.6B,3.6-3.845V,500mW,LL-	
.....6DZ016	0403-001375	DIODE-ZENER;RLZ3.6B,3.6-3.845V,500mW,LL-	
.....6DZ016	0403-001375	DIODE-ZENER;RLZ3.6B,3.6-3.845V,500mW,LL-	
.....6DZ016	0403-001375	DIODE-ZENER;RLZ3.6B,3.6-3.845V,500mW,LL-	
.....6Q915	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....6Q916	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....6Q917	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....6Q920	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....6Q914	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....6Q913	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....6Q910	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....6Q908	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....6Q902	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....6IC112	1103-000180	IC-EEPROM;24C16,2Kx8Bit,SOP,8P,150MIL,10	
.....6T0087	1203-002302	IC-POSI.FIXED REG.;78RM33D,D-PAK,3P,-,PL	
.....6IC901	1204-001912	IC-DECODER;SDA5550M,P-MQFP,100P,-,PLASTI	
.....6R981	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6R964	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6R960	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6R959	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6R965	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6R956	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6R953	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6R952	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6R969	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6R970	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6R972	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6R979	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6R940	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6R909	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6R916	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6R918	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6R939	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6R923	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6R922	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6R907	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6R917	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6R911	2007-000076	R-CHIP;330ohm,5%,1/10W,TP,1608	
.....6R963	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
.....6R901	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
.....6R930	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6R933	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6R936	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6R974	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6R905	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6R921	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6R924	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6R925	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6R915	2007-000081	R-CHIP;2.7Kohm,5%,1/10W,TP,1608	
.....6R913	2007-000081	R-CHIP;2.7Kohm,5%,1/10W,TP,1608	
.....6R912	2007-000081	R-CHIP;2.7Kohm,5%,1/10W,TP,1608	
.....6R978	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6R976	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6R971	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6R958	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6R980	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6R982	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6R985	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6R986	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6R903	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6R904	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6R906	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6R908	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6R955	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6R954	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6R928	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
.....6R927	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6R983	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6R934	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6R987	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....6R957	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....6R944	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....6R926	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	
.....6R975	2007-000121	R-CHIP;820ohm,5%,1/10W,TP,1608	
.....6R942	2007-000123	R-CHIP;1.5Kohm,5%,1/10W,TP,1608	
.....6R941	2007-000123	R-CHIP;1.5Kohm,5%,1/10W,TP,1608	
.....6R914	2007-000123	R-CHIP;1.5Kohm,5%,1/10W,TP,1608	
.....6R988	2007-000290	R-CHIP;100ohm,5%,1/8W,TP,2012	
.....6R962	2007-000583	R-CHIP;22Kohm,1%,1/10W,TP,1608	
.....6R961	2007-000939	R-CHIP;47Kohm,1%,1/10W,TP,1608	
.....6C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6C120	2203-000221	C-CERAMIC,CHIP;100nF,20%,50V,Y5V,TP,3216	
.....6C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....6C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....6C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....6C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....6C120	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
.....6C120	2203-000357	C-CERAMIC,CHIP;0.15NF,5%,50V,C0G,TP,1608	
.....6C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....6C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....6C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....6C120	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,-	
.....6C120	2203-000748	C-CERAMIC,CHIP;0.03NF,5%,50V,C0G,TP,2012	
.....6C120	2203-000748	C-CERAMIC,CHIP;0.03NF,5%,50V,C0G,TP,2012	
.....6C120	2203-001048	C-CERAMIC,CHIP;0.56NF,10%,50V,C0G,TP,201	
.....6C120	2203-005809	C-CERAMIC,CHIP;1000nF,10%,16V,X7R,TP,201	
.....6C950	2402-000179	C-AL,SMD;47uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....6C936	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....6C921	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....6C918	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....6C915	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....6C913	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....6C938	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....6C917	2402-001049	C-AL,CHIP;10uF,20%,16V,GP,TP,3.3x3.3x5.4	
.....6C912	2402-001049	C-AL,CHIP;10uF,20%,16V,GP,TP,3.3x3.3x5.4	
.....6C911	2402-001049	C-AL,CHIP;10uF,20%,16V,GP,TP,3.3x3.3x5.4	
.....6L905	2703-001245	INDUCTOR-SMD;8.2uH,10%,2x1.25x1.25mm	
.....6G101	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.....6G101	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.....6G101	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.....6G101	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.....6G101	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.....6G101	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.....6R949	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6R950	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6R951	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6R945	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6R946	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6R948	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6R966	2007-000931	R-CHIP;470ohm,5%,1/8W,TP,2012	
.....6PCB	AA41-00599B	PCB-MICOM;HCM4215W,FR-4,2L,B,1.6T,180X24	S.N.A
.....6	0202-001167	SOLDER-CREAM;RX3603-2330HO,S45A,PASTE,SN	S.N.A
.....5 IC902	1102-001130	IC-EPROM;M27W201-80F6,256KX8BIT,DIP,32P,	
.....5	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
....4 IC801	AA96-00475C	ASSY H/S;SILICON-OIL,KA278R09,KA7808,AA6	S.N.A
.....5	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
.....5 T0087	1203-000293	IC-POSI.FIXED REG.;7808,TO-220,3P,-,PLAS	
.....5 T0123	1203-002003	IC-VOLTAGE REGULATOR;278R09,TO-220,4P,-,	
.....5 T0081	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
.....5	AA62-00066B	HEAT SINK;D2,D3,AL ,T1.0,89,70,-,AA62-00	S.N.A
.....5 T0123	1203-001978	IC-VOLTAGE REGULATOR;KA278RA05,TO-220F,4	

Loc. No.	Code No.	Description ; Specification	Remark
....4 IC601	AA96-00623E	ASSY H/S;SCREW,MAIN,AA62-00056A,TDA7265,	S.N.A
.....5	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
.....5 T0124	1201-001026	IC-POWER AMP;7265,ZIP,11P,19.6MIL,DUAL,1	
.....5 T0081	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
.....5	AA62-00056A	HEAT SINK-PS;-,-,T1.0,-,41*35*70,D2,-,-	S.N.A
....4	BP39-00047A	LEAD CONNECTOR;P55A/HCM4215W,UL2547#26,U	
....4 T0095	BP95-00077A	ASSY SUB-PRO SCAN;HCM4215WJX/XAA,P55A,DV	
.....5	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
.....5 FC48	2305-000011	C-FILM,MPEF;470nF,5%,250V,TP,21.5X13.0X7	
.....5 EX01	2801-004019	CRYSTAL-UNIT;20.25MHz,30ppm,28-AAM,13pF,	
.....5 T0122	2802-001177	RESONATOR-CERAMIC;2.696MHZ,0.4%,BK,10X4.	
.....5 T0122	2802-001179	RESONATOR-CERAMIC;4MHZ,0.5%,BK,8X3X5.5MM	
.....5 CN02	3703-001124	CONNECTOR-BACK PANEL;32P,2R,MALE,ANGLE,A	
.....5 CN01	3703-001124	CONNECTOR-BACK PANEL;32P,2R,MALE,ANGLE,A	
.....5 CN906	3711-001164	CONNECTOR-HEADER;BOX,9P,1R,2.5mm,ANGLE,-	
.....5	BP97-00169A	ASSY SMD;HCM4215WJX/XAA,P55A	S.N.A
.....6FD13	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....6FD14	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....6FD15	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....6FD16	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....6FD17	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....6FD10	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....6FD01	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....6FD02	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....6FD07	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....6FD08	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....6FD09	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....6DZ016	0403-000746	DIODE-ZENER;RLZ3.9B,3.89-4.16V,500MW,LL-	
.....6DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
.....6DZ016	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
.....6DZ016	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
.....6DZ016	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
.....6DZ016	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
.....6SQ01	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.....6FQ13	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.....6FQ04	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.....6FQ03	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.....6FQ02	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.....6FQ08	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....6FQ09	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....6FQ12	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....6PQ01	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....6FQ06	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....6FQ05	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....6EQ15	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....6EQ14	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....6EQ13	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....6FQ07	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
.....6Q409	0505-000110	FET-SILICON;2N7002,N,60V,115MA,7.5OHM,0.	
.....6Q409	0505-000110	FET-SILICON;2N7002,N,60V,115MA,7.5OHM,0.	
.....6IC104	0801-000662	IC-CMOS LOGIC;74HC123,MULTIVIBATOR,SOP,1	
.....6IC106	1001-001082	IC-VIDEO SWITCH;BA7657F,-,SOP,24P,300MIL	
.....6IC06	1203-001211	IC-VOL. DETECTOR;7027,SOT-89,3P,-,PLASTI	
.....6T0087	1203-002186	IC-POSI.FIXED REG.;18,DPAK,3P,240MIL,PLA	
.....6T0087	1203-002302	IC-POSI.FIXED REG.;78RM33D,D-PAK,3P,-,PL	
.....6IC02	1204-001814	IC-SELECTOR;CXA2151Q,QFP,48P,144MIL,PLAS	
.....6IC01A	1204-001938	IC-DECODER;VSP9407B-B11,MQFP,80P,14X14MM	
.....6IC118	1204-001989	IC-VIDEO PROCESS;CXA2165Q,QFP,64P,20X14M	
.....6SR08	2007-000052	R-CHIP;10Kohm,1%,1/10W,TP,1608	
.....6FR80	2007-000052	R-CHIP;10Kohm,1%,1/10W,TP,1608	
.....6FR79	2007-000052	R-CHIP;10Kohm,1%,1/10W,TP,1608	
.....6FR78	2007-000052	R-CHIP;10Kohm,1%,1/10W,TP,1608	
.....6FR57	2007-000052	R-CHIP;10Kohm,1%,1/10W,TP,1608	
.....6FR35	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6FR07	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6ER90	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6FR76	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6FR96	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6SR09	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6SR22	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6ER29	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6ER04	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6ER05	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6ER06	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6ER13	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6ER19	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6ER18	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
.....6ER17	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6SR03	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6SR04	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6SR05	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6SR06	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6SR10	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6SR11	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6SR02	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6FR71	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6FR74	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6FR75	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6FR81	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6FR82	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6SR01	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6SR49	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6SR53	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6SR75	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6YR43	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6YR44	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6YR45	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6SR48	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6SR31	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6SR32	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6SR33	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6SR34	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6SR35	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6SR47	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6ER84	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6FR01	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6FR02	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6FR16	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6FR17	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6FR18	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6ER83	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6CR83	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6CR84	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6ER08	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6ER15	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6ER16	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6ER82	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6FR37	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6FR38	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6FR39	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6FR53	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6FR54	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6FR56	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6FR34	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6FR19	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6FR20	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6FR21	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6FR33	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6FR32	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6FR31	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6SR74	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
.....6SR21	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
.....6FR66	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
.....6ER28	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
.....6ER27	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
.....6ER26	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
.....6SR07	2007-000080	R-CHIP;2Kohm,5%,1/10W,TP,1608	
.....6FR40	2007-000080	R-CHIP;2Kohm,5%,1/10W,TP,1608	
.....6FR72	2007-000081	R-CHIP;2.7Kohm,5%,1/10W,TP,1608	
.....6FR73	2007-000082	R-CHIP;3.3Kohm,5%,1/10W,TP,1608	
.....6FR62	2007-000082	R-CHIP;3.3Kohm,5%,1/10W,TP,1608	
.....6FR45	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6FR44	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6ER92	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6ER91	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6FR42	2007-000086	R-CHIP;5.6Kohm,5%,1/10W,TP,1608	
.....6FR41	2007-000086	R-CHIP;5.6Kohm,5%,1/10W,TP,1608	
.....6PR01	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....6FR60	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....6FR22	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....6FR09	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....6FR58	2007-000092	R-CHIP;15Kohm,5%,1/10W,TP,1608	
.....6ER24	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	
.....6ER25	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
.....6FR77	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	
.....6PR02	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	
.....6ER20	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	
.....6ER21	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	
.....6ER22	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	
.....6ER23	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	
.....6FR63	2007-000118	R-CHIP;390ohm,5%,1/10W,TP,1608	
.....6FR70	2007-000124	R-CHIP;2.2Kohm,5%,1/10W,TP,1608	
.....6FR47	2007-000124	R-CHIP;2.2Kohm,5%,1/10W,TP,1608	
.....6FR46	2007-000124	R-CHIP;2.2Kohm,5%,1/10W,TP,1608	
.....6FR15	2007-000210	R-CHIP;1.1Kohm,5%,1/8W,TP,2012	
.....6FR14	2007-000210	R-CHIP;1.1Kohm,5%,1/8W,TP,2012	
.....6FR13	2007-000210	R-CHIP;1.1Kohm,5%,1/8W,TP,2012	
.....6FR10	2007-000210	R-CHIP;1.1Kohm,5%,1/8W,TP,2012	
.....6FR11	2007-000210	R-CHIP;1.1Kohm,5%,1/8W,TP,2012	
.....6FR12	2007-000210	R-CHIP;1.1Kohm,5%,1/8W,TP,2012	
.....6SR73	2007-000259	R-CHIP;1.6Kohm,5%,1/10W,TP,1608	
.....6SR26	2007-000309	R-CHIP;10ohm,5%,1/10W,TP,1608	
.....6SR25	2007-000309	R-CHIP;10ohm,5%,1/10W,TP,1608	
.....6SR23	2007-000309	R-CHIP;10ohm,5%,1/10W,TP,1608	
.....6FR36	2007-000691	R-CHIP;3.3Mohm,5%,1/16W,DA,TP,1608	
.....6FR43	2007-000869	R-CHIP;4.7Kohm,1%,1/10W,TP,1608	
.....6ER14	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6SR36	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6SR37	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6SR38	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6SR39	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6SR40	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6ER12	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6EC30	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6EC31	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6ER03	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6ER11	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6ER10	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6ER09	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,

Loc. No.	Code No.	Description ; Specification	Remark
.....6C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	

Loc. No.	Code No.	Description ; Specification	Remark
.....6D10	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....6D14	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....6D15	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....6D16	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....6D17	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....6D18	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....6D01	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....6D02	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....6D03	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....6D04	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....6D05	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....6D09	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....6D08	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....6D07	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....6D06	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....6DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
.....6DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
.....6DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
.....6Q02	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.....6Q03	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.....6Q10	0501-000342	TR-SMALL SIGNAL;KSC1623-Y,NPN,200mW,SOT-	
.....6Q04	0501-000342	TR-SMALL SIGNAL;KSC1623-Y,NPN,200mW,SOT-	
.....6Q409	0505-000110	FET-SILICON;2N7002,N,60V,115MA,7.5OHM,0.	
.....6Q409	0505-000110	FET-SILICON;2N7002,N,60V,115MA,7.5OHM,0.	
.....6Q409	0505-000110	FET-SILICON;2N7002,N,60V,115MA,7.5OHM,0.	
.....6IC104	0801-002345	IC-CMOS LOGIC;7S04,INVERTER,SOT-353,5P,4	
.....6IC104	0801-002345	IC-CMOS LOGIC;7S04,INVERTER,SOT-353,5P,4	
.....6IC104	0801-002345	IC-CMOS LOGIC;7S04,INVERTER,SOT-353,5P,4	
.....6IC08	1001-000164	IC-ANALOG MULTIPLEX;74HC4052,CMOS,SOP,16	
.....6IC13	1001-001155	IC-ANALOG MULTIPLEX;NC7SB3157P6X,CMOS,SC	
.....6IC112	1103-001195	IC-EEPROM;24C64,8Kx8Bit,SOP,8P,150MIL,10	
.....6DU410	1201-001135	IC-OP AMP;324,SOP,ST,14P,150MIL,QUAD,100	
.....6DU410	1201-001504	IC-OP AMP;072,SOP,8P,150MIL,DUAL,-,PLAST	
.....6DU410	1201-001504	IC-OP AMP;072,SOP,8P,150MIL,DUAL,-,PLAST	
.....6DU410	1201-001504	IC-OP AMP;072,SOP,8P,150MIL,DUAL,-,PLAST	
.....6DU410	1201-001504	IC-OP AMP;072,SOP,8P,150MIL,DUAL,-,PLAST	
.....6T0074	1201-001520	IC-VIDEO AMP;EL2250CS,SOIC,8P,150MIL,DUA	
.....6IC03	1203-001824	IC-VOL. DETECTOR;7042,SOT-89,3P,-,PLASTI	
.....6T0087	1203-002302	IC-POSI.FIXED REG.;78RM33D,D-PAK,3P,-,PL	
.....6IC17	1209-001163	IC-PLL;TLC2932IPWLE,SOP,14P,-,PLASTIC	
.....6R36	2007-000028	R-CHIP;39ohm,5%,1/8W,TP,2012	
.....6R35	2007-000028	R-CHIP;39ohm,5%,1/8W,TP,2012	
.....6R31	2007-000028	R-CHIP;39ohm,5%,1/8W,TP,2012	
.....6R30	2007-000028	R-CHIP;39ohm,5%,1/8W,TP,2012	
.....6R143	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6R144	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6R25	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6R122	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6R123	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6R141	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6R136	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....6R15	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....6R24	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....6R45	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....6R46	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....6R09	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....6R10	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....6R129	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....6R134	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....6R135	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....6R59	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6R65	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6R71	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6R77	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6R91	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6R53	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6R02	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6R16	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6R17	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6R20	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6R47	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6R62	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6R64	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6R68	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6R58	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6R56	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6R52	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
.....6R70	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6R98	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6R94	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6R82	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6R80	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6R76	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6R74	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6R38	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6R37	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6R110	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6R11	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6R101	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6R03	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6R39	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6R50	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6R44	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6R43	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6R42	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6R41	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6R40	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6R128	2007-000079	R-CHIP;1.8Kohm,5%,1/10W,TP,1608	
.....6R81	2007-000080	R-CHIP;2Kohm,5%,1/10W,TP,1608	
.....6R75	2007-000080	R-CHIP;2Kohm,5%,1/10W,TP,1608	
.....6R69	2007-000080	R-CHIP;2Kohm,5%,1/10W,TP,1608	
.....6R51	2007-000080	R-CHIP;2Kohm,5%,1/10W,TP,1608	
.....6R57	2007-000080	R-CHIP;2Kohm,5%,1/10W,TP,1608	
.....6R63	2007-000080	R-CHIP;2Kohm,5%,1/10W,TP,1608	
.....6R109	2007-000082	R-CHIP;3.3Kohm,5%,1/10W,TP,1608	
.....6R66	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6R61	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6R60	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6R55	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6R54	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6R79	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6R78	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6R73	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6R72	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6R67	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6R49	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6R08	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6R07	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6R06	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6R04	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6R01	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6R48	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6R133	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6R121	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6R119	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6R118	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6R86	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....6R92	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....6R93	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....6R96	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....6R97	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....6R85	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....6R113	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....6R114	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....6R115	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....6R83	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....6R84	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....6R125	2007-000091	R-CHIP;12Kohm,5%,1/10W,TP,1608	
.....6R05	2007-000102	R-CHIP;100Kohm,5%,1/10W,TP,1608	
.....6R127	2007-000109	R-CHIP;1Mohm,5%,1/10W,TP,1608	
.....6R100	2007-000118	R-CHIP;390ohm,5%,1/10W,TP,1608	
.....6R32	2007-000119	R-CHIP;560ohm,5%,1/10W,TP,1608	
.....6R34	2007-000122	R-CHIP;1.2Kohm,5%,1/10W,TP,1608	
.....6R29	2007-000122	R-CHIP;1.2Kohm,5%,1/10W,TP,1608	
.....6R28	2007-000122	R-CHIP;1.2Kohm,5%,1/10W,TP,1608	
.....6R117	2007-000122	R-CHIP;1.2Kohm,5%,1/10W,TP,1608	
.....6R107	2007-000122	R-CHIP;1.2Kohm,5%,1/10W,TP,1608	
.....6R33	2007-000124	R-CHIP;2.2Kohm,5%,1/10W,TP,1608	
.....6R120	2007-000124	R-CHIP;2.2Kohm,5%,1/10W,TP,1608	
.....6R90	2007-000133	R-CHIP;330Kohm,5%,1/10W,TP,1608	
.....6R89	2007-000133	R-CHIP;330Kohm,5%,1/10W,TP,1608	
.....6R88	2007-000133	R-CHIP;330Kohm,5%,1/10W,TP,1608	
.....6R87	2007-000133	R-CHIP;330Kohm,5%,1/10W,TP,1608	
.....6R108	2007-000381	R-CHIP;13Kohm,5%,1/10W,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
.....6R139	2007-000402	R-CHIP;150ohm,5%,1/10W,TP,1608	
.....6R138	2007-000402	R-CHIP;150ohm,5%,1/10W,TP,1608	
.....6R137	2007-000402	R-CHIP;150ohm,5%,1/10W,TP,1608	
.....6R99	2007-000704	R-CHIP;3.6Kohm,5%,1/16W,DA,TP,1608	
.....6R95	2007-000704	R-CHIP;3.6Kohm,5%,1/16W,DA,TP,1608	
.....6R126	2007-000857	R-CHIP;4.3Kohm,1%,1/16W,DA,TP,1608	
.....6R27	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6R26	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6R116	2007-001179	R-CHIP;8.2Kohm,5%,1/10W,TP,1608	
.....6RN04	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....6RN05	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....6RN06	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....6RN01	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....6RN02	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....6RN03	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....6C120	2203-000041	C-CERAMIC,CHIP;0.01NF,0.25PF,50V,C0G,TP,

Loc. No.	Code No.	Description ; Specification	Remark
.....5 R125	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-001000	R-CARBON;82KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R811	2001-001071	R-CARBON(S);12KOHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R801	2001-001077	R-CARBON(S);150OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R677	2001-001103	R-CARBON(S);20KOHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R674	2001-001103	R-CARBON(S);20KOHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R681	2001-001146	R-CARBON(S);4.7OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R682	2001-001146	R-CARBON(S);4.7OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R814	2003-001098	R-METAL OXIDE(S);22Kohm,5%,3W,AA,TP,6x16	
.....5 R805	2004-000970	R-METAL;470ohm,1%,1/4W,AA,TP,2.4x6.4mm	
.....5 R024	2004-001390	R-METAL(S);1Kohm,2%,1/2W,AA,TP,2.4x6.4mm	
.....5 R024	2004-001390	R-METAL(S);1Kohm,2%,1/2W,AA,TP,2.4x6.4mm	
.....5 R024	2004-001970	R-METAL(S);1.8Kohm,1%,1/2W,AA,TP,6.5x2.5	
.....5 R024	2004-001970	R-METAL(S);1.8Kohm,1%,1/2W,AA,TP,6.5x2.5	
.....5 R024	2004-001970	R-METAL(S);1.8Kohm,1%,1/2W,AA,TP,6.5x2.5	
.....5 R024	2004-001970	R-METAL(S);1.8Kohm,1%,1/2W,AA,TP,6.5x2.5	
.....5 C695	2301-000192	C-FILM,PEF;1nF,5%,50V,TP,5.3x10mm,5mm	
.....5 C694	2301-000192	C-FILM,PEF;1nF,5%,50V,TP,5.3x10mm,5mm	
.....5 C689	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
.....5 C687	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
.....5 C682	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
.....5 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000039	C-AL;1000uF,20%,16V,GP,TP,10x16,5	
.....5 C701	2401-000039	C-AL;1000uF,20%,16V,GP,TP,10x16,5	
.....5 C701	2401-000192	C-AL;1000uF,20%,50V,GP,TP,16x25,7.5	
.....5 C701	2401-000192	C-AL;1000uF,20%,50V,GP,TP,16x25,7.5	
.....5 C701	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
.....5 C701	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
.....5 C701	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
.....5 C701	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
.....5 C701	2401-000471	C-AL;10uF,20%,50V,BP,TP,5x11,5mm	
.....5 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000603	C-AL;1UF,20%,50V,GP,TP,5X11,2	
.....5 C701	2401-000603	C-AL;1UF,20%,50V,GP,TP,5X11,2	
.....5 C701	2401-000603	C-AL;1UF,20%,50V,GP,TP,5X11,2	
.....5 C701	2401-000603	C-AL;1UF,20%,50V,GP,TP,5X11,2	
.....5 C701	2401-000603	C-AL;1UF,20%,50V,GP,TP,5X11,2	
.....5 C701	2401-000832	C-AL;220uF,20%,25V,GP,TP,8x11.5,5	
.....5 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-001192	C-AL;33uF,20%,50V,GP,TP,6.3x11,5	
.....5 C701	2401-001397	C-AL;470uF,20%,25V,GP,TP,10x16,5	
.....5 C701	2401-001513	C-AL;47uF,20%,16V,WT,TP,5x11,5	
.....5 C701	2401-000025	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
.....5 C701	2401-000025	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
.....5 C701	2401-000025	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
.....5 C701	2401-000025	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
.....5 C701	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
.....5 C701	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
.....5 C701	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
.....5 C701	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
.....5 C701	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
.....5 C701	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
.....5 C701	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
.....5 C701	2401-002300	C-AL;47uF,20%,50V,GP,TP,6.3x11,5	
.....5 C701	2401-002300	C-AL;47uF,20%,50V,GP,TP,6.3x11,5	
.....5 C701	2401-002459	C-AL;220uF,20%,25V,LZ,TP,10x16,5	
.....5 C701	2401-002459	C-AL;220uF,20%,25V,LZ,TP,10x16,5	
.....5 C701	2401-002459	C-AL;220uF,20%,25V,LZ,TP,10x16,5	
.....5 C701	2401-002459	C-AL;220uF,20%,25V,LZ,TP,10x16,5	
.....5 C701	2401-002459	C-AL;220uF,20%,25V,LZ,TP,10x16,5	
.....5 C701	2401-002459	C-AL;220uF,20%,25V,LZ,TP,10x16,5	
.....5 C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
.....5 C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
.....5 C701	2401-002594	C-AL;220uF,20%,16V,GP,TP,8x11.5,5	
.....5 C701	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
.....5 C701	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
.....5 C701	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
.....5 C701	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
.....5 C701	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
.....5 L105	2701-000106	INDUCTOR-AXIAL;1.5uH,10%,3x7mm	
.....5 L119	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
.....5 L120	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
.....5 L121	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
.....5 L122	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
.....5 L123	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
.....5 L124	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
.....5 L107	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
.....5 L108	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
.....5 L111	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
.....5 L114	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
.....5 L113	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
.....5 L112	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
.....5 L703	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
.....5 L106	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
.....5 L104	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
.....5 L103	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
.....5 L101	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
.....5 L706	2701-001030	INDUCTOR-AXIAL;43uH,10%,5x14mm	
.....5 L705	2701-001030	INDUCTOR-AXIAL;43uH,10%,5x14mm	
.....5 L102	2701-001040	INDUCTOR-AXIAL;10uH,10%,4.5x14mm	
.....5 G101	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
.....5 G101	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
.....5 G101	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
.....5 CN906	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
.....5 CN906	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
.....5 CN906	3711-002643	CONNECTOR-HEADER;BOX,4P,1R,2.5mm,STRAIGH	
.....5 CN906	3711-002645	CONNECTOR-HEADER;BOX,6P,1R,2.5mm,STRAIGH	
.....5 GT03	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT02	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT01	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5	AA97-07233J	ASSY SMD;HCM4215WX/XAA,P55A	S.N.A
.....6DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
.....6DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
.....6DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
.....6DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
.....6DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
.....6DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
.....6DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
.....6DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
.....6DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
.....6DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
.....6DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
.....6DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
.....6DZ016	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
.....6DZ016	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
.....6DZ016	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
.....6Q703	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	

Loc. No.	Code No.	Description ; Specification	Remark
.....6Q704	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....6Q707	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....6Q708	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....6Q709	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....6Q710	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....6Q101	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....6Q103	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....6Q106	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....6IC106	1001-001177	IC-VIDEO SWITCH;TEA6425D,VIDEO SWITCH ,S	
.....6IC106	1001-001177	IC-VIDEO SWITCH;TEA6425D,VIDEO SWITCH ,S	
.....6IC605	1001-001178	IC-AUDIO SWITCH;TEA6422D,AUDIO SWITCH ,S	
.....6IC704	1002-001048	IC-A/D&D/A CONVERTER;PCF8591T,8BIT,SOP,1	
.....6DU410	1201-000541	IC-OP AMP;062,SOP,8P,153MIL,DUAL,6V/mV,P	
.....6R777	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6R776	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6R775	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6R904	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6R101	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6R117	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6R143	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6R148	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6R145	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6R712	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6R789	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6R795	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6R706	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6R708	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6R788	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6R791	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6R794	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6R79B	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6R729	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6R97C	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6R626	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6R627	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6R646	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6R602	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6R601	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6R172	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6R647	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6R757	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6R756	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6R724	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6R722	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6R709	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6R707	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6R703	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6R116	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6R115	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6R114	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6R113	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6R108	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6R107	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6R103	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6R102	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6R171	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6R170	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6R127	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6R125	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6R126	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6R624	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6R625	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6R730	2007-000076	R-CHIP;330ohm,5%,1/10W,TP,1608	
.....6R166	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
.....6R150	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
.....6R157	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
.....6R653	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6R652	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6R651	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6R632	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6R631	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6R630	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6R629	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6R628	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6R603	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6R106	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6R633	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
.....6R643	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6R642	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6R641	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6R637	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6R634	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6R635	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6R636	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6R728	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6R793	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6R797	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6R798	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6R780	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6R755	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6R750	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6R604	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6R611	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6R688	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6R749	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....6R748	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....6R747	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....6R746	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....6R744	2007-000093	R-CHIP;20Kohm,5%,1/10W,TP,1608	
.....6R743	2007-000093	R-CHIP;20Kohm,5%,1/10W,TP,1608	
.....6R741	2007-000093	R-CHIP;20Kohm,5%,1/10W,TP,1608	
.....6R739	2007-000093	R-CHIP;20Kohm,5%,1/10W,TP,1608	
.....6R164	2007-000094	R-CHIP;22Kohm,5%,1/10W,TP,1608	
.....6R165	2007-000094	R-CHIP;22Kohm,5%,1/10W,TP,1608	
.....6R149	2007-000094	R-CHIP;22Kohm,5%,1/10W,TP,1608	
.....6R151	2007-000094	R-CHIP;22Kohm,5%,1/10W,TP,1608	
.....6R155	2007-000094	R-CHIP;22Kohm,5%,1/10W,TP,1608	
.....6R156	2007-000094	R-CHIP;22Kohm,5%,1/10W,TP,1608	
.....6R716	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	
.....6R704	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	
.....6R110	2007-000098	R-CHIP;56Kohm,5%,1/10W,TP,1608	
.....6R105	2007-000098	R-CHIP;56Kohm,5%,1/10W,TP,1608	
.....6R745	2007-000127	R-CHIP;9.1Kohm,5%,1/10W,TP,1608	
.....6R742	2007-000127	R-CHIP;9.1Kohm,5%,1/10W,TP,1608	
.....6R740	2007-000127	R-CHIP;9.1Kohm,5%,1/10W,TP,1608	
.....6R738	2007-000127	R-CHIP;9.1Kohm,5%,1/10W,TP,1608	
.....6R612	2007-000134	R-CHIP;33Kohm,5%,1/10W,TP,1608	
.....6R607	2007-000134	R-CHIP;33Kohm,5%,1/10W,TP,1608	
.....6R609	2007-000329	R-CHIP;11Kohm,5%,1/10W,TP,1608	
.....6R608	2007-000329	R-CHIP;11Kohm,5%,1/10W,TP,1608	
.....6R109	2007-000828	R-CHIP;39Kohm,1%,1/16W,DA,TP,1608	
.....6R104	2007-000828	R-CHIP;39Kohm,1%,1/16W,DA,TP,1608	
.....6R754	2007-001010	R-CHIP;51Kohm,5%,1/10W,TP,1608	
.....6R753	2007-001010	R-CHIP;51Kohm,5%,1/10W,TP,1608	
.....6R752	2007-001010	R-CHIP;51Kohm,5%,1/10W,TP,1608	
.....6R751	2007-001010	R-CHIP;51Kohm,5%,1/10W,TP,1608	
.....6R610	2007-001010	R-CHIP;51Kohm,5%,1/10W,TP,1608	
.....6R605	2007-001010	R-CHIP;51Kohm,5%,1/10W,TP,1608	
.....6R714	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6R713	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6R710	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6R701	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6R174	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6R799	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6R731	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6R727	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6R726	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6R725	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6R134	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6R133	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6R132	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6R121	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6R120	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6R119	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6R118	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6R173	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6R142	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6R140	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6R137	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6R138	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6R702	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6R792	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6R613	2007-001179	R-CHIP;8.2Kohm,5%,1/10W,TP,1608	
.....6R606	2007-001179	R-CHIP;8.2Kohm,5%,1/10W,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
.....6C120	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
.....6C120	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
.....6C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G

Loc. No.	Code No.	Description ; Specification	Remark
....4 RFZ52	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
....4 RFZ53	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
....4 RFZ19	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
....4 RFZ20	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
....4 RFZ21	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
....4 RFZ22	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
....4 C598	2201-000327	C-CERAMIC,DISC;2.2NF,10%,50V,Y5V,TP,6.5X	
....4 C598	2201-000327	C-CERAMIC,DISC;2.2NF,10%,50V,Y5V,TP,6.5X	
....4 C598	2201-000327	C-CERAMIC,DISC;2.2NF,10%,50V,Y5V,TP,6.5X	
....4 C598	2201-000327	C-CERAMIC,DISC;2.2NF,10%,50V,Y5V,TP,6.5X	
....4 C689	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
....4 C689	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
....4 C689	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
....4 C689	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
....4 C689	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
....4 C689	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
....4 C689	2202-000205	C-CERAMIC,MLC-AXIAL;22pF,5%,50V,SL,TP,1.	
....4 C689	2202-000205	C-CERAMIC,MLC-AXIAL;22pF,5%,50V,SL,TP,1.	
....4 C689	2202-000205	C-CERAMIC,MLC-AXIAL;22pF,5%,50V,SL,TP,1.	
....4 C689	2202-000205	C-CERAMIC,MLC-AXIAL;22pF,5%,50V,SL,TP,1.	
....4 C689	2202-000205	C-CERAMIC,MLC-AXIAL;22pF,5%,50V,SL,TP,1.	
....4 CZ113	2202-000561	C-CERAMIC,MLC-RADIAL;0.68NF,5%,50V,C0G,T	
....4 CZ114	2202-000561	C-CERAMIC,MLC-RADIAL;0.68NF,5%,50V,C0G,T	
....4 C701	2401-000183	C-AL;1000uF,20%,35V,WT,TP,12.5x25,5	
....4 C701	2401-000183	C-AL;1000uF,20%,35V,WT,TP,12.5x25,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 LZ112	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
....4 LZ111	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
....4 LZ110	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
....4 LZ109	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
....4 LZ108	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
....4 LZ107	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
....4 FD102S	3601-001065	FUSE-AXIAL LEAD;125V,3.5A,FAST-ACTING,CE	
....4 FD101S	3601-001065	FUSE-AXIAL LEAD;125V,3.5A,FAST-ACTING,CE	
....4 ELZ01	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 ELZ02	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 ELZ03	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 C689	2202-000825	C-CERAMIC,MLC-AXIAL;680pF,10%,50V,Y5P,TP	
....4 C689	2202-000825	C-CERAMIC,MLC-AXIAL;680pF,10%,50V,Y5P,TP	
....4 C689	2202-000825	C-CERAMIC,MLC-AXIAL;680pF,10%,50V,Y5P,TP	
....4 C689	2202-000825	C-CERAMIC,MLC-AXIAL;680pF,10%,50V,Y5P,TP	
....4 C689	2202-000825	C-CERAMIC,MLC-AXIAL;680pF,10%,50V,Y5P,TP	
....4 C689	2202-000863	C-CERAMIC,MLC-AXIAL;560pF,10%,50V,Y5P,TP	
....4 C689	2202-000863	C-CERAMIC,MLC-AXIAL;560pF,10%,50V,Y5P,TP	
....4 C689	2202-000863	C-CERAMIC,MLC-AXIAL;560pF,10%,50V,Y5P,TP	
....4 C689	2202-000863	C-CERAMIC,MLC-AXIAL;560pF,10%,50V,Y5P,TP	
....4 C689	2202-000863	C-CERAMIC,MLC-AXIAL;560pF,10%,50V,Y5P,TP	
....4 C689	2202-000863	C-CERAMIC,MLC-AXIAL;560pF,10%,50V,Y5P,TP	
....4 R125	2001-000800	R-CARBON;5.1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 0	AA41-00601C	PCB;HCM4215W,PCB,CEM-1,1L,C,1.6,245X245,	S.N.A
....4 SGZ101	4715-000106	SURGE ABSORBER;300V,210-390V,-,-,AXIAL	S.N.A
...3 T0076	BP39-00005A	LEAD CONNECTOR-ASSY;P55A/HCM4215W,UL2547	
...3 T0076	BP39-00015A	LEAD CONNECTOR-ASSY;P55A/HCM4215W,UL1185	
...3	BP61-00076A	HOLDER-PUSH,A;42W5,NYLON6.6,NATURAL	S.N.A
...3	BP61-00077A	HOLDER-PUSH,B;42W5,NYLON6.6,NATURAL	S.N.A
...3 CZ101	BP96-00005A	ASSY HEAT SINK P;BP62-00002A,SCREW,STK39	S.N.A
....4 T0081	6003-001021	SCREW-TAPTITE;RH,+,B,M3,L15,ZPC(YEL),SWR	S.N.A
....4 CIS	BP62-00002A	HEAT SINK;COMMANDO,A1050P,T2.0,W62.0,H14	S.N.A
....4 CIS	BP62-00008A	HEAT SINK;COMMANDO CG AMP,AL6063,T2.0,W1	S.N.A
....4 CIS	BP73-00002A	SILICON/RUBBER;COMMANDO CG AMP,SILICON ,	S.N.A
....4 T0074	1201-001225	IC-VIDEO AMP;392,SIP,22P,-,TRIPLE,-,PLAS	
..2 T0099	BP94-00234A	ASSY PCB MISC-CRT;DP,HCM4215W3S/XAA,P55A	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3 VR561	2101-000321	VR-ROTARY;1Mohm,-,0.6W,SIDE	
...3 VR531	2101-000321	VR-ROTARY;1Mohm,-,0.6W,SIDE	
...3 VR501	2101-000321	VR-ROTARY;1Mohm,-,0.6W,SIDE	
...3 T0121	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
...3 V561	3704-001019	SOCKET-CRT;10P,29.1PI,35.5PI,AU30U,-	
...3 V531	3704-001019	SOCKET-CRT;10P,29.1PI,35.5PI,AU30U,-	
...3 V501	3704-001019	SOCKET-CRT;10P,29.1PI,35.5PI,AU30U,-	
...3 CN906	3711-002645	CONNECTOR-HEADER;BOX,6P,1R,2.5mm,STRAIGH	
...3 CN906	3711-002648	CONNECTOR-HEADER;BOX,9P,1R,2.5mm,STRAIGH	
...3 CN906	3711-003052	CONNECTOR-HEADER;BOX,10P,1R,2.5MM,STRAIG	
...3 CN906	3711-003052	CONNECTOR-HEADER;BOX,10P,1R,2.5MM,STRAIG	
...3 CN906	3711-003973	CONNECTOR-HEADER;BOX,11P,1R,2.5mm,STRAIG	
...3 CN906	3711-003973	CONNECTOR-HEADER;BOX,11P,1R,2.5mm,STRAIG	

Loc. No.	Code No.	Description ; Specification	Remark
...3 SG301	4715-001050	SURGE ABSORBER;2.4kV,20%,1500A,-,DISC-RA	
...3 SG562	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm MIN,	
...3 SG532	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm MIN,	
...3 SG502	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm MIN,	
...3 T0076	AA39-00112A	LEAD CONNECTOR-ASSY;,UL1007#26,UL/CSA,10	
...3 T0076	AA39-00120F	LEAD CONNECTOR-ASSY;SIR-T165,UL1007#26,U	
...3 T0076	AA39-00198D	LEAD CONNECTOR-ASSY;P55A/HCM4215W,UL1617	
...3 T0076	AA39-20010B	LEAD CONNECTOR-ASSY;,1P,500,YFH800-01,S,	
...3 T0076	AA39-20010D	LEAD CONNECTOR-ASSY;,1P,400,YFH800-01,S,	
...3 T0076	AA39-20010D	LEAD CONNECTOR-ASSY;,1P,400,YFH800-01,S,	
...3 T0076	AA39-20027B	LEAD CONNECTOR-ASSY;,6P,400,67096-006,S,	
...3 T0076	AA39-20031D	LEAD CONNECTOR-ASSY;,9P,500,67096-009,S,	
...3	AA69-01396A	BAG PE;SKD CHASSIS,LDPE,T0.03,240,180,NO	S.N.A
...3 Q371	AA96-00244H	ASSY H/S;SCREW,2SC4636(2),CRT,SLICON-OIL	S.N.A
....4	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4 T0090	0502-000442	TR-POWER;2SC4636RB,NPN,2W,TO-220,ST,10-	
....4 T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
....4	AA62-00046A	HEAT SINK-PS;-,-,T1.0,-,D1(DREAM) 60X25X	S.N.A
...3 IC561	AA96-50311L	ASSY H/S;-,AMP,AA62-30175D ,TDA6111Q,HE	S.N.A
...3 IC531	AA96-50311L	ASSY H/S;-,AMP,AA62-30175D ,TDA6111Q,HE	S.N.A
...3 IC501	AA96-50311L	ASSY H/S;-,AMP,AA62-30175D ,TDA6111Q,HE	S.N.A
....4 T0074	1201-001131	IC-VIDEO AMP;6111,SIP,9P,-,SINGLE,-,PLAS	
....4 T0081	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
....4	AA62-30175D	HEAT SINK-PS;-,SECC,T1.0,-,33X15X30 FT-2	S.N.A
...3	AA97-07608A	ASSY AUTO-CRT;HCM4215W	S.N.A
....4 D372	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D504	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D509	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D361	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D362	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D371	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 D510	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 T0083	0402-000493	DIODE-RECTIFIER;1R5GU41,400V,1.5A,DO-15L	
....4 T0083	0402-000493	DIODE-RECTIFIER;1R5GU41,400V,1.5A,DO-15L	
....4 T0083	0402-000493	DIODE-RECTIFIER;1R5GU41,400V,1.5A,DO-15L	
....4 T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 DZ016	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
....4 DZ016	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
....4 DZ016	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
....4 DZ016	0403-000708	DIODE-ZENER;MTZJ13B,13V,12.55-13.21V,500	
....4 DZ016	0403-000708	DIODE-ZENER;MTZJ13B,13V,12.55-13.21V,500	
....4 DZ016	0403-000708	DIODE-ZENER;MTZJ13B,13V,12.55-13.21V,500	
....4 DZ016	0403-000708	DIODE-ZENER;MTZJ13B,13V,12.55-13.21V,500	
....4 Q563	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4 Q534	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4 Q533	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4 Q504	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4 Q361	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4 Q362	0501-000366	TR-SMALL SIGNAL;KSC2330-Y,NPN,1W,TO-92L,	
....4 Q502	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 T0090	0502-000006	TR-POWER;KSC1507,NPN,15W,TO-220,TP,120-	
....4 T0090	0502-000006	TR-POWER;KSC1507,NPN,15W,TO-220,TP,120-	
....4 T0090	0502-000006	TR-POWER;KSC1507,NPN,15W,TO-220,TP,120-	
....4 R125	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R584	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R554	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R524	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R580	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R550	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R520	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R577	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R547	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R517	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R366	2001-000109	R-CARBON(S);470OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	

Loc. No.	Code No.	Description ; Specification	Remark
....4 R125	2001-000539	R-CARBON;24KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000660	R-CARBON;33KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000723	R-CARBON;4.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000938	R-CARBON;68OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-001015	R-CARBON;9.1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R581	2001-001052	R-CARBON(S);1.5MOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R551	2001-001052	R-CARBON(S);1.5MOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R521	2001-001052	R-CARBON(S);1.5MOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R371	2001-001065	R-CARBON(S);110KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R370	2001-001065	R-CARBON(S);110KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R369A	2001-001065	R-CARBON(S);110KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R367	2001-001065	R-CARBON(S);110KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R368	2001-001065	R-CARBON(S);110KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R369	2001-001065	R-CARBON(S);110KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R567	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R537	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R507	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R381	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R361	2001-001097	R-CARBON(S);2.4KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R374	2001-001110	R-CARBON(S);240KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R373	2001-001110	R-CARBON(S);240KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R372	2001-001110	R-CARBON(S);240KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R377	2001-001110	R-CARBON(S);240KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R375	2001-001113	R-CARBON(S);270KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R365	2001-001120	R-CARBON(S);3.3OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R574	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R544	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R514	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R583	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
....4 R582	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
....4 R553	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
....4 R552	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
....4 R523	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
....4 R522	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
....4 R589	2002-001015	R-COMPOSITION;47Kohm,5%,1/2W,AA,TP,3.7x9	
....4 R559	2002-001015	R-COMPOSITION;47Kohm,5%,1/2W,AA,TP,3.7x9	
....4 R529	2002-001015	R-COMPOSITION;47Kohm,5%,1/2W,AA,TP,3.7x9	
....4 R575	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
....4 R545	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
....4 R515	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
....4 R579	2002-001021	R-COMPOSITION;560KOHM,5%,1/2W,AA,TP,3.7X	
....4 R578	2002-001021	R-COMPOSITION;560KOHM,5%,1/2W,AA,TP,3.7X	
....4 R549	2002-001021	R-COMPOSITION;560KOHM,5%,1/2W,AA,TP,3.7X	
....4 R518	2002-001021	R-COMPOSITION;560KOHM,5%,1/2W,AA,TP,3.7X	
....4 R519	2002-001021	R-COMPOSITION;560KOHM,5%,1/2W,AA,TP,3.7X	
....4 R548	2002-001021	R-COMPOSITION;560KOHM,5%,1/2W,AA,TP,3.7X	
....4 R588	2003-000738	R-METAL OXIDE(S);56Kohm,5%,2W,AA,TP,4x12	
....4 R538	2003-000738	R-METAL OXIDE(S);56Kohm,5%,2W,AA,TP,4x12	
....4 R508	2003-000738	R-METAL OXIDE(S);56Kohm,5%,2W,AA,TP,4x12	
....4 R024	2004-001892	R-METAL(S);162Kohm,1%,1/2W,AA,TP,2.5x6.5	
....4 R024	2004-001892	R-METAL(S);162Kohm,1%,1/2W,AA,TP,2.5x6.5	
....4 R024	2004-001892	R-METAL(S);162Kohm,1%,1/2W,AA,TP,2.5x6.5	
....4 R573	2008-001129	R-FUSIBLE(S);1.5ohm,5%,1/2W,AF,TP,2.5x6.	
....4 R543	2008-001129	R-FUSIBLE(S);1.5ohm,5%,1/2W,AF,TP,2.5x6.	
....4 R513	2008-001129	R-FUSIBLE(S);1.5ohm,5%,1/2W,AF,TP,2.5x6.	
....4 C598	2201-000119	C-CERAMIC,DISC;100NF,+80-20%,50V,Y5V,TP,	
....4 C598	2201-000119	C-CERAMIC,DISC;100NF,+80-20%,50V,Y5V,TP,	
....4 C598	2201-000119	C-CERAMIC,DISC;100NF,+80-20%,50V,Y5V,TP,	
....4 C598	2201-000556	C-CERAMIC,DISC;0.47NF,10%,500V,Y5P,TP,5.	
....4 C598	2201-000723	C-CERAMIC,DISC;4.7NF,20%,3KV,Y5U,TP,16X5	
....4 C598	2201-000723	C-CERAMIC,DISC;4.7NF,20%,3KV,Y5U,TP,16X5	
....4 C598	2201-000723	C-CERAMIC,DISC;4.7NF,20%,3KV,Y5U,TP,16X5	
....4 C598	2201-000983	C-CERAMIC,DISC;1NF,10%,2KV,Y5P,TP,9X5MM,	
....4 C598	2201-000983	C-CERAMIC,DISC;1NF,10%,2KV,Y5P,TP,9X5MM,	
....4 C598	2201-000983	C-CERAMIC,DISC;1NF,10%,2KV,Y5P,TP,9X5MM,	
....4 C565	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
....4 C535	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
....4 C505	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
....4 C507	2305-000154	C-FILM,MPEF;100nF,5%,400V,TP,21.5x6.5x11	
....4 C537	2305-000154	C-FILM,MPEF;100nF,5%,400V,TP,21.5x6.5x11	
....4 C567	2305-000154	C-FILM,MPEF;100nF,5%,400V,TP,21.5x6.5x11	
....4 C361	2306-000122	C-FILM,MPPF;100nF,5%,50V,TP,7.3x4.0x5.0m	
....4 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000133	C-AL;1000uF,20%,16V,GP,TP,10x20,5	
....4 C701	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
....4 C701	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
....4 C701	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
....4 C701	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
....4 C701	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
....4 C701	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
....4 C701	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
....4 C701	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
....4 C701	2401-001621	C-AL;6.8uF,20%,450V,GP,TP,13x20,5	
....4 L531	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
....4 L501	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
....4 SG561	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
....4 SG563	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
....4 SG533	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
....4 SG501	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
....4 SG503	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
....4 SG531	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
....4 EL06	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EL03	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EL563	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL537	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL536	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL535	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL564	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL565	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL566	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL567	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL534	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL01	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL02	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL04	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL05	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL533	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL505	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL504	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL503	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 GT537	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT561	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT536	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT535	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT534	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT562	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT568	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT567	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT564	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT563	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT503	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT502	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT501	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT373	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT372	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT371	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT504	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT533	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT532	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT531	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT506	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT374	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT375	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 R125	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 DZ016	0403-000334	DIODE-ZENER;UZ2.7BSA,2.7V,2.54-2.75V,500	
....4 DZ016	0403-000334	DIODE-ZENER;UZ2.7BSA,2.7V,2.54-2.75V,500	
....4 DZ016	0403-000334	DIODE-ZENER;UZ2.7BSA,2.7V,2.54-2.75V,500	
....4 R566	2001-001049	R-CARBON(S);1.3KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R536	2001-001049	R-CARBON(S);1.3KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R506	2001-001049	R-CARBON(S);1.3KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R125	2001-000007	R-CARBON;3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	

Loc. No.	Code No.	Description ; Specification	Remark
....4 R125	2001-000006	R-CARBON;2.4KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 C598	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.	
....4 C598	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.	
....4 C598	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.	
....4 C701	2401-001571	C-AL;47uF,+20%-0%,50V,GP,TP,8x11.5,	
....4 C701	2401-001571	C-AL;47uF,+20%-0%,50V,GP,TP,8x11.5,	
....4 C701	2401-001571	C-AL;47uF,+20%-0%,50V,GP,TP,8x11.5,	
....4 R125	2001-000319	R-CARBON;120KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000232	R-CARBON;1.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000908	R-CARBON;62KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000908	R-CARBON;62KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000908	R-CARBON;62KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 L561	2701-000168	INDUCTOR-AXIAL;3.3uH,5%,2.5x3.4mm	
....4 R382	2002-001014	R-COMPOSITION;6.8Kohm,10%,1/2W,AA,TP,3.7	
....4 PCB	AA41-00600E	PCB-CRT;HCM4215W,FR-1,1L,E,1.6T,245X197(	S.N.A
....4 T0083	0402-000243	DIODE-RECTIFIER;RC2-V1,2000V,0.2A,DO-201	
...3 T0076	BP39-00004B	LEAD CONNECTOR-ASSY;P55A/HCM4215W,UL3239	
...3 T0076	BP39-00004C	LEAD CONNECTOR-ASSY;P55A/HCM4215W,UL3239	
...3 T0076	BP39-00004C	LEAD CONNECTOR-ASSY;P55A/HCM4215W,UL3239	
...3 T0103	BP59-00005A	MODULE-FOCUS PACK ASS'Y;PJT TV,F301-P03A	
...3 T0076	AA39-20010C	LEAD CONNECTOR-ASSY;,1P,600,YFH800-01,S,	
...3 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
...3	AA63-10002A	BAND-TIE;NYLON66 V2,L100,NTR	S.N.A
...3	6902-000395	BAG PE;LDPE,T0.05,W200,L140,,,	S.N.A
..2 T0098	BP94-00238A	ASSY PCB MISC-VM;DP,HCM4215W3S/XAA,P55A	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3 RZ120	2008-001097	R-FUSIBLE(S);33OHM,5%,1/2W,AC,BK,2.5X6.5	
...3 T0121	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
...3 T0079	AA33-00017A	MAGNET CONVERGENCE;JH 92LT - 29G,-,29.1M	
...3 T0076	AA39-20055C	LEAD CONNECTOR-ASSY;,6P,500,YBNH025-06,6	
...3 QZ102	AA96-00243L	ASSY H/S;-,CRT,AA62-000450A,2SC2344,HERC	S.N.A
....4	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4 T0090	0502-000153	TR-POWER;2SC2344-D,NPN,1.2W,TO-220,-,60	
....4 T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
....4	AA62-00045A	HEAT SINK-PS;-,-,T1.0,-,-,DREAM,-,-,-,-,	S.N.A
...3 QZ101	AA96-00243M	ASSY H/S;-,AMP,AA62-000450A,2SA1011,HERC	S.N.A
....4	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4 T0090	0502-000131	TR-POWER;2SA1011-D,PNP,1.2W,TO-220,-,60	
....4 T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
....4	AA62-00045A	HEAT SINK-PS;-,-,T1.0,-,-,DREAM,-,-,-,-,	S.N.A
...3	AA97-07230M	ASSY AUTO-VM;COMMANDO	S.N.A
....4 DZ106	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 DZ105	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 DZ102	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 QZ103	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4 QZ106	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 QZ105	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 QZ104	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 RZ122	2001-000019	R-CARBON(S);100HM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R125	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000554	R-CARBON;270OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000666	R-CARBON;33OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000832	R-CARBON;510OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ110	2001-001100	R-CARBON(S);2.7OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RZ104	2001-001100	R-CARBON(S);2.7OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RZ105	2001-001139	R-CARBON(S);39KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RZ106	2001-001139	R-CARBON(S);39KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RZ114	2003-000532	R-METAL OXIDE(S);18ohm,5%,2W,AF,TP,4x12m	
....4 RZ103	2003-000713	R-METAL OXIDE(S);47ohm,5%,2W,AF,TP,4x12m	
....4 RZ111	2003-000713	R-METAL OXIDE(S);47ohm,5%,2W,AF,TP,4x12m	
....4 RZ123	2003-002157	R-METAL OXIDE;220OHM,5%,2W,AG,TP,6X16MM	
....4 RZ113	2003-002157	R-METAL OXIDE;220OHM,5%,2W,AG,TP,6X16MM	
....4 RZ112	2003-002157	R-METAL OXIDE;220OHM,5%,2W,AG,TP,6X16MM	

Loc. No.	Code No.	Description ; Specification	Remark
....4 RFZ101	2008-001086	R-FUSIBLE(S);3.3ohm,5%,2W,AG,TP,3.9x12mm	
....4 C598	2201-000193	C-CERAMIC,DISC;0.01NF,0.25PF,50V,C0G,TP,	
....4 C598	2201-000193	C-CERAMIC,DISC;0.01NF,0.25PF,50V,C0G,TP,	
....4 C598	2201-000516	C-CERAMIC,DISC;4.7NF,+100-0%,500V,Y5U,TP	
....4 C598	2201-000516	C-CERAMIC,DISC;4.7NF,+100-0%,500V,Y5U,TP	
....4 C598	2201-000604	C-CERAMIC,DISC;0.056NF,+100-0%,500V,SL,T	
....4 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000832	C-AL;220uF,20%,25V,GP,TP,8x11.5,5	
....4 C701	2401-001157	C-AL;33uF,20%,160V,GP,TP,12.5x20,5	
....4 C701	2401-001220	C-AL;4.7uF,20%,160V,GP,TP,8x11.5,5	
....4 C701	2401-001220	C-AL;4.7uF,20%,160V,GP,TP,8x11.5,5	
....4 C701	2401-001513	C-AL;47uF,20%,16V,WT,TP,5x11,5	
....4 C701	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
....4 LZ101	2701-000002	INDUCTOR-AXIAL;100uH,10%,4.2x9.8mm	
....4 CN906	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
....4 CN906	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
....4 CN906	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
....4 PCB	AA41-00611A	PCB-VM;HCM4215W,FR-1,1L,A,1.6T,245X245,P	S.N.A
...3 T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
..2 T0105	BP94-00239A	ASSY PCB MISC-DY-JACK;DP,HCM4215W3S/XAA,	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3 GT13	AA60-40012D	PIN-GT,ASSY;T1.6,6-12.5-,NYLON66	S.N.A
...3 GT09	AA60-40012D	PIN-GT,ASSY;T1.6,6-12.5-,NYLON66	S.N.A
...3 GT05	AA60-40012D	PIN-GT,ASSY;T1.6,6-12.5-,NYLON66	S.N.A
...3 GT01	AA60-40012D	PIN-GT,ASSY;T1.6,6-12.5-,NYLON66	S.N.A
...3	AA61-01197A	HOLDER-PCB,DY;COMANDO,ABS V0,BLK	S.N.A
...3	AA97-07230N	ASSY AUTO;COMMANDO	S.N.A
....4 R301	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4	
....4 R302	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4	
....4 R303	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4	
....4 PCB	AA41-00632A	PCB-DY CONNECTION;HCM4215W,FR-1,1L,A,1.6	S.N.A
..2 T0098	BP94-00517Q	ASSY PCB MISC-CONTROL;DP, ST54T8PCS/XAX,	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3 LEDY01	0601-001381	LED;ROUND,RED/GRN,5.0MM,650/563NM	
...3 T0121	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
...3 SWY08	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3 SWY07	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3 SWY06	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3 SWY05	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3 SWY01	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3 SWY02	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3 SWY03	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3 SWY04	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3 CN906	3711-000447	CONNECTOR-HEADER;BOX,3P,1R,2.5MM,ANGLE,-	
...3 CN906	3711-003353	CONNECTOR-HEADER;BOX,11P,1R,2.5mm,ANGLE,	
...3 RMY01	AA32-00012A	MODULE REMOCON;ORC-50HF2,38KHZ,940NM,MES	
...3 T0076	AA39-00223A	LEAD CONNECTOR-ASSY;,11P,800MM,67096-011	
...3 T0076	AA39-00259A	LEAD CONNECTOR-ASSY;,UL1007#26,UL/CSA,3P	
...3	BP97-00511J	ASSY AUTO-CONTROL;ST54T8,P55A	S.N.A
....4 DZ016	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
....4 DZ016	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
....4 QY01	0504-000123	TR-DIGITAL;KSR1010,NPN,300mW,10K,TO-92,T	
....4 RY07	2001-000020	R-CARBON(S);22OHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 RY09	2001-000109	R-CARBON(S);470OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000832	R-CARBON;510OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000832	R-CARBON;510OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000832	R-CARBON;510OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RY08	2001-001108	R-CARBON(S);22KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 C701	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
....4	BP41-00040A	PCB CONTROL;ST54T8,CONTROL,1L,1.6T,245*2	S.N.A
..2 T0100	BP94-00564F	ASSY PCB MISC-A/V FRONT;ST54T8PCS/XAX,P5	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3 SW101	3404-000208	SWITCH-TACT;12V,50mA,120gf,6x6mm,SPST	
...3 CN906	3711-000447	CONNECTOR-HEADER;BOX,3P,1R,2.5MM,ANGLE,-	
...3 CN906	3711-003601	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,ANGLE,	
...3 JK101	3722-000544	JACK-VHS;4P,11.5mm,AG,BLK,N	
...3 JK102	3722-001164	JACK-PIN;3P,3.4mm,SN,WH:YE:RE,#16-22	
...3 T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
...3 T0076	AA39-00260A	LEAD CONNECTOR-ASSY;,UL1007#26,UL/CSA,3P	
...3	AA63-10002A	BAND-TIE;NYLON66 V2,L100,NTR	S.N.A
...3 T0147	AA91-00762U	ASSY-JACK SIDE;54/62T8,SV704P,XAX	
....4	AA61-00793E	HOLDER-SIDE AV;47H1,ABS HB,GRAY,SV-704P	S.N.A
....4 T0150	AA64-02085F	DOOR-AV;H1,ABS HB,GRAY,SV-704P	
....4	AA64-02086F	INLAY-AV;W3,PS SHEET,T0.5,P54A XAC	S.N.A
...3	AA97-07429A	ASSY AUTO-A/V FRONT;HCM4215WX/XAA,P55A	S.N.A

Loc. No.		Code No.	Description ; Specification	Remark
....4	R125	2001-000006	R-CARBON;2.4KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	PCB	AA41-00499B	PCB-FRONT A/V;SVP-54T6SR,FR-1,1L,A,1.6T,	S.N.A
...3	CNW01A	BP39-00016B	LEAD CONNECTOR;HCL4715WB,UL2547#26,UL/CS	
..2		BP95-00147D	ASSY SUB PCB-SENSOR;DP,P54A,SENSOR	
...3		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3		AA69-01808B	BAG-SHEET;,LDPE(ANTISTATIC),T0.05,800,50	S.N.A
...3		BP97-00208A	ASSY SMD;0	S.N.A
....4	Q01	0501-000342	TR-SMALL SIGNAL;KSC1623-Y,NPN,200mW,SOT-	
....4	PCB	AA41-00853A	PCB-SERSOR;SVP-42W5HRC,FR-4,2L,A,1.6T,24	S.N.A
....4	D01	BP32-00001A	SENSOR PHOTO;BCS5030G1,-40 TO +85,0.42 U	
....4	R01	2007-000305	R-CHIP;10Mohm,5%,1/10W,TP,1608	
....4	R02	2007-000109	R-CHIP;1Mohm,5%,1/10W,TP,1608	
....4	R03	2007-000109	R-CHIP;1Mohm,5%,1/10W,TP,1608	
....4		0202-001167	SOLDER-CREAM;RX3603-2330HO,S45A,PASTE,SN	S.N.A
...3	CN906	3711-000447	CONNECTOR-HEADER;BOX,3P,1R,2.5MM,ANGLE,-	

ASSY P/MATERIAL

1		BP92-00526B	ASSY P/MATERIAL;ST54T8PCS/XAX,J54A	S.N.A
..2		AA60-40006A	PIN-STAPLE;AUTO,33X17.8X2.4,H18,33X17.8X	S.N.A
..2		AA61-00049B	HOLDER-BOX;-,PP,-,-,-,NTR,V0,AA61-20285A	S.N.A
...3		AA61-20285A	HOLDER-BOX;3456,PP,-,-,-,WHT,VO	S.N.A
..2		AA63-10007C	BAND-PP;W18,CLEA,1G	S.N.A
..2		AA69-00305A	BAG AIR;ALL,LDPE,1000,500,CLR,	S.N.A
..2		AA69-00306A	BAG AIR;LDPE,-,1800,1000,CLR,ASSY,ALL,-	S.N.A
..2		AA69-00744L	BAG-SHEET;-,HDPE PE FOAM,T0.015,W1650,H1	S.N.A

ASSY ACCESSORY

1	M0016	BP92-00577F	ASSY ACCESSORY;ST54T8PCS/XAX,P55A	S.N.A
..2		6902-000018	BAG PE;LDPE,T0.1,W280,L400,GRY,8,2-	S.N.A
..2	T0116	AA39-00006A	CABLE RCA;,3000MM	
..2	T0074	AA59-00262A	REMOCON;,TM63,COMMONDO,48,G6671B,EX,S/S	
...3	T0122	2802-000194	RESONATOR-CERAMIC;8MHz,1.0%,TP,8.5x4.5x5	
...3	T0119	AA09-00275A	IC MICOM;Z86L8808SSC-R51PX,SOP,ST,SZTM-8	
..2	T0113	AA61-20126A	HOLDER-LEG;-,ABS,-,-,-,BLK,HB	
..2	W/C	AA68-00559C	CARD WARRANTY;-,-,W/P150(G),-,138X212,-,	S.N.A
..2		AA68-00560A	CARD-SVC NETWORK;-,W/P100(G),-,-,SEM,1',	S.N.A
..2		AA69-30009C	BAG-SHEET;LDPE,T0.08,W150,L120,-,-,-	S.N.A
..2	CIS	BP68-00056B	MANUAL USERS;ST47W3PC,ENG,W/P 100g,P55A,	S.N.A
..2	CIS	BP68-00057B	MANUAL USERS;ST47W3PC,SPA,W/P 100g,P55A,	S.N.A

ASSY K/D-CPT

1		BP98-00180A	ASSY K/D-CPT;ST54T8PCS/XAX,P55A	S.N.A
..2	T0026	BP98-00181A	ASSY K/D-CPT R;ST54T8PCS/XAX,P55A	
...3		AA03-00200A	CRT MONO;P16LSG03RJA,FREE,3.30mH,2.20mH,	S.N.A
...3	T0117	AA26-30006F	TRANS FBT-ANODE CAP ASS'Y;-,FWZ-50A001C,	
...3	T0078	AA27-00249A	DEFLECTION YOKE;-,DPD-5292AA,S/S,7,29.1	
...3	T0079	AA33-00016A	MAGNET CONVERGENCE;JH 92LT - 29F,-,29.1M	
...3	T0076	AA39-00018A	LEAD CONNECTOR-ASSY;,UL1015#22,UL/CSA,1P	
...3		AA60-00125B	SPACER-CRT;PROJ,SILICONE,D/GRAY	S.N.A
...3		AA60-00126B	SPACER-CAP;PROJ,EPDM,BLK	S.N.A
...3		AA60-00127B	SPACER-LENS;PROJ,SILICONE,D/GRAY	S.N.A
...3	T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
...3		AA61-00056B	BRACKET-LENS;PROJECTION,SECC,T1.6,-,-,-,	S.N.A
...3		AA61-00809B	HOLDER-CRT;PROJ,PC/ABS GF 20%,BLK	S.N.A
...3	T0114	AA61-00810B	HOLDER-CAP;PROJ,PC,CLR	
...3		AA63-00076A	SPACER-LENS;PROJECTION,FELT ,-,-,-,BROWN	S.N.A
...3	T0109	AA67-00147A	LENS-ASSY;,DELTA 78,CLEAR A/B	
...3	T0051	AA67-10008A	LENS;-,DELTA,RED,PJT,-,77,79,-	
...3		BP61-00079A	HOLDER-DY;,PJTV,T0.5,NYLON66 V2	S.N.A
...3		AA61-00845A	CASE-COUPLER,R;DP,PROJ,AA61-00806B	S.N.A
....4		AA61-00806B	CASE-COUPLER,R;PROJ,ALDC,T8,BLK	S.N.A
....4		AA63-10007C	BAND-PP;W18,CLEA,1G	S.N.A
...3	T0107	AA91-00735A	ASSY-BRKT,CRT;DP,AA91-00722A,PROJ	
....4	T0107	AA91-00722A	ASSY-BRKT,CRT;,SECC T1.6,PROJ	
.....5	T0072	AA61-00473B	BRACKET-CRT;53,SECC,T1.6,-,-,-,-	S.N.A
.....5		AA61-00615B	BRACKET-EARTH;54J8,PBS,T0.5,-,-,-,-	S.N.A
.....5		AA61-00812A	SPRING ETC-WIRE;PROJ,STS,3.6	S.N.A
..2	T0027	BP98-00182A	ASSY K/D-CPT G;ST54T8PCS/XAX,P55A	
...3		AA03-00201A	CRT MONO;P16LSG03HKA,FREE,3.30mH,2.20mH,	S.N.A
...3	T0117	AA26-30006F	TRANS FBT-ANODE CAP ASS'Y;-,FWZ-50A001C,	
...3	T0078	AA27-00249A	DEFLECTION YOKE;-,DPD-5292AA,S/S,7,29.1	
...3	T0076	AA39-00018A	LEAD CONNECTOR-ASSY;,UL1015#22,UL/CSA,1P	
...3		AA60-00125B	SPACER-CRT;PROJ,SILICONE,D/GRAY	S.N.A
...3		AA60-00126B	SPACER-CAP;PROJ,EPDM,BLK	S.N.A
...3		AA60-00127B	SPACER-LENS;PROJ,SILICONE,D/GRAY	S.N.A
...3	T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
...3		AA61-00056B	BRACKET-LENS;PROJECTION,SECC,T1.6,-,-,-,	S.N.A
...3		AA61-00809B	HOLDER-CRT;PROJ,PC/ABS GF 20%,BLK	S.N.A
...3	T0114	AA61-00810B	HOLDER-CAP;PROJ,PC,CLR	
...3		AA63-00076A	SPACER-LENS;PROJECTION,FELT ,-,-,-,BROWN	S.N.A
...3	T0109	AA67-00147A	LENS-ASSY;,DELTA 78,CLEAR A/B	
...3	T0051	AA67-10007A	LENS;-,DELTA,CLEAR,PJT,-,77,79,-	
...3		BP61-00079A	HOLDER-DY;,PJTV,T0.5,NYLON66 V2	S.N.A
...3	T0107	AA91-00735A	ASSY-BRKT,CRT;DP,AA91-00722A,PROJ	
....4	T0107	AA91-00722A	ASSY-BRKT,CRT;,SECC T1.6,PROJ	
.....5	T0072	AA61-00473B	BRACKET-CRT;53,SECC,T1.6,-,-,-,-	S.N.A
.....5		AA61-00615B	BRACKET-EARTH;54J8,PBS,T0.5,-,-,-,-	S.N.A
.....5		AA61-00812A	SPRING ETC-WIRE;PROJ,STS,3.6	S.N.A
...3		AA61-00847A	CASE-COUPLER,B;DP,PROJ,AA61-00808B	S.N.A
....4		AA61-00808B	CASE-COUPLER,B;PROJ,ALDC,T8,BLK	S.N.A
....4		AA63-10007C	BAND-PP;W18,CLEA,1G	S.N.A

You can search for the updated part code through ITSELF web site.
URL : http://itself.sec.samsung.co.kr

7-4 HCN4727W5S/XAA

Loc. No.		Code No.	Description ; Specification	Remark
			ASSY SKD PART	
1		AA92-07174A	ASSY SKD PART;HCN4727W5S/XAA,P55A	S.N.A
..2	T0121	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
..2	T0118	AA26-00101A	TRANS FBT-H/V DISTRIBUTOR;FWZ50A001E/FFA	
..2		AA63-10002A	BAND-TIE;NYLON66 V2,L100,NTR	S.N.A
..2		AA65-30018A	CLAMPER CORE-WIRE;DONG-A,NYLON-66,-,-,-	S.N.A
..2		AA65-30104C	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,	S.N.A
⚠ ..2	T0066	AA96-00156A	ASSY POWER CORD;-,EP2/YES(US),H/C100MM,K	
...3		3811-000401	WIRE-PVC CU;BCWA,300V,ROLL,17/0.16mm,#22	S.N.A
...3	T0077	AA39-10007Y	CBF POWER CORD;-,EP2/YES,SPT-2 18AWGx2C,	
...3		AA61-20284A	HOLDER;P-CORD,PP,-,-,-,BLK,VO,KE-002	S.N.A
...3		AA63-10002B	BAND-TIE;NYLON66 V2,L140,NTR	S.N.A
...3	T0121	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
			ASSY COVER FRONT	
1	M0001	BP90-00150B	ASSY COVER FRONT;,P55A	S.N.A
..2	T0081	6002-000522	SCREW-TAPPING;TH,+,2,M4,L15,ZPC(BLK),SWR	
..2	T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
..2	T0081	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	S.N.A
..2	T0081	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	S.N.A
..2	T0081	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	S.N.A
..2	T0081	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	S.N.A
..2	T0081	6003-001135	SCREW-TAPTITE;TH,+,B,M4.0,L15,BLK,SWRCH1	S.N.A
..2	HC+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	S.N.A
..2	HC+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	S.N.A
..2	HC+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	S.N.A
..2	HC+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	S.N.A
..2	HC+CW	6005-001003	SCREW-WOOD;HH,+,M4,L19,ZPC(BLK),SWRCH18A	S.N.A
..2	HC+CW	6005-001005	SCREW-WOOD;HH,+,M4.0,L19,NI PLT,SWRCH18A	S.N.A
..2	BCM+CW	6006-001094	SCREW-ASS'Y WOOD;WW,HH,+,M7,L32,ZPC(YEL)	S.N.A
..2	T0076	AA39-00284A	LEAD CONNECTOR-ASSY;SVP-47W3HD,UL2547#26	
..2		AA60-00072B	SPACER-COVER,DUST;43,54,62J9,SPONGE 94HF	S.N.A
..2	T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
..2	T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
..2	T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
..2	T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
..2	T0115	AA61-00617B	BRACKET-CRT,MAIN;DP,54J7,AA61-00475B	S.N.A
...3	T0115	AA61-00475B	BRACKET-CRT,MAIN;54,SECC,T1.6,-,-,-,-	
...3		AA63-10007C	BAND-PP;W18,CLEA,1G	S.N.A
..2		AA61-00618C	GUIDE-FLOW;54J8,J7,ABS,IVORY,V0	S.N.A
..2	T0069	AA63-60002V	SPACER-FELT;-,FELT,-,-,-,BLK,T0.3,-,60X4	S.N.A
..2	T0110	AA67-00136A	SUN SCREEN-AG;47W,1072*614*,T=82%,G=110	
..2		AA98-00333M	ASSY K/D-SPEAKER;20W(3001-001107),8 OHM	S.N.A
...3	T0082	3001-001107	SPEAKER;20W,8OHM,95DB,1300HZ	
...3	T0082	3001-001134	SPEAKER;30W,8OHM,93DB,60HZ	
...3	T0076	AA39-00042A	LEAD CONNECTOR-ASSY;,2.2UF,200MM,REC,REC	
...3		AA98-00049A	ASSY-LEAD,CON;-,LEAD-CON,CORE,AA39-20505	S.N.A
....4	T0121	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
..2	T0064	BP65-00005A	CLAMPER CORE;52Q7,NYLON	S.N.A
..2		BP98-00184A	ASSY K/D-WOOD;47W7,XAA	S.N.A
...3	HC+CW	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,-,-,ZP	S.N.A
...3	HC+CW	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,-,-,ZP	S.N.A
...3	HC+CW	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,-,-,ZP	S.N.A
...3	HC+CW	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,-,-,ZP	S.N.A
...3	HC+CW	AA60-10051A	SCREW-WOOD;-,SWRCH18A,M4,L16,PH,+,-,-,ZP	S.N.A
...3		AA61-00094C	HOLDER-RAIL;PCJ533R,ABS,-,-,-,BLK,HB,480	S.N.A
...3		AA61-00507B	HOLDER-CABINET,WOOD;43,54,62J8,ABS,-,-,-	S.N.A
...3		AA61-00616B	HOLDER-CRT,MAIN;54J7,DP,-,-,-,-,AA61-005	S.N.A
....4		AA61-00506B	HOLDER-CRT,MAIN;43,54,62J8,HIPS,-,-,-,BL	S.N.A
...3		AA61-10247A	BRACKET-FOCUS;S46DS,SECC,T1.0,-,-,-,-	S.N.A
...3		AA63-00384A	COVER-DUCT;DP 54J8,-,-,-,-,HB,-,AA63-003	S.N.A
....4		AA63-00348B	COVER-DUCT;54,62J8,HIPS,-,-,-,HB,BLK,-	S.N.A
...3		AA64-02536B	CABINET-HANDLE WOOD;47W7,HIPS,HB,GRY,DG7	S.N.A
...3		BP61-00075A	HOLDER-JERSEY,ASSY;W3,ABS V0,GRAY,63-000	S.N.A
....4	T0069	AA63-00099C	SPACER-FELT;47W3,FELT,BLK,T0.35,30*30	S.N.A
....4		AA61-00508D	HOLDER-JERSEY;W3,ABS V0,GRAY,G4309	S.N.A
...3		BP61-00207A	HOLDER-FOOT;47W7,HIPS HB BLK,,,,,	S.N.A
...3		BP61-00210A	HOLDER-WOOD,TOP;55W7,ABS HB BLK,,,,,	S.N.A
...3		BP64-00237A	CABINET-WOOD;47W7,WOOD,DE8326 D/GRY	S.N.A
...3		AA61-00097A	HOLDER-WIRE;-,NYLON 6/6,-,-,-,NTR,-	S.N.A
...3		AA61-00458B	CASTER;-,TP4020-05 PLY,-,OH56,-,-,SR44.4	S.N.A
...3		AA61-00858C	BRACKET-FRAME;,SECC,T2.0,NO-R PJTV	S.N.A
...3	HC+CW	AA60-10051B	SCREW-WOOD;-,SWRCH18A,M3.5,L11,RH,+,-,-	S.N.A
...3		AA60-00078B	SPACER-DUAL,LOCK;W3,#250,19*40	S.N.A
...3		BP61-00210B	HOLDER-WOOD,SIDE;ABS,47W7,HB,650,BLK	S.N.A
...3		AA61-20129D	HOLDER-WIRE;NYLON NTR,W7	S.N.A
..2		BP98-00185A	ASSY K/D-FRONT MASK;47W7,XAA	S.N.A
...3	T0057	BP64-00177A	BADGE-BRAND;ALL,AL,T1.5,70,11.3,,BLK,SIL	S.N.A
...3	T0017	BP64-00201A	CABINET FRONT-MASK;47W7,HIPS HB,GRY,DGM1	S.N.A
...3	T0102	BP73-00004A	RUBBER-CAP;42W5,SILICONE,WHT,RUBBER	
...3	T0067	BP60-00032A	SPACER-SCREEN;47W7,EVA SPONGE,600,BLK,T1	S.N.A
...3	T0067	BP60-00032B	SPACER-SCREEN;47W7,EVA SPONGE,1000,BLK,T	S.N.A
..2		BP98-00188A	ASSY K/D-FRONT BOT;HCN4727WSCXAA	S.N.A
...3	T0081	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
...3	T0081	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
...3	T0069	AA60-00091R	SPACER-FELT;,FELT,250X10,,,BLK,T0.5,,	S.N.A
...3	CIS7	AA61-60003J	SPRING ETC-CS;-,SUS304,-,-,OD6,N7,OD6,-,	S.N.A
...3		BP60-00031A	SPACER-DUAL LOCK;W7,20.6,3463	S.N.A
...3		BP64-00202A	CABINET FRONT-BOT;47W7,HIPS V0,G4309,SV0	S.N.A
...3	T0023	BP64-00204A	KNOB POWER;47W7,ABS HB,G3676,SVM3132	S.N.A
...3	T0022	BP64-00205A	KNOB CONTROL;47W7,ABS HB,G3676,SVM3132	S.N.A
...3		BP64-00206A	WINDOW REMOCON-LED;47W7,ABS HB,,,,,CLR,	S.N.A
..2	T0053	AA67-00119B	SCREEN FRESNEL;47W,1072*614,T2	
..2	T0056	AA67-00196A	SCREEN-TINT;47W,1070*612,T=0.7,P	
..2		BP61-00350A	HOLDER-SCREEN TOP ASSY;HIPS,47W7,HB,BLK,	S.N.A
...3	T0081	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
...3		BP61-00158A	HOLDER-SENSOR;52Q7,PC,VIOLET	S.N.A
...3		BP61-00211A	HOLDER-SCREEN TB;47W7,HIPS HB BLK,,,,,	S.N.A
...3	T0069	AA60-00091U	SPACER-FELT;W7,L1035,BLK,T0.35,W10	S.N.A
..2		BP61-00350B	HOLDER-SCREEN BOT ASSY;HIPS,47W7,HB,BLK,	S.N.A
...3	T0081	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
...3		BP61-00158A	HOLDER-SENSOR;52Q7,PC,VIOLET	S.N.A
...3		BP61-00211A	HOLDER-SCREEN TB;47W7,HIPS HB BLK,,,,,	S.N.A
...3	T0064	BP65-00005A	CLAMPER CORE;52Q7,NYLON	S.N.A
...3	T0069	AA60-00091U	SPACER-FELT;W7,L1035,BLK,T0.35,W10	S.N.A
..2		BP61-00352A	HOLDER-SCREEN SIDE ASSY;HIPS,47/55W7,HB,	S.N.A
...3	T0081	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	
...3		BP61-00158A	HOLDER-SENSOR;52Q7,PC,VIOLET	S.N.A
...3		BP61-00209A	HOLDER-SCREEN SIDE;55W7,HIPS HB BLK,,,,,	S.N.A
...3	T0069	AA60-00091T	SPACER-FELT;W7,L635,BLK,T0.35,W10	S.N.A
			ASSY COVER REAR	
1	M0002	BP90-00153B	ASSY COVER REAR;,P55A	S.N.A
..2	DVI+TB	6006-001095	SCREW-ASS'Y TAPT;WP,BH,+,M4,L12,ZPC(YEL)	S.N.A
..2	T0069	AA60-00091N	SPACER-FELT;-,FELT,70X10,-,-,BLK,T1.0,-,	S.N.A
..2		AA61-01134A	HOLDER-MIRROR,BOT;43,54T6,HIPS HB,BLK	S.N.A
..2		AA64-60421C	INLAY-COVER;-,PS,T0.3,-,-,BLK,SEA	S.N.A
..2		AA64-60449B	INLAY-COVER;SP-434JMF,PS,T0.5,149.3X69.5	S.N.A
..2		AA65-30008A	CLAMPER CORE-CORD;-,PE,HB,-,BLK,-	S.N.A
..2	T0106	AA91-00751A	ASSY-BRACKER,MIRROR;,47W3	
...3	T0069	AA60-00073G	SPACER-FELT;PJT,FELT,T1.0,800*7	S.N.A
...3		AA61-00783B	BRACKET-MIRROR;47W3,SECC,T1.0	S.N.A
..2		AA91-00921A	ASSY-HOLDER,MIRROR;,HIPS HB BLK,47W3	S.N.A
...3	T0069	AA60-00091A	SPACER-FELT;-,FELT,150X10,-,-,BLK,T0.35,	S.N.A
...3		AA61-00879A	HOLDER-MIRROR,SIDE(R);47W3,HIPS HB,BLK	S.N.A
..2		AA91-00921B	ASSY-HOLDER,MIRROR;,HIPS HB BLK,47W3	S.N.A
...3	T0069	AA60-00091A	SPACER-FELT;-,FELT,150X10,-,-,BLK,T0.35,	S.N.A
...3		AA61-00879B	HOLDER-MIRROR,SIDE(L);47W3,HIPS HB,BLK	S.N.A
..2	T0015	BP64-00203A	CABINET BACK-BOT;47W7,HIPS V0,BLK	S.N.A

Loc. No.		Code No.	Description ; Specification	Remark
...3		0103-000161	RESIN-HIPS;BASFK456M,BLK,-,V0	S.N.A
..2	T0092	BP96-00077L	ASSY COVER P-TERMINAL,ANT;DP WIDE PJT,HI	
...3	T0092	BP96-00038H	ASSY COVER P-TERMINAL,ANT;WIDE PJT,HIPS	
....4		AA64-02836J	INLAY-TERMINAL,NT;WIDE PJT,PS SHEET,T0.5	S.N.A
....4		AA65-00023A	TERMINAL-BOARD,ANT;,HIPS V0,BLK	S.N.A
..2	T0112	AA64-02061B	CABINET-BACK,TOP;47W3,HIPS HB,BLK,DO	
..2	T0111	AA64-02065C	CABINET-BACK,SIDE;47.55W3,HIPS V0,BLK	
..2	T0108	AA67-00181A	MIRROR-BACK;47W3,GLASS,861*677*421,T3.0	

ASSY CHASSIS

1	M0017	BP91-00917A	ASSY CHASSIS;HCN4727WSC/XAA,P55A	S.N.A
..2		BP91-00801R	ASSY MISC-CHASSIS PACK;DP,HCN4727WSC/XAA	S.N.A
...3	T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
...3	T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
...3	T0070	AA61-01127A	HOLDER-CHASSIS;COMMANDO,HIPS V0,G4309	S.N.A
...3		AA98-01177B	ASSY K/D-P/MATERIAL;PJTV(COMANDO),P55A	S.N.A
....4		AA63-10007C	BAND-PP;W18,CLEA,1G	S.N.A
....4		AA69-01808A	BAG-SHEET;,LDPE(ANTISTATIC),T0.05,950,90	S.N.A
....4		AA69-01403A	WRAP VINYL-PACKING;SKD CHASSIS,LDPE,T0.0	S.N.A
...3	T0073	BP94-00500C	ASSY PCB MAIN;HCN4727WSC/XAA,P55A	
....4		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
....4	IC802	1203-000119	IC-NEGA.FIXED REG.;7905,TO-220,3P,-,PLAS	
....4	IC012	1203-000165	IC-POSI.ADJUST REG.;78R12,TO-220,4P,-,PL	
....4	C701	2401-000737	C-AL;2200uF,20%,50V,GP,TP,18x35.5,7	
....4	C701	2401-001068	C-AL;3300uF,20%,50V,GP,BK,22x40,10	
....4	X601	2801-004020	CRYSTAL-UNIT;18.432MHz,30ppm,28-AAM,12pF	
....4	CNW01	3703-001150	CONNECTOR-BACK PANEL;32P,2R,FEMALE,STRAI	
....4	CNW02	3703-001150	CONNECTOR-BACK PANEL;32P,2R,FEMALE,STRAI	
....4	CNZ01	3703-001150	CONNECTOR-BACK PANEL;32P,2R,FEMALE,STRAI	
....4	CN901	3703-001187	CONNECTOR-BACK PANEL;64P,2R,FEMALE,STRAI	
....4	CN906	3711-003046	CONNECTOR-HEADER;BOX,9P,1R,2.5MM,STRAIGH	
....4	CN906	3711-003641	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,STRAIG	
....4	CN906	3711-003973	CONNECTOR-HEADER;BOX,11P,1R,2.5mm,STRAIG	
....4	CN906	3711-003975	CONNECTOR-HEADER;BOX,14P,1R,2.5mm,STRAIG	
....4	CN906	3711-004946	CONNECTOR-HEADER;BOX,15P,1R,2.5MM,STRAIG	
....4	JA703	3722-001163	JACK-VHS;4P,12mm,AU,BLK,N	
....4	JA701	3722-001426	JACK-PIN;9P,3.4mm,NI,BLK,-	
....4	JA704	3722-001796	JACK-PIN;7P(10P),-,NI,RD/RD/WH/WH/RD/BL/	
....4	JA702	3722-001871	JACK-PIN;5P(9P),8.3MM,NI,GRN/BLU/RED/WHT	
....4	L802	AA27-10001C	COIL CHOKE;-,100uH,K,-,5.0A,ST,700UH-K(R	
....4	L801	AA29-00004A	FILTER LINE NOISE;-,20UH,3A,AC80-260V,TQ	
....4	T0076	AA39-20010B	LEAD CONNECTOR-ASSY;,1P,500,YFH800-01,S,	
....4	T0076	AA39-20010B	LEAD CONNECTOR-ASSY;,1P,500,YFH800-01,S,	
....4	TU02	AA40-00049A	TUNER;TCPN3081PC19C(S),TCPN3081PC19C(S),	
....4	TU04	AA40-00049A	TUNER;TCPN3081PC19C(S),TCPN3081PC19C(S),	
....4	TU01	AA59-00164A	MODULE-RF,SPLITTER;-,UMX-NT-005,-,2IN/3O	
....4		AA63-00396B	SHIELD CASE-TOP;PRJT,P54A,SPTE,T0.5,-,-,	S.N.A
....4		AA63-00397B	SHIELD CASE-BOT;PRJT,P54A,SPTE,T0.5,-,-,	S.N.A
....4		AA63-00610A	SHIELD CASE;COMMANDO,SPTE,T0.5,W141.5,H1	S.N.A
....4		AA63-10002A	BAND-TIE;NYLON66 V2,L100,NTR	S.N.A
....4		AA65-30018A	CLAMPER CORE-WIRE;DONG-A,NYLON-66,-,-,-,	S.N.A
....4		AA65-30111A	CLAMPER CORE-WIRE;ALL MODEL,NYLON,V0,-,W	S.N.A
....4	T0104	AA95-02001K	ASSY SUB-PCB MICOM;,C2	
.....5	T0083	0402-000274	DIODE-RECTIFIER;UF4004,400V,1A,DO-41,TP	
.....5	Q409	0505-000109	FET-SILICON;2N7000,N,60V,200mA,5ohm,400m	
.....5	Q409	0505-000109	FET-SILICON;2N7000,N,60V,200mA,5ohm,400m	
.....5	IC904	1203-001943	IC-VOL. DETECTOR;7025,TO-92,3P,-,PLASTIC	
.....5	X901	2801-004071	CRYSTAL-UNIT;6MHZ,30PPM,28-AAM,20PF,40OH	
.....5	CN901	3703-001175	CONNECTOR-BACK PANEL;64P,2R,MALE,ANGLE,A	
.....5		AA97-07275A	ASSY SMD;SVP-47W3HRT,P55A, , ,	S.N.A
.....6	D905	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....6	D906	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....6	D920	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....6	D923	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....6	D602	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....6	D901	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....6	D902	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....6	DZ016	0403-001375	DIODE-ZENER;RLZ3.6B,3.6-3.845V,500mW,LL-	
.....6	DZ016	0403-001375	DIODE-ZENER;RLZ3.6B,3.6-3.845V,500mW,LL-	
.....6	DZ016	0403-001375	DIODE-ZENER;RLZ3.6B,3.6-3.845V,500mW,LL-	
.....6	DZ016	0403-001375	DIODE-ZENER;RLZ3.6B,3.6-3.845V,500mW,LL-	
.....6	DZ016	0403-001375	DIODE-ZENER;RLZ3.6B,3.6-3.845V,500mW,LL-	
.....6	DZ016	0403-001375	DIODE-ZENER;RLZ3.6B,3.6-3.845V,500mW,LL-	
.....6	Q915	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....6	Q916	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....6	Q917	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....6	Q920	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....6	Q914	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....6	Q913	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....6	Q910	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....6	Q908	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....6	Q902	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....6	IC112	1103-000180	IC-EEPROM;24C16,2Kx8Bit,SOP,8P,150MIL,10	
.....6	T0087	1203-002302	IC-POSI.FIXED REG.;78RM33D,D-PAK,3P,-,PL	
.....6	IC901	1204-001912	IC-DECODER;SDA5550M,P-MQFP,100P,-,PLASTI	
.....6	R981	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6	R964	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6	R960	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6	R959	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6	R965	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6	R956	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6	R953	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6	R952	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6	R969	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6	R970	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6	R972	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6	R979	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6	R940	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6	R909	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6	R916	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6	R918	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6	R939	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6	R923	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6	R922	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6	R907	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6	R917	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6	R911	2007-000076	R-CHIP;330ohm,5%,1/10W,TP,1608	
.....6	R963	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
.....6	R901	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
.....6	R930	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6	R933	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6	R936	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6	R974	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6	R905	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6	R921	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6	R924	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6	R925	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6	R915	2007-000081	R-CHIP;2.7Kohm,5%,1/10W,TP,1608	
.....6	R913	2007-000081	R-CHIP;2.7Kohm,5%,1/10W,TP,1608	
.....6	R912	2007-000081	R-CHIP;2.7Kohm,5%,1/10W,TP,1608	
.....6	R978	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6	R976	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6	R971	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6	R958	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6	R980	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6	R982	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6	R985	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6	R986	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6	R903	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6	R904	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6	R906	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6	R908	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6	R955	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6	R954	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6	R928	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6	R927	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6	R983	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6	R934	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6	R987	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....6	R957	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....6	R944	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....6	R926	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	
.....6	R975	2007-000121	R-CHIP;820ohm,5%,1/10W,TP,1608	
.....6	R942	2007-000123	R-CHIP;1.5Kohm,5%,1/10W,TP,1608	
.....6	R941	2007-000123	R-CHIP;1.5Kohm,5%,1/10W,TP,1608	
.....6	R914	2007-000123	R-CHIP;1.5Kohm,5%,1/10W,TP,1608	
.....6	R988	2007-000290	R-CHIP;100ohm,5%,1/8W,TP,2012	
.....6	R962	2007-000583	R-CHIP;22Kohm,1%,1/10W,TP,1608	
.....6	R961	2007-000939	R-CHIP;47Kohm,1%,1/10W,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
.....6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6 C120	2203-000189	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6 C120	2203-000221	C-CERAMIC,CHIP;100nF,20%,50V,Y5V,TP,3216	
.....6 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....6 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....6 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....6 C120	2203-000236	C-CERAMIC,CHIP;0.1NF,5%,50V,C0G,TP,1608	
.....6 C120	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012	
.....6 C120	2203-000357	C-CERAMIC,CHIP;0.15NF,5%,50V,C0G,TP,1608	
.....6 C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....6 C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....6 C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....6 C120	2203-000444	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012,-	
.....6 C120	2203-000748	C-CERAMIC,CHIP;0.03NF,5%,50V,C0G,TP,2012	
.....6 C120	2203-000748	C-CERAMIC,CHIP;0.03NF,5%,50V,C0G,TP,2012	
.....6 C120	2203-001048	C-CERAMIC,CHIP;0.56NF,10%,50V,C0G,TP,201	
.....6 C120	2203-005809	C-CERAMIC,CHIP;1000nF,10%,16V,X7R,TP,201	
.....6 C950	2402-000179	C-AL,SMD;47uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....6 C936	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....6 C921	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....6 C918	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....6 C915	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....6 C913	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....6 C938	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....6 C917	2402-001049	C-AL,CHIP;10uF,20%,16V,GP,TP,3.3x3.3x5.4	
.....6 C912	2402-001049	C-AL,CHIP;10uF,20%,16V,GP,TP,3.3x3.3x5.4	
.....6 C911	2402-001049	C-AL,CHIP;10uF,20%,16V,GP,TP,3.3x3.3x5.4	
.....6 L905	2703-001245	INDUCTOR-SMD;8.2uH,10%,2x1.25x1.25mm	
.....6 G101	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.....6 G101	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.....6 G101	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.....6 G101	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.....6 G101	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.....6 G101	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.....6 R949	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 R950	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 R951	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 R945	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 R946	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 R948	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 R966	2007-000931	R-CHIP;470ohm,5%,1/8W,TP,2012	
.....6 PCB	AA41-00599B	PCB-MICOM;HCM4215W,FR-4,2L,B,1.6T,180X24	S.N.A
.....6	0202-001167	SOLDER-CREAM;RX3603-2330HO,S45A,PASTE,SN	S.N.A
.....5 IC902	1102-001130	IC-EPROM;M27W201-80F6,256KX8BIT,DIP,32P,	
.....5	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
....4 IC801	AA96-00475C	ASSY H/S;SILICON-OIL,KA278R09,KA7808,AA6	S.N.A
.....5	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
.....5 T0087	1203-000293	IC-POSI.FIXED REG.;7808,TO-220,3P,-,PLAS	
.....5 T0123	1203-002003	IC-VOLTAGE REGULATOR;278R09,TO-220,4P,-,	
.....5 T0081	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
.....5	AA62-00066B	HEAT SINK;D2,D3,AL ,T1.0,89,70,-,AA62-00	S.N.A
.....5 T0123	1203-001978	IC-VOLTAGE REGULATOR;KA278RA05,TO-220F,4	
....4 IC601	AA96-00623E	ASSY H/S;SCREW,MAIN,AA62-00056A,TDA7265,	S.N.A
.....5	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
.....5 T0124	1201-001026	IC-POWER AMP;7265,ZIP,11P,19.6MIL,DUAL,1	
.....5 T0081	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
.....5	AA62-00056A	HEAT SINK-PS;-,-,T1.0,-,41*35*70,D2,-,-,	S.N.A
....4	BP39-00036A	LEAD CONNECTOR;J54A/SP42W5HP,UL2547#26,U	
....4	BP63-00030A	SHIELD CASE;COMMANDO,SPTE,T0.5,W26.0,L13	S.N.A
....4 T0095	BP95-00142N	ASSY SUB PCB-PRO SCAN;HCN4727WX/XAA,P55A	
.....5	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
.....5 FC48	2305-000011	C-FILM,MPEF;470nF,5%,250V,TP,21.5X13.0X7	
.....5 FC59	2305-000704	C-FILM,MPEF;100nF,5%,250V,TP,16.5x10.3x5	
.....5 FC58	2309-000138	C-FILM,PE-PPF;100nF,5%,50V,TP,20x16x8.5,	
.....5 EX01	2801-004019	CRYSTAL-UNIT;20.25MHz,30ppm,28-AAM,13pF,	
.....5 T0122	2802-001177	RESONATOR-CERAMIC;2.696MHZ,0.4%,BK,10X4.	
.....5 T0122	2802-001179	RESONATOR-CERAMIC;4MHZ,0.5%,BK,8X3X5.5MM	
.....5 CN02	3703-001124	CONNECTOR-BACK PANEL;32P,2R,MALE,ANGLE,A	
.....5 CN01	3703-001124	CONNECTOR-BACK PANEL;32P,2R,MALE,ANGLE,A	
.....5 CN906	3711-001164	CONNECTOR-HEADER;BOX,9P,1R,2.5mm,ANGLE,-	
.....5 CN906	3711-003601	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,ANGLE,	
.....5	BP97-00169A	ASSY SMD;HCM4215WJX/XAA,P55A	S.N.A
.....6 FD13	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....6 FD14	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....6 FD15	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....6 FD16	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....6 FD17	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....6 FD10	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....6 FD01	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....6 FD02	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....6 FD07	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....6 FD08	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....6 FD09	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
.....6 DZ016	0403-000746	DIODE-ZENER;RLZ3.9B,3.89-4.16V,500MW,LL-	
.....6 DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
.....6 DZ016	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
.....6 DZ016	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
.....6 DZ016	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
.....6 DZ016	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
.....6 SQ01	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.....6 FQ13	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.....6 FQ04	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.....6 FQ03	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.....6 FQ02	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.....6 FQ08	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....6 FQ09	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....6 FQ12	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....6 PQ01	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....6 FQ06	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....6 FQ05	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....6 EQ15	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....6 EQ14	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....6 EQ13	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....6 FQ07	0501-000727	TR-SMALL SIGNAL;BC848C,NPN,310mW,SOT-23,	
.....6 Q409	0505-000110	FET-SILICON;2N7002,N,60V,115MA,7.5OHM,0.	
.....6 Q409	0505-000110	FET-SILICON;2N7002,N,60V,115MA,7.5OHM,0.	
.....6 IC104	0801-000662	IC-CMOS LOGIC;74HC123,MULTIVIBATOR,SOP,1	
.....6 IC106	1001-001082	IC-VIDEO SWITCH;BA7657F,-,SOP,24P,300MIL	
.....6 IC06	1203-001211	IC-VOL. DETECTOR;7027,SOT-89,3P,-,PLASTI	
.....6 T0087	1203-002186	IC-POSI.FIXED REG.;18,DPAK,3P,240MIL,PLA	
.....6 T0087	1203-002302	IC-POSI.FIXED REG.;78RM33D,D-PAK,3P,-,PL	
.....6 IC02	1204-001814	IC-SELECTOR;CXA2151Q,QFP,48P,144MIL,PLAS	
.....6 IC01A	1204-001938	IC-DECODER;VSP9407B-B11,MQFP,80P,14X14MM	
.....6 IC118	1204-001989	IC-VIDEO PROCESS;CXA2165Q,QFP,64P,20X14M	
.....6 SR08	2007-000052	R-CHIP;10Kohm,1%,1/10W,TP,1608	
.....6 FR80	2007-000052	R-CHIP;10Kohm,1%,1/10W,TP,1608	
.....6 FR79	2007-000052	R-CHIP;10Kohm,1%,1/10W,TP,1608	
.....6 FR78	2007-000052	R-CHIP;10Kohm,1%,1/10W,TP,1608	
.....6 FR57	2007-000052	R-CHIP;10Kohm,1%,1/10W,TP,1608	
.....6 FR35	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 FR07	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 ER90	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 FR76	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 FR96	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 SR09	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 SR22	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 ER29	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 ER04	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 ER05	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 ER06	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 ER13	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 ER19	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 ER18	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 ER17	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 SR03	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 SR04	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 SR05	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 SR06	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 SR10	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 SR11	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 SR02	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 FR71	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 FR74	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
.....6 FR75	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 FR81	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 FR82	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 SR01	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 SR49	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 SR53	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 SR75	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 YR43	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 YR44	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 YR45	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 SR48	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 SR31	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 SR32	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 SR33	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 SR34	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 SR35	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 SR47	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 ER84	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 FR01	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 FR02	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 FR16	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 FR17	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 FR18	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 ER83	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 CR83	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 CR84	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 ER08	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 ER15	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 ER16	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 ER82	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 FR37	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 FR38	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 FR39	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 FR53	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 FR54	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 FR56	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 FR34	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 FR19	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 FR20	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 FR21	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 FR33	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 FR32	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 FR31	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 SR74	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
.....6 SR21	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
.....6 FR66	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
.....6 ER28	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
.....6 ER27	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
.....6 ER26	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
.....6 SR07	2007-000080	R-CHIP;2Kohm,5%,1/10W,TP,1608	
.....6 FR40	2007-000080	R-CHIP;2Kohm,5%,1/10W,TP,1608	
.....6 FR72	2007-000081	R-CHIP;2.7Kohm,5%,1/10W,TP,1608	
.....6 FR73	2007-000082	R-CHIP;3.3Kohm,5%,1/10W,TP,1608	
.....6 FR62	2007-000082	R-CHIP;3.3Kohm,5%,1/10W,TP,1608	
.....6 FR45	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6 FR44	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6 ER92	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6 ER91	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6 FR42	2007-000086	R-CHIP;5.6Kohm,5%,1/10W,TP,1608	
.....6 FR41	2007-000086	R-CHIP;5.6Kohm,5%,1/10W,TP,1608	
.....6 PR01	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....6 FR60	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....6 FR22	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....6 FR09	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....6 FR58	2007-000092	R-CHIP;15Kohm,5%,1/10W,TP,1608	
.....6 ER24	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	
.....6 ER25	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	
.....6 FR77	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	
.....6 PR02	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	
.....6 ER20	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	
.....6 ER21	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	
.....6 ER22	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	
.....6 ER23	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	
.....6 FR63	2007-000118	R-CHIP;390ohm,5%,1/10W,TP,1608	
.....6 FR70	2007-000124	R-CHIP;2.2Kohm,5%,1/10W,TP,1608	
.....6 FR47	2007-000124	R-CHIP;2.2Kohm,5%,1/10W,TP,1608	
.....6 FR46	2007-000124	R-CHIP;2.2Kohm,5%,1/10W,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
.....6 FR15	2007-000210	R-CHIP;1.1Kohm,5%,1/8W,TP,2012	
.....6 FR14	2007-000210	R-CHIP;1.1Kohm,5%,1/8W,TP,2012	
.....6 FR13	2007-000210	R-CHIP;1.1Kohm,5%,1/8W,TP,2012	
.....6 FR10	2007-000210	R-CHIP;1.1Kohm,5%,1/8W,TP,2012	
.....6 FR11	2007-000210	R-CHIP;1.1Kohm,5%,1/8W,TP,2012	
.....6 FR12	2007-000210	R-CHIP;1.1Kohm,5%,1/8W,TP,2012	
.....6 SR73	2007-000259	R-CHIP;1.6Kohm,5%,1/10W,TP,1608	
.....6 SR26	2007-000309	R-CHIP;10ohm,5%,1/10W,TP,1608	
.....6 SR25	2007-000309	R-CHIP;10ohm,5%,1/10W,TP,1608	
.....6 SR23	2007-000309	R-CHIP;10ohm,5%,1/10W,TP,1608	
.....6 FR36	2007-000691	R-CHIP;3.3Mohm,5%,1/16W,DA,TP,1608	
.....6 FR43	2007-000869	R-CHIP;4.7Kohm,1%,1/10W,TP,1608	
.....6 ER14	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 SR36	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 SR37	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 SR38	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 SR39	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 SR40	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 ER12	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 EC30	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 EC31	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 ER03	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 ER11	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 ER10	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 ER09	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6 C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....6 C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012	
.....6 C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
.....6 C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.....6 C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.....6 C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.....6 C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.....6 C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.....6 C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.....6 C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.....6 C120	2203-000257	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,1608	
.....6 C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....6 C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....6 C120	2203-000440	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,1608,-	
.....6 C120	2203-000491	C-CERAMIC,CHIP;2.2nF,10%,50V,X7R,TP,1608	
.....6 C120	2203-000491	C-CERAMIC,CHIP;2.2nF,10%,50V,X7R,TP,1608	
.....6 C120	2203-000491	C-CERAMIC,CHIP;2.2nF,10%,50V,X7R,TP,1608	
.....6 C120	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
.....6 C120	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
.....6 C120	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
.....6 C120	2203-000575	C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP,2012	
.....6 C120	2203-000626	C-CERAMIC,CHIP;0.022NF,5%,50V,C0G,TP,160	
.....6 C120	2203-000626	C-CERAMIC,CHIP;0.022NF,5%,50V,C0G,TP,160	
.....6 C120	2203-000681	C-CERAMIC,CHIP;0.027NF,5%,50V,C0G,TP,160	
.....6 C120	2203-000681	C-CERAMIC,CHIP;0.027NF,5%,50V,C0G,TP,160	
.....6 C120	2203-000681	C-CERAMIC,CHIP;0.027NF,5%,50V,C0G,TP,160	
.....6 C120	2203-000783	C-CERAMIC,CHIP;0.33NF,5%,50V,C0G,TP,1608	
.....6 C120	2203-000783	C-CERAMIC,CHIP;0.33NF,5%,50V,C0G,TP,1608	
.....6 C120	2203-000783	C-CERAMIC,CHIP;0.33NF,5%,50V,C0G,TP,1608	
.....6 C120	2203-000783	C-CERAMIC,CHIP;0.33NF,5%,50V,C0G,TP,1608	
.....6 C120	2203-000783	C-CERAMIC,CHIP;0.33NF,5%,50V,C0G,TP,1608	
.....6 C120	2203-000896	C-CERAMIC,CHIP;4.7nF,10%,50V,X7R,TP,1608	
.....6 C120	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....6 C120	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....6 C120	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....6 C120	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....6 C120	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....6 C120	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....6 C120	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....6 C120	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....6 C120	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....6 C120	2203-000975	C-CERAMIC,CHIP;47nF,10%,25V,X7R,TP,1608,	
.....6 C120	2203-000998	C-CERAMIC,CHIP;0.047NF,5%,50V,C0G,TP,160	
.....6 C120	2203-000998	C-CERAMIC,CHIP;0.047NF,5%,50V,C0G,TP,160	
.....6 C120	2203-000998	C-CERAMIC,CHIP;0.047NF,5%,50V,C0G,TP,160	
.....6 C120	2203-000998	C-CERAMIC,CHIP;0.047NF,5%,50V,C0G,TP,160	
.....6 C120	2203-001140	C-CERAMIC,CHIP;68nF,10%,16V,X7R,TP,1608,	
.....6 C120	2203-001222	C-CERAMIC,CHIP;820pF,10%,50V,X7R,TP,1608	
.....6 C120	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.....6 C120	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.....6 C120	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.....6 C120	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.....6 C120	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.....6 C120	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.....6 C120	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.....6 C120	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.....6 C120	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.....6 C120	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.....6 C120	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.....6 C120	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.....6 C120	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.....6 C120	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.....6 C120	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.....6 C120	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.....6 C120	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.....6 C120	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.....6 C120	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.....6 C120	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.....6 C120	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.....6 C120	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.....6 C120	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.....6 C120	2203-002494	C-CERAMIC,CHIP;470nF,10%,16V,X7R,TP,2012	
.....6 C120	2203-005384	C-CERAMIC,CHIP;4700nF,+80-20%,10V,Y5V,TP	
.....6 C120	2203-005384	C-CERAMIC,CHIP;4700nF,+80-20%,10V,Y5V,TP	
.....6 C120	2203-005384	C-CERAMIC,CHIP;4700nF,+80-20%,10V,Y5V,TP	
.....6 C120	2203-005809	C-CERAMIC,CHIP;1000nF,10%,16V,X7R,TP,201	
.....6 FC09	2402-000170	C-AL,SMD;1uF,20%,50V,GP,TP,4.3x4.3x5.4,	
.....6 PC18	2402-000173	C-AL,SMD;4.7uF,20%,35V,GP,TP,4.3x4.3x5.	
.....6 FC60	2402-000173	C-AL,SMD;4.7uF,20%,35V,GP,TP,4.3x4.3x5.	

Loc. No.	Code No.	Description ; Specification	Remark
.....6 FC29	2402-000173	C-AL,SMD;4.7uF,20%,35V,GP,TP,4.3x4.3x5.	
.....6 FC13	2402-000173	C-AL,SMD;4.7uF,20%,35V,GP,TP,4.3x4.3x5.	
.....6 SC38	2402-000179	C-AL,SMD;47uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....6 SC36	2402-000179	C-AL,SMD;47uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....6 SC34	2402-000179	C-AL,SMD;47uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....6 SC40	2402-000179	C-AL,SMD;47uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....6 SC42	2402-000179	C-AL,SMD;47uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....6 SC44	2402-000179	C-AL,SMD;47uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....6 SC47	2402-000179	C-AL,SMD;47uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....6 SC31	2402-000179	C-AL,SMD;47uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....6 PC01	2402-000179	C-AL,SMD;47uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....6 PC03	2402-000179	C-AL,SMD;47uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....6 PC06	2402-000179	C-AL,SMD;47uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....6 PC32	2402-000179	C-AL,SMD;47uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....6 SC18	2402-000179	C-AL,SMD;47uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....6 SC16	2402-000179	C-AL,SMD;47uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....6 SC11	2402-000179	C-AL,SMD;47uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....6 FC63	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....6 FC62	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....6 FC45	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....6 FC12	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....6 FC04	2402-001042	C-AL,SMD;100uF,20%,16V,GP,TP,6.6x6.6x5.4	
.....6 PC12	2402-001049	C-AL,CHIP;10uF,20%,16V,GP,TP,3.3x3.3x5.4	
.....6 PC10	2402-001049	C-AL,CHIP;10uF,20%,16V,GP,TP,3.3x3.3x5.4	
.....6 PC09	2402-001049	C-AL,CHIP;10uF,20%,16V,GP,TP,3.3x3.3x5.4	
.....6 FC65	2402-001049	C-AL,CHIP;10uF,20%,16V,GP,TP,3.3x3.3x5.4	
.....6 FC06	2402-001049	C-AL,CHIP;10uF,20%,16V,GP,TP,3.3x3.3x5.4	
.....6 PC08	2402-001070	C-AL,SMD;470uF,20%,16V,GP,TP,10x10.2,-	
.....6 PC07	2402-001070	C-AL,SMD;470uF,20%,16V,GP,TP,10x10.2,-	
.....6 FC31	2402-001070	C-AL,SMD;470uF,20%,16V,GP,TP,10x10.2,-	
.....6 CC49	2402-001070	C-AL,SMD;470uF,20%,16V,GP,TP,10x10.2,-	
.....6 EL05	2703-000274	INDUCTOR-SMD;2.2uH,10%,1.25x2x0.85mm	
.....6 EL06	2703-000274	INDUCTOR-SMD;2.2uH,10%,1.25x2x0.85mm	
.....6 EL07	2703-000274	INDUCTOR-SMD;2.2uH,10%,1.25x2x0.85mm	
.....6 EL08	2703-000274	INDUCTOR-SMD;2.2uH,10%,1.25x2x0.85mm	
.....6 EL01	2703-000274	INDUCTOR-SMD;2.2uH,10%,1.25x2x0.85mm	
.....6 EL02	2703-000274	INDUCTOR-SMD;2.2uH,10%,1.25x2x0.85mm	
.....6 EL03	2703-000274	INDUCTOR-SMD;2.2uH,10%,1.25x2x0.85mm	
.....6 EL04	2703-000274	INDUCTOR-SMD;2.2uH,10%,1.25x2x0.85mm	
.....6 FL01	2703-001070	INDUCTOR-SMD;100uH,10%,4.5x3.2x3.2mm	
.....6 G101	3301-001082	CORE-FERRITE BEAD;AB,60OHM,3.2X2.5X1.3MM	
.....6 G101	3301-001186	CORE-FERRITE BEAD;AB,600ohm,3.2x1.6x1.3m	
.....6 G101	3301-001186	CORE-FERRITE BEAD;AB,600ohm,3.2x1.6x1.3m	
.....6 G101	3301-001186	CORE-FERRITE BEAD;AB,600ohm,3.2x1.6x1.3m	
.....6 G101	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.....6 G101	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.....6 G101	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.....6 G101	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.....6 G101	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.....6 G101	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.....6 G101	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.....6 G101	3301-001324	CORE-FERRITE BEAD;AB,15OHM,2X1.25X0.9MM,	
.....6 CR27	2007-000033	R-CHIP;0ohm,5%,1/4W,TP,3216	
.....6 0	AA41-00610E	PCB;HCM4215W,PCB,4L,E,1.6,162*223,140*10	S.N.A
.....6	0202-001167	SOLDER-CREAM;RX3603-2330HO,S45A,PASTE,SN	S.N.A
....4 T0093	BP95-00146C	ASSY SUB PCB-CONV MOD;,P55A,CG MOD	
.....5	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
.....5 L01	2701-001030	INDUCTOR-AXIAL;43uH,10%,5x14mm	
.....5 CN01	3703-001124	CONNECTOR-BACK PANEL;32P,2R,MALE,ANGLE,A	
.....5 CN906	3711-003601	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,ANGLE,	
.....5	BP97-00513D	ASSY SMD;,P55A,CG MOD	S.N.A
.....6 D13	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....6 D12	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....6 D11	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....6 D10	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....6 D14	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....6 D15	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....6 D16	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....6 D17	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....6 D18	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....6 D01	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....6 D02	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....6 D03	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....6 D04	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....6 D05	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....6 D09	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	

Loc. No.	Code No.	Description ; Specification	Remark
.....6 D08	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....6 D07	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....6 D06	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
.....6 DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
.....6 DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
.....6 DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
.....6 Q02	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.....6 Q03	0501-000280	TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23	
.....6 Q10	0501-000342	TR-SMALL SIGNAL;KSC1623-Y,NPN,200mW,SOT-	
.....6 Q04	0501-000342	TR-SMALL SIGNAL;KSC1623-Y,NPN,200mW,SOT-	
.....6 Q409	0505-000110	FET-SILICON;2N7002,N,60V,115MA,7.5OHM,0.	
.....6 Q409	0505-000110	FET-SILICON;2N7002,N,60V,115MA,7.5OHM,0.	
.....6 Q409	0505-000110	FET-SILICON;2N7002,N,60V,115MA,7.5OHM,0.	
.....6 IC104	0801-002345	IC-CMOS LOGIC;7S04,INVERTER,SOT-353,5P,4	
.....6 IC104	0801-002345	IC-CMOS LOGIC;7S04,INVERTER,SOT-353,5P,4	
.....6 IC104	0801-002345	IC-CMOS LOGIC;7S04,INVERTER,SOT-353,5P,4	
.....6 IC08	1001-000164	IC-ANALOG MULTIPLEX;74HC4052,CMOS,SOP,16	
.....6 IC13	1001-001155	IC-ANALOG MULTIPLEX;NC7SB3157P6X,CMOS,SC	
.....6 IC112	1103-001195	IC-EEPROM;24C64,8Kx8Bit,SOP,8P,150MIL,10	
.....6 DU410	1201-001135	IC-OP AMP;324,SOP,ST,14P,150MIL,QUAD,100	
.....6 DU410	1201-001504	IC-OP AMP;072,SOP,8P,150MIL,DUAL,-,PLAST	
.....6 DU410	1201-001504	IC-OP AMP;072,SOP,8P,150MIL,DUAL,-,PLAST	
.....6 DU410	1201-001504	IC-OP AMP;072,SOP,8P,150MIL,DUAL,-,PLAST	
.....6 DU410	1201-001504	IC-OP AMP;072,SOP,8P,150MIL,DUAL,-,PLAST	
.....6 T0074	1201-001520	IC-VIDEO AMP;EL2250CS,SOIC,8P,150MIL,DUA	
.....6 IC03	1203-001824	IC-VOL. DETECTOR;7042,SOT-89,3P,-,PLASTI	
.....6 T0087	1203-002302	IC-POSI.FIXED REG.;78RM33D,D-PAK,3P,-,PL	
.....6 IC17	1209-001163	IC-PLL;TLC2932IPWLE,SOP,14P,-,PLASTIC	
.....6 R36	2007-000028	R-CHIP;39ohm,5%,1/8W,TP,2012	
.....6 R35	2007-000028	R-CHIP;39ohm,5%,1/8W,TP,2012	
.....6 R31	2007-000028	R-CHIP;39ohm,5%,1/8W,TP,2012	
.....6 R30	2007-000028	R-CHIP;39ohm,5%,1/8W,TP,2012	
.....6 R143	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 R144	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 R25	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 R122	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 R123	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 R141	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 R136	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....6 R15	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....6 R24	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....6 R45	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....6 R46	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....6 R09	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....6 R10	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....6 R129	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....6 R134	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....6 R135	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
.....6 R59	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R65	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R71	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R77	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R91	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R53	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R02	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R16	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R17	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R20	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R47	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R62	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R64	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R68	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R58	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R56	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R52	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R70	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R98	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R94	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R82	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R80	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R76	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R74	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R38	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R37	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R110	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R11	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R101	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	

Loc. No.	Code No.	Description ; Specification	Remark
.....6 R03	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R39	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R50	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R44	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R43	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R42	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R41	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R40	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R128	2007-000079	R-CHIP;1.8Kohm,5%,1/10W,TP,1608	
.....6 R81	2007-000080	R-CHIP;2Kohm,5%,1/10W,TP,1608	
.....6 R75	2007-000080	R-CHIP;2Kohm,5%,1/10W,TP,1608	
.....6 R69	2007-000080	R-CHIP;2Kohm,5%,1/10W,TP,1608	
.....6 R51	2007-000080	R-CHIP;2Kohm,5%,1/10W,TP,1608	
.....6 R57	2007-000080	R-CHIP;2Kohm,5%,1/10W,TP,1608	
.....6 R63	2007-000080	R-CHIP;2Kohm,5%,1/10W,TP,1608	
.....6 R109	2007-000082	R-CHIP;3.3Kohm,5%,1/10W,TP,1608	
.....6 R66	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6 R61	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6 R60	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6 R55	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6 R54	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6 R79	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6 R78	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6 R73	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6 R72	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6 R67	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6 R49	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6 R08	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6 R07	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6 R06	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6 R04	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6 R01	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6 R48	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6 R133	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6 R121	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6 R119	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6 R118	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6 R86	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....6 R92	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....6 R93	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....6 R96	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....6 R97	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....6 R85	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....6 R113	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....6 R114	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....6 R115	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....6 R83	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....6 R84	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....6 R125	2007-000091	R-CHIP;12Kohm,5%,1/10W,TP,1608	
.....6 R05	2007-000102	R-CHIP;100Kohm,5%,1/10W,TP,1608	
.....6 R127	2007-000109	R-CHIP;1Mohm,5%,1/10W,TP,1608	
.....6 R100	2007-000118	R-CHIP;390ohm,5%,1/10W,TP,1608	
.....6 R32	2007-000119	R-CHIP;560ohm,5%,1/10W,TP,1608	
.....6 R34	2007-000122	R-CHIP;1.2Kohm,5%,1/10W,TP,1608	
.....6 R29	2007-000122	R-CHIP;1.2Kohm,5%,1/10W,TP,1608	
.....6 R28	2007-000122	R-CHIP;1.2Kohm,5%,1/10W,TP,1608	
.....6 R117	2007-000122	R-CHIP;1.2Kohm,5%,1/10W,TP,1608	
.....6 R107	2007-000122	R-CHIP;1.2Kohm,5%,1/10W,TP,1608	
.....6 R33	2007-000124	R-CHIP;2.2Kohm,5%,1/10W,TP,1608	
.....6 R120	2007-000124	R-CHIP;2.2Kohm,5%,1/10W,TP,1608	
.....6 R90	2007-000133	R-CHIP;330Kohm,5%,1/10W,TP,1608	
.....6 R89	2007-000133	R-CHIP;330Kohm,5%,1/10W,TP,1608	
.....6 R88	2007-000133	R-CHIP;330Kohm,5%,1/10W,TP,1608	
.....6 R87	2007-000133	R-CHIP;330Kohm,5%,1/10W,TP,1608	
.....6 R108	2007-000381	R-CHIP;13Kohm,5%,1/10W,TP,1608	
.....6 R139	2007-000402	R-CHIP;150ohm,5%,1/10W,TP,1608	
.....6 R138	2007-000402	R-CHIP;150ohm,5%,1/10W,TP,1608	
.....6 R137	2007-000402	R-CHIP;150ohm,5%,1/10W,TP,1608	
.....6 R99	2007-000704	R-CHIP;3.6Kohm,5%,1/16W,DA,TP,1608	
.....6 R95	2007-000704	R-CHIP;3.6Kohm,5%,1/16W,DA,TP,1608	
.....6 R126	2007-000857	R-CHIP;4.3Kohm,1%,1/16W,DA,TP,1608	
.....6 R27	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 R26	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 R116	2007-001179	R-CHIP;8.2Kohm,5%,1/10W,TP,1608	
.....6 RN04	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....6 RN05	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....6 RN06	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	

Loc. No.	Code No.	Description ; Specification	Remark
.....6 RN01	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....6 RN02	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....6 RN03	2011-000585	R-NETWORK;47OHM,5%,1/16W,L,CHIP,8P,TP	
.....6 C120	2203-000041	C-CERAMIC,CHIP;0.01NF,0.25PF,50V,C0G,TP,

Loc. No.	Code No.	Description ; Specification	Remark
.....5 R682	2001-001146	R-CARBON(S);4.7OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R681	2001-001146	R-CARBON(S);4.7OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R811	2001-001182	R-CARBON(S);7.5KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R814	2003-001098	R-METAL OXIDE(S);22Kohm,5%,3W,AA,TP,6x16	
.....5 R805	2004-000970	R-METAL;470ohm,1%,1/4W,AA,TP,2.4x6.4mm	
.....5 R024	2004-001390	R-METAL(S);1Kohm,2%,1/2W,AA,TP,2.4x6.4mm	
.....5 R024	2004-001390	R-METAL(S);1Kohm,2%,1/2W,AA,TP,2.4x6.4mm	
.....5 R024	2004-001970	R-METAL(S);1.8Kohm,1%,1/2W,AA,TP,6.5x2.5	
.....5 R024	2004-001970	R-METAL(S);1.8Kohm,1%,1/2W,AA,TP,6.5x2.5	
.....5 R024	2004-001970	R-METAL(S);1.8Kohm,1%,1/2W,AA,TP,6.5x2.5	
.....5 R024	2004-001970	R-METAL(S);1.8Kohm,1%,1/2W,AA,TP,6.5x2.5	
.....5 C695	2301-000192	C-FILM,PEF;1nF,5%,50V,TP,5.3x10mm,5mm	
.....5 C694	2301-000192	C-FILM,PEF;1nF,5%,50V,TP,5.3x10mm,5mm	
.....5 C689	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
.....5 C687	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
.....5 C682	2305-000665	C-FILM,MPEF;100nF,5%,63V,TP,7.5x4.0x5.0m	
.....5 C701	2401-000025	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
.....5 C701	2401-000025	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
.....5 C701	2401-000025	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
.....5 C701	2401-000025	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
.....5 C701	2401-000039	C-AL;1000uF,20%,16V,GP,TP,10x16,5	
.....5 C701	2401-000039	C-AL;1000uF,20%,16V,GP,TP,10x16,5	
.....5 C701	2401-000192	C-AL;1000uF,20%,50V,GP,TP,16x25,7.5	
.....5 C701	2401-000192	C-AL;1000uF,20%,50V,GP,TP,16x25,7.5	
.....5 C701	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
.....5 C701	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
.....5 C701	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
.....5 C701	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
.....5 C701	2401-000471	C-AL;10uF,20%,50V,BP,TP,5x11,5mm	
.....5 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000603	C-AL;1UF,20%,50V,GP,TP,5X11,2	
.....5 C701	2401-000603	C-AL;1UF,20%,50V,GP,TP,5X11,2	
.....5 C701	2401-000603	C-AL;1UF,20%,50V,GP,TP,5X11,2	
.....5 C701	2401-000603	C-AL;1UF,20%,50V,GP,TP,5X11,2	
.....5 C701	2401-000603	C-AL;1UF,20%,50V,GP,TP,5X11,2	
.....5 C701	2401-000832	C-AL;220uF,20%,25V,GP,TP,8x11.5,5	
.....5 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-001192	C-AL;33uF,20%,50V,GP,TP,6.3x11,5	
.....5 C701	2401-001397	C-AL;470uF,20%,25V,GP,TP,10x16,5	
.....5 C701	2401-001513	C-AL;47uF,20%,16V,WT,TP,5x11,5	
.....5 C701	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
.....5 C701	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
.....5 C701	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
.....5 C701	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
.....5 C701	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
.....5 C701	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
.....5 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 C701	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
.....5 C701	2401-002300	C-AL;47uF,20%,50V,GP,TP,6.3x11,5	
.....5 C701	2401-002300	C-AL;47uF,20%,50V,GP,TP,6.3x11,5	
.....5 C701	2401-002459	C-AL;220uF,20%,25V,LZ,TP,10x16,5	
.....5 C701	2401-002459	C-AL;220uF,20%,25V,LZ,TP,10x16,5	
.....5 C701	2401-002459	C-AL;220uF,20%,25V,LZ,TP,10x16,5	
.....5 C701	2401-002459	C-AL;220uF,20%,25V,LZ,TP,10x16,5	
.....5 C701	2401-002459	C-AL;220uF,20%,25V,LZ,TP,10x16,5	
.....5 C701	2401-002459	C-AL;220uF,20%,25V,LZ,TP,10x16,5	
.....5 C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
.....5 C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
.....5 C701	2401-002594	C-AL;220uF,20%,16V,GP,TP,8x11.5,5	
.....5 C701	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
.....5 C701	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
.....5 C701	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
.....5 C701	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
.....5 C701	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
.....5 L105	2701-000106	INDUCTOR-AXIAL;1.5uH,10%,3x7mm	
.....5 L119	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
.....5 L120	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
.....5 L121	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
.....5 L122	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
.....5 L123	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
.....5 L124	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
.....5 L107	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
.....5 L108	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
.....5 L111	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
.....5 L114	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
.....5 L113	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
.....5 L112	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
.....5 L703	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
.....5 L106	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
.....5 L104	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
.....5 L103	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
.....5 L101	2701-000115	INDUCTOR-AXIAL;10uH,10%,3x7mm	
.....5 L706	2701-001030	INDUCTOR-AXIAL;43uH,10%,5x14mm	
.....5 L705	2701-001030	INDUCTOR-AXIAL;43uH,10%,5x14mm	
.....5 L102	2701-001040	INDUCTOR-AXIAL;10uH,10%,4.5x14mm	
.....5 G101	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
.....5 G101	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
.....5 G101	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
.....5 CN906	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
.....5 CN906	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
.....5 CN906	3711-002643	CONNECTOR-HEADER;BOX,4P,1R,2.5mm,STRAIGH	
.....5 CN906	3711-002645	CONNECTOR-HEADER;BOX,6P,1R,2.5mm,STRAIGH	
.....5 GT01	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT02	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT03	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5	BP97-00513Q	ASSY SMD;HCN4226WX/XAA,P55A	S.N.A
.....6 DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
.....6 DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
.....6 DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
.....6 DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
.....6 DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
.....6 DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
.....6 DZ016	0403-000314	DIODE-ZENER;RLZJ9.1B,8.80-9.30V,500MW,LL	
.....6 DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
.....6 DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
.....6 DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
.....6 DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
.....6 DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
.....6 DZ016	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
.....6 DZ016	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
.....6 DZ016	0403-001117	DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP	
.....6 Q703	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....6 Q704	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....6 Q707	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....6 Q708	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....6 Q709	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....6 Q710	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....6 Q101	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....6 Q103	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....6 Q106	0501-000344	TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT-	
.....6 IC106	1001-001177	IC-VIDEO SWITCH;TEA6425D,VIDEO SWITCH ,S	
.....6 IC106	1001-001177	IC-VIDEO SWITCH;TEA6425D,VIDEO SWITCH ,S	
.....6 IC605	1001-001178	IC-AUDIO SWITCH;TEA6422D,AUDIO SWITCH ,S	
.....6 IC704	1002-001048	IC-A/D&D/A CONVERTER;PCF8591T,8BIT,SOP,1	

Loc. No.	Code No.	Description ; Specification	Remark
.....6 IC705	1002-001048	IC-A/D&D/A CONVERTER;PCF8591T,8BIT,SOP,1	
.....6 DU410	1201-000541	IC-OP AMP;062,SOP,8P,153MIL,DUAL,6V/mV,P	
.....6 IC602	1204-002002	IC-SOUND PROCESSOR;MSP3420G-B11,PQFP,80P	
.....6 R789	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 R788	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 R777	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 R776	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 R775	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 R791	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 R97C	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 R904	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 R79B	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 R795	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 R794	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 R729	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 R145	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 R143	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 R117	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 R101	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 R712	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 R708	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 R706	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 R148	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
.....6 R646	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R647	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R703	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R627	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R626	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R625	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R624	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R707	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R773	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R772	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R757	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R756	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R724	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R722	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R709	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R602	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R115	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R114	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R113	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R108	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R107	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R103	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R102	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R116	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R601	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R172	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R171	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R170	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R127	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R126	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R125	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	
.....6 R730	2007-000076	R-CHIP;330ohm,5%,1/10W,TP,1608	
.....6 R166	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
.....6 R150	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
.....6 R157	2007-000077	R-CHIP;470ohm,5%,1/10W,TP,1608	
.....6 R652	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R651	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R643	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R642	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R641	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R653	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R798	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R797	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R793	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R728	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R637	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R630	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R629	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R628	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R603	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R106	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R631	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R636	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R635	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R634	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R633	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R632	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
.....6 R755	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6 R771	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6 R774	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6 R780	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6 R604	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6 R611	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6 R688	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6 R750	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
.....6 R749	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....6 R748	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....6 R747	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....6 R746	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
.....6 R744	2007-000093	R-CHIP;20Kohm,5%,1/10W,TP,1608	
.....6 R743	2007-000093	R-CHIP;20Kohm,5%,1/10W,TP,1608	
.....6 R741	2007-000093	R-CHIP;20Kohm,5%,1/10W,TP,1608	
.....6 R739	2007-000093	R-CHIP;20Kohm,5%,1/10W,TP,1608	
.....6 R164	2007-000094	R-CHIP;22Kohm,5%,1/10W,TP,1608	
.....6 R165	2007-000094	R-CHIP;22Kohm,5%,1/10W,TP,1608	
.....6 R149	2007-000094	R-CHIP;22Kohm,5%,1/10W,TP,1608	
.....6 R151	2007-000094	R-CHIP;22Kohm,5%,1/10W,TP,1608	
.....6 R155	2007-000094	R-CHIP;22Kohm,5%,1/10W,TP,1608	
.....6 R156	2007-000094	R-CHIP;22Kohm,5%,1/10W,TP,1608	
.....6 R716	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	
.....6 R704	2007-000097	R-CHIP;47Kohm,5%,1/10W,TP,1608	
.....6 R110	2007-000098	R-CHIP;56Kohm,5%,1/10W,TP,1608	
.....6 R105	2007-000098	R-CHIP;56Kohm,5%,1/10W,TP,1608	
.....6 R762	2007-000127	R-CHIP;9.1Kohm,5%,1/10W,TP,1608	
.....6 R745	2007-000127	R-CHIP;9.1Kohm,5%,1/10W,TP,1608	
.....6 R742	2007-000127	R-CHIP;9.1Kohm,5%,1/10W,TP,1608	
.....6 R740	2007-000127	R-CHIP;9.1Kohm,5%,1/10W,TP,1608	
.....6 R738	2007-000127	R-CHIP;9.1Kohm,5%,1/10W,TP,1608	
.....6 R612	2007-000134	R-CHIP;33Kohm,5%,1/10W,TP,1608	
.....6 R607	2007-000134	R-CHIP;33Kohm,5%,1/10W,TP,1608	
.....6 R609	2007-000329	R-CHIP;11Kohm,5%,1/10W,TP,1608	
.....6 R608	2007-000329	R-CHIP;11Kohm,5%,1/10W,TP,1608	
.....6 R109	2007-000828	R-CHIP;39Kohm,1%,1/16W,DA,TP,1608	
.....6 R104	2007-000828	R-CHIP;39Kohm,1%,1/16W,DA,TP,1608	
.....6 R767	2007-001010	R-CHIP;51Kohm,5%,1/10W,TP,1608	
.....6 R754	2007-001010	R-CHIP;51Kohm,5%,1/10W,TP,1608	
.....6 R753	2007-001010	R-CHIP;51Kohm,5%,1/10W,TP,1608	
.....6 R752	2007-001010	R-CHIP;51Kohm,5%,1/10W,TP,1608	
.....6 R605	2007-001010	R-CHIP;51Kohm,5%,1/10W,TP,1608	
.....6 R610	2007-001010	R-CHIP;51Kohm,5%,1/10W,TP,1608	
.....6 R751	2007-001010	R-CHIP;51Kohm,5%,1/10W,TP,1608	
.....6 R713	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 R710	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 R702	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 R701	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 R174	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 R173	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 R714	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 R799	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 R792	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 R731	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 R727	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 R726	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 R725	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 R133	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 R132	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 R121	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 R120	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 R119	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 R118	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 R134	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 R142	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 R140	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 R138	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 R137	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
.....6 R613	2007-001179	R-CHIP;8.2Kohm,5%,1/10W,TP,1608	
.....6 R606	2007-001179	R-CHIP;8.2Kohm,5%,1/10W,TP,1608	
.....6 C120	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
.....6 C120	2203-000140	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,1608	
.....6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	

Loc. No.	Code No.	Description ; Specification	Remark
.....6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V,TP,	
.....6 C120	2203-000206	C-CERAMIC,CHIP;100nF,10%,50V,X7R,TP,2012

Loc. No.	Code No.	Description ; Specification	Remark
....4 Q433	AA96-00243H	ASSY H/S;-,POWER,AA62-00045A,KSD73Y,C17A	S.N.A
.....5	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
.....5 T0090	0502-000298	TR-POWER;KSD73,NPN,30000mW,TO-220,TP,120	
.....5 T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
.....5	AA62-00045A	HEAT SINK-PS;-,-,T1.0,-,-,DREAM,-,-,-,-,	S.N.A
⚠ 4 IC831S	AA96-00275J	ASSY H/S;SCREW,SILICON-OIL,AA62-00051A,S	S.N.A
.....5 CIS	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
.....5 T0081	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
.....5 IC063	AA13-00105A	IC HYBRID;STR-X6456,7,-20TO+125,DIP,21A,	
.....5 CIS	AA62-00051A	HEAT SINK-PS;-,-,-,SILVER,HOLE 31mm,ALL,	S.N.A
⚠ 4 D811S	AA96-00276A	ASSY H/S;-,BRIDGE,AA62-00052A,RBV606,WAS	S.N.A
.....5	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
.....5 T0083	0402-000549	DIODE-BRIDGE;RBV606,600V,6A,-,BK	
.....5 T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
.....5	AA60-30003A	WASHER;T1.5,SBHG-1	S.N.A
.....5	AA62-00052A	HEAT SINK-PS;-,-,-,SILVER,HOLE 18.5mm, 2	S.N.A
⚠ 4 IC421	AA96-00475B	ASSY H/S;SILICON-OIL,FMLG-12S(4),AA62-00	S.N.A
.....5	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
.....5 T0083	0402-000233	DIODE-RECTIFIER;FML-G12S,200V,5A,-,-	
.....5 IC012	1203-000165	IC-POSI.ADJUST REG.;78R12,TO-220,4P,-,PL	
.....5 T0081	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
.....5	AA62-00066B	HEAT SINK;D2,D3,AL ,T1.0,89,70,-,AA62-00	S.N.A
....4 IC301	AA96-00623A	ASSY H/S;-,POWER,AA62-00056A,LA7845	S.N.A
.....5	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
.....5 T0088	1204-000517	IC-VERTICAL DEF.;LA7845,SIP,7P,-,PLASTIC	
.....5 T0081	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
.....5	AA62-00056A	HEAT SINK-PS;-,-,T1.0,-,41*35*70,D2,-,-,	S.N.A
....4 Q431	BH99-00033H	ASSY HEAT/SINK;BH62-00038A,SPRING,FJL692	S.N.A
.....5 T0083	0402-001296	DIODE-RECTIFIER;FMP-3FU,1.5KV,5A,TO-3PF,	
.....5 T0060	BH61-70003A	SPRING ETC;CVT4857,STS304-W1/2H,W3.8,-,L	S.N.A
.....5 T0090	0502-001230	TR-POWER;FJL6920YDTU,N,200000MW,TO-264 F	
.....5 CIS	BH62-00038B	HEAT SINK-FBT;COMMANDO,A1050S,T2.0,85*80	S.N.A
.....5 CIS	BH73-00028A	SILICON/RUBBER-HS;CDT ALL,SILICON,26*33*	S.N.A
.....5 CIS	0205-001027	OIL-SILICON;G746,-,-	S.N.A
⚠ 4 TS801S	BP26-00001A	TRANS SWITCHING-POWER;19B012,P55A,HCM421	
⚠ 4 T801S	BP26-00002A	TRANS SWITCHING;EER5345,P55A,160V~280V,P	
....4 T0076	BP39-00014A	LEAD CONNECTOR-ASSY;P55A/HCM4215W,UL1007	
....4	BP39-00017B	LEAD CONNECTOR;HCM4727,UL1617#22,UL/CSA,	S.N.A
.....5 T0121	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
....4	BP97-00289A	ASSY AUTO;0	S.N.A
.....5 D477	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.....5 D478	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.....5 D479	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
⚠ 5 DR401S	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
⚠ 5 DR402S	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.....5 D301	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.....5 D385	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.....5 D436	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.....5 D442	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.....5 D443	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
.....5 DS804	0401-000006	DIODE-SWITCHING;BAV21,250V,250mA,DO-35,T	
.....5 DS802	0401-000006	DIODE-SWITCHING;BAV21,250V,250mA,DO-35,T	
.....5 T0083	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
.....5 T0083	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
.....5 T0083	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
.....5 T0083	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
.....5 T0083	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
.....5 T0083	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41,TP	
.....5 T0083	0402-000254	DIODE-RECTIFIER;RGP10J,600V,1A,DO-41,TP	
.....5 T0083	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
.....5 T0083	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
.....5 T0083	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
.....5 T0083	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.2A,DO-201,T	
.....5 T0083	0402-000537	DIODE-RECTIFIER;RH1A,600V,0.6A,DO-204AC	
.....5 T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
.....5 T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
.....5 T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
.....5 T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
.....5 T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
.....5 T0083	0402-001286	DIODE-RECTIFIER;RP1H,2000V,.1A,-,TP	
.....5 DZ016	0403-000704	DIODE-ZENER;TZP7.5B,7.5V,7.5-8.4V,1W,DO-	
.....5 DZ016	0403-000716	DIODE-ZENER;MTZJ4.7B,4.7V,4.55-4.8V,500m	
.....5 DZ016	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
.....5 DZ016	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
.....5 DZ016	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
.....5 DZ016	0403-000734	DIODE-ZENER;TZP15B,15V,14.7-16.5V,1W,DO-	
.....5 DZ016	0403-001167	DIODE-ZENER;MTZJ30D,30V,29.02-30.51V,500	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 DZ016	0403-001316	DIODE-ZENER;MTZJ3.0A,2.85-3.07V,500mW,DO	
.....5 DZ016	0403-001319	DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	
.....5 DZ016	0403-001319	DIODE-ZENER;MTZJ4.7C,4.68-4.93V,500mW,DO	
.....5 DZ016	0403-001325	DIODE-ZENER;MTZJ15C,14.35-15.09V,500mW,D	
.....5 DZ016	0403-001325	DIODE-ZENER;MTZJ15C,14.35-15.09V,500mW,D	
.....5 DZ016	0403-001325	DIODE-ZENER;MTZJ15C,14.35-15.09V,500mW,D	
.....5 DZ016	0403-001327	DIODE-ZENER;MTZJ18A,16.22-17.06V,500mW,D	
.....5 DZ016	0403-001327	DIODE-ZENER;MTZJ18A,16.22-17.06V,500mW,D	
.....5 DZ016	0403-001327	DIODE-ZENER;MTZJ18A,16.22-17.06V,500mW,D	
.....5 DZ016	0403-001328	DIODE-ZENER;MTZJ22A,20.15-21.20V,500mW,D	
.....5 DZ016	0403-001329	DIODE-ZENER;MTZJ24B,22.61-23.77V,500mW,D	
.....5 DZ016	0403-001329	DIODE-ZENER;MTZJ24B,22.61-23.77V,500mW,D	
.....5 DZ016	0403-001330	DIODE-ZENER;MTZJ30A,26.99-28.39V,500mW,D	
.....5 DZ016	0403-001330	DIODE-ZENER;MTZJ30A,26.99-28.39V,500mW,D	
.....5 DS805	0404-001056	DIODE-SCHOTTKY;RK16,60V,1.5A,DO-204AC,TP	
⚠ 5 QR401S	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
.....5 Q482	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
.....5 Q432	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
.....5 Q461	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q471	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q474	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q481	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q851	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 QS801	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 QS802	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q301	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q381	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q382	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q401	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q402	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q421	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 Q451	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
.....5 IC012	1203-001217	IC-POSI.ADJUST REG.;431,TO-92,3P,4.58MIL	
⚠ 5 VP801S	1405-000152	VARISTOR;560V,2500A,14x8.5mm,TP	
.....5 R125	2001-000005	R-CARBON;390ohm,5%,1/8W,AA,TP,1.8x3.2mm	
.....5 R125	2001-000006	R-CARBON;2.4KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R308	2001-000016	R-CARBON(S);1OHM,5%,1/2W,AA,TP,2.4X6.4MM	
.....5 R470	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R422	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R836	2001-000052	R-CARBON(S);3.3KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R493	2001-000052	R-CARBON(S);3.3KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 RS808	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 RS804	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R855	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 RS803	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R814	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R813	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R812	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R811	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R439	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R438	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R834	2001-000109	R-CARBON(S);470OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R125	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000262	R-CARBON;1.8MOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000508	R-CARBON;220KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000554	R-CARBON;270OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000745	R-CARBON;4.7OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000761	R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000761	R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000761	R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000761	R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000761	R-CARBON;430OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000800	R-CARBON;5.1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000800	R-CARBON;5.1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000812	R-CARBON;5.6KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 R125	2001-001031	R-CARBON;91KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
.....5 RS807	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
⚠ 5 RR401S	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
.....5 R854	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
.....5 R839	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
.....5 R413	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
.....5 R434	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
.....5 R837	2001-001108	R-CARBON(S);22KOHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R468	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 RS802	2001-001124	R-CARBON(S);3.9OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R431	2001-001153	R-CARBON(S);47OHM,5%,1/2W,AA,TP,2.4X6.4M	
.....5 R433	2001-001155	R-CARBON(S);5.6KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R410	2001-001155	R-CARBON(S);5.6KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 RS806	2001-001168	R-CARBON(S);6.8KOHM,5%,1/2W,AA,TP,2.4X6.	
.....5 R459	2001-001192	R-CARBON(S);820OHM,5%,1/2W,AA,TP,2.4X6.4	
.....5 R851	2001-001196	R-CARBON(S);9.1KOHM,5%,1/2W,AA,TP,2.4X6.	
⚠ 5 RP801S	2002-001010	R-COMPOSITION;1.8Mohm,5%,1/2W,AA,TP,3.7x	
⚠ 5 RY801S	2002-001013	R-COMPOSITION;4.7Mohm,5%,1/2W,AA,TP,3.7x	
.....5 R428	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
.....5 R428A	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
.....5 R425	2003-000417	R-METAL OXIDE(S);1.2Kohm,5%,3W,AA,TP,6x1	
.....5 R831	2003-000512	R-METAL OXIDE(S);15Kohm,5%,3W,AA,TP,6x16	
.....5 R832	2003-000512	R-METAL OXIDE(S);15Kohm,5%,3W,AA,TP,6x16	
.....5 R430	2003-000586	R-METAL OXIDE(S);22Kohm,5%,2W,AF,TP,4x12	
.....5 R429	2003-000586	R-METAL OXIDE(S);22Kohm,5%,2W,AF,TP,4x12	
.....5 R463	2003-001024	R-METAL OXIDE(S);150ohm,5%,2W,AF,TP,3.9x	
.....5 R310	2003-001024	R-METAL OXIDE(S);150ohm,5%,2W,AF,TP,3.9x	
.....5 R460	2003-002044	R-METAL OXIDE(S);100ohm,5%,1W,AF,TP,2.5x	
.....5 R427A	2003-002152	R-METAL OXIDE;1OHM,5%,2W,AG,TP,6X16MM	
.....5 R427	2003-002152	R-METAL OXIDE;1OHM,5%,2W,AG,TP,6X16MM	
.....5 R426	2003-002153	R-METAL OXIDE;4.7OHM,5%,2W,AG,TP,6X16MM	
.....5 R443A	2003-002156	R-METAL OXIDE;560OHM,5%,2W,AG,TP,6X16MM	
.....5 R443	2003-002156	R-METAL OXIDE;560OHM,5%,2W,AG,TP,6X16MM	
.....5 R464	2003-002158	R-METAL OXIDE;0.68OHM,5%,1W,AG,TP,4.3X12	
.....5 R421	2003-002159	R-METAL OXIDE;150OHM,5%,1W,AG,TP,4.3X12M	
.....5 R024	2004-001369	R-METAL(S);1.2Kohm,1%,1/2W,AA,TP,2.4x6.4	
.....5 R024	2004-001386	R-METAL(S);16.9Kohm,1%,1/2W,AA,TP,2.4x6.	
.....5 R024	2004-001395	R-METAL(S);330Kohm,2%,1/2W,AA,TP,2.4x6.4	
.....5 R024	2004-001402	R-METAL(S);6.8Kohm,1%,1/2W,AA,TP,2.4x6.4	
.....5 R024	2004-001408	R-METAL(S);91Kohm,1%,1/2W,AA,TP,2.4x6.4m	
.....5 R024	2004-001892	R-METAL(S);162Kohm,1%,1/2W,AA,TP,2.5x6.5	
.....5 R024	2004-001892	R-METAL(S);162Kohm,1%,1/2W,AA,TP,2.5x6.5	
.....5 R024	2004-001893	R-METAL(S);22Kohm,1%,1/2W,AA,TP,2.5x6.5m	
.....5 R024	2004-001897	R-METAL(S);43.2Kohm,1%,1/2W,AA,TP,2.5x6.	
.....5 R024	2004-001897	R-METAL(S);43.2Kohm,1%,1/2W,AA,TP,2.5x6.	
.....5 R024	2004-001984	R-METAL(S);26.7Kohm,1%,1/2W,AA,TP,2.4x6.	
.....5 R024	2004-001984	R-METAL(S);26.7Kohm,1%,1/2W,AA,TP,2.4x6.	
.....5 R024	2004-001984	R-METAL(S);26.7Kohm,1%,1/2W,AA,TP,2.4x6.	
.....5 R024	2004-002011	R-METAL(S);110Kohm,1%,1/2W,AA,TP,2.4x6.4	
.....5 R024	2004-004001	R-METAL(S);180Kohm,1%,1/2W,AA,TP,2.5x6.5	
.....5 R024	2004-004046	R-METAL(S);430Kohm,1%,1/2W,AA,TP,2.5x6.5	
.....5 R024	2004-004046	R-METAL(S);430Kohm,1%,1/2W,AA,TP,2.5x6.5	
.....5 R024	2004-004366	R-METAL(S);1.3Kohm,1%,1/2W,AA,TP,2.5x6.5	
.....5 R472	2008-000252	R-FUSIBLE(S);0.47ohm,10%,1/2W,AF,TP,2.5x	
.....5 R465	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
.....5 R449	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
.....5 R447	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
.....5 R445	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
.....5 R441	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
.....5 R442	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
.....5 R442A	2008-000253	R-FUSIBLE(S);0.47ohm,5%,1W,AF,TP,3.9x10m	
.....5 R440	2008-000282	R-FUSIBLE;0.47ohm,5%,1W,AA,TP,3.9x12mm	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 R424	2008-000289	R-FUSIBLE(S);1ohm,5%,1W,AA,TP,3.9x10mm	
.....5 R307	2008-000290	R-FUSIBLE(S);2.4ohm,5%,2W,AF,TP,3.9x10mm	
.....5 R486	2008-001018	R-FUSIBLE(S);0.47ohm,10%,2W,AF,TP,3.9x10	
.....5 R838	2008-001053	R-FUSIBLE;22ohm,5%,1/2W,AF,TP,2.5x6.5mm	
.....5 R306	2008-001076	R-FUSIBLE(S);1.8ohm,5%,2W,AF,TP,3.9x10mm	
.....5 R437	2008-001087	R-FUSIBLE(S);1.8ohm,5%,2W,AG,TP,3.9x12mm	
.....5 R485	2008-001137	R-FUSIBLE(S);3.3ohm,5%,1W,AF,TP,3.9x10mm	
.....5 R462	2008-001145	R-FUSIBLE;4.7OHM,5%,1/2W,AF,TP,2.5X6.5MM	
.....5 R853	2008-001152	R-FUSIBLE(S);1.3KOHM,5%,1/2W,AA,TP,2.5X6	
.....5 R833	2009-000017	R-METAL PLATE;0.1ohm,10%,5W,CL,TP,5x14x1	
.....5 R405	2009-001109	R-TEMPERATURE;240ohm,5%,1/4W,AA,TP,2.3x6	
⚠ 5 RR471S	2103-001024	VR-SEMI;50Kohm,25%,0.3W,TOP	
⚠ 5 RR402S	2103-001086	VR-SEMI;100KOHM,25%,0.3W,TOP	
.....5 C598	2201-000017	C-CERAMIC,DISC;1NF,10%,50V,Y5P,TP,5X3.5M	
.....5 C598	2201-000017	C-CERAMIC,DISC;1NF,10%,50V,Y5P,TP,5X3.5M	
.....5 C598	2201-000017	C-CERAMIC,DISC;1NF,10%,50V,Y5P,TP,5X3.5M	
.....5 C598	2201-000119	C-CERAMIC,DISC;100NF,+80-20%,50V,Y5V,TP,	
.....5 C598	2201-000119	C-CERAMIC,DISC;100NF,+80-20%,50V,Y5V,TP,	
.....5 C598	2201-000119	C-CERAMIC,DISC;100NF,+80-20%,50V,Y5V,TP,	
.....5 C598	2201-000119	C-CERAMIC,DISC;100NF,+80-20%,50V,Y5V,TP,	
.....5 C598	2201-000132	C-CERAMIC,DISC;0.1NF,10%,500V,Y5P,TP,6.5	
.....5 C598	2201-000132	C-CERAMIC,DISC;0.1NF,10%,500V,Y5P,TP,6.5	
.....5 C598	2201-000132	C-CERAMIC,DISC;0.1NF,10%,500V,Y5P,TP,6.5	
.....5 C598	2201-000132	C-CERAMIC,DISC;0.1NF,10%,500V,Y5P,TP,6.5	
.....5 C598	2201-000132	C-CERAMIC,DISC;0.1NF,10%,500V,Y5P,TP,6.5	
.....5 C598	2201-000138	C-CERAMIC,DISC;0.1NF,10%,50V,Y5P,TP,4X4M	
.....5 C598	2201-000146	C-CERAMIC,DISC;0.1NF,5%,50V,SL,TP,5X3.5M	
.....5 C598	2201-000146	C-CERAMIC,DISC;0.1NF,5%,50V,SL,TP,5X3.5M	
.....5 C598	2201-000180	C-CERAMIC,DISC;10NF,10%,50V,Y5V,TP,7X3MM	
.....5 C598	2201-000180	C-CERAMIC,DISC;10NF,10%,50V,Y5V,TP,7X3MM	
.....5 C598	2201-000332	C-CERAMIC,DISC;2.2NF,20%,250V,Y5U,TP,9X4	
.....5 C598	2201-000332	C-CERAMIC,DISC;2.2NF,20%,250V,Y5U,TP,9X4	
.....5 C598	2201-000332	C-CERAMIC,DISC;2.2NF,20%,250V,Y5U,TP,9X4	
.....5 C598	2201-000370	C-CERAMIC,DISC;0.22NF,10%,50V,Y5P,TP,4X3	
.....5 C598	2201-000406	C-CERAMIC,DISC;0.27NF,10%,2KV,Y5P,TP,6.3	
.....5 C598	2201-000551	C-CERAMIC,DISC;0.47NF,10%,1KV,Y5P,TP,6.3	
.....5 C598	2201-000551	C-CERAMIC,DISC;0.47NF,10%,1KV,Y5P,TP,6.3	
.....5 C598	2201-000551	C-CERAMIC,DISC;0.47NF,10%,1KV,Y5P,TP,6.3	
.....5 C598	2201-000551	C-CERAMIC,DISC;0.47NF,10%,1KV,Y5P,TP,6.3	
.....5 C598	2201-000551	C-CERAMIC,DISC;0.47NF,10%,1KV,Y5P,TP,6.3	
.....5 C598	2201-000558	C-CERAMIC,DISC;0.47NF,10%,50V,Y5P,TP,5X3	
.....5 C478	2301-000020	C-FILM,PEF;27nF,5%,100V,TP,7.3x4x12.5mm,	
.....5 C479	2301-000200	C-FILM,PEF;2.2nF,5%,200V,TP,11.0x6.0x9.0	
.....5 C477	2301-000213	C-FILM,PEF;220nF,5%,250V,TP,21.5x11,7.5	
.....5 CS801	2301-000356	C-FILM,PEF;47nF,5%,50V,TP,7.5x4.0x6.5,5m	
.....5 C493	2301-000356	C-FILM,PEF;47nF,5%,50V,TP,7.5x4.0x6.5,5m	
.....5 C412	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
.....5 C831	2301-001216	C-FILM,PPF;47nF,5%,630V,TP,20x14.5x22,7.	
.....5 C438	2303-000002	C-FILM,PPF;8.2nF 5% 400V TP 19X18X7,7.5m	
.....5 C432	2303-000002	C-FILM,PPF;8.2nF 5% 400V TP 19X18X7,7.5m	
.....5 C460	2303-000331	C-FILM,PPF;4.7nF,5%,630V,TP,19.5x12x7,7.	
.....5 C311	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
.....5 C487	2305-000178	C-FILM,MPEF;10nF,5%,100V,TP,-,5mm	
.....5 C309	2305-000285	C-FILM,MPEF;220NF,5%,100V,TP,10.5X5.5X15	
.....5 C871	2305-000289	C-FILM,MPEF;220nF,5%,63V,TP,-,5mm	
.....5 C838	2305-000412	C-FILM,MPEF;470nF,5%,63V,TP,-,5mm	
.....5 C865	2305-000427	C-FILM,MPEF;47nF,5%,100V,TP,7.5x12.5x3.5	
.....5 C303	2305-000427	C-FILM,MPEF;47nF,5%,100V,TP,7.5x12.5x3.5	
.....5 C301	2305-000427	C-FILM,MPEF;47nF,5%,100V,TP,7.5x12.5x3.5	
.....5 C429	2305-000704	C-FILM,MPEF;100nF,5%,250V,TP,16.5x10.3x5	
.....5 C480	2306-000122	C-FILM,MPPF;100nF,5%,50V,TP,7.3x4.0x5.0m	
.....5 C428	2306-000122	C-FILM,MPPF;100nF,5%,50V,TP,7.3x4.0x5.0m	
.....5 C701	2401-000025	C-AL;100uF,20%,16V,GP,TP,6.3x11,5	
.....5 C701	2401-000050	C-AL;10uF,20%,16V,GP,TP,5x11,2.5	
.....5 C701	2401-000164	C-AL;1000uF,20%,25V,WT,TP,12.5x20,5	
.....5 C701	2401-000262	C-AL;100uF,20%,160V,HR,TP,16x25,7.5	
.....5 C701	2401-000262	C-AL;100uF,20%,160V,HR,TP,16x25,7.5	
.....5 C701	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
.....5 C701	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
.....5 C701	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
.....5 C701	2401-000360	C-AL;100uF,20%,50V,GP,TP,8x11.5,5	
.....5 C701	2401-000365	C-AL;100uF,20%,50V,WT,TP,10x12.5mm,	
.....5 C701	2401-000365	C-AL;100uF,20%,50V,WT,TP,10x12.5mm,	
.....5 C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000603	C-AL;1UF,20%,50V,GP,TP,5X11,2	
.....5 C701	2401-000660	C-AL;2.2uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-000698	C-AL;2200uF,20%,16V,WT,TP,12.5x25,5	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 C701	2401-000703	C-AL;2200uF,20%,25V,GP,-,12.5x25mm,	
.....5 C701	2401-001026	C-AL;3.3UF,20%,50V,GP,TP,5X11,5	
.....5 C701	2401-001026	C-AL;3.3UF,20%,50V,GP,TP,5X11,5	
.....5 C701	2401-001192	C-AL;33uF,20%,50V,GP,TP,6.3x11,5	
.....5 C701	2401-001397	C-AL;470uF,20%,25V,GP,TP,10x16,5	
.....5 C701	2401-001428	C-AL;470uF,20%,50V,GP,TP,10x20,5	
.....5 C701	2401-001486	C-AL;47uF,20%,160V,HR,TP,13x20mm,5m	
.....5 C701	2401-001527	C-AL;47uF,20%,250V,HR,TP,13x25mm,5m	
.....5 C701	2401-001622	C-AL;6.8uF,20%,50V,BP,TP,16x25mm,7.	
.....5 C701	2401-001625	C-AL;6.8uF,20%,50V,GP,TP,5x11,5	
.....5 C701	2401-001655	C-AL;680uF,20%,25V,GP,TP,10x20,5	
.....5 C701	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
.....5 C701	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
.....5 C701	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
.....5 C701	2401-002216	C-AL;2200uF,20%,35V,GP,TP,16x25,7.5	
.....5 C701	2401-002216	C-AL;2200uF,20%,35V,GP,TP,16x25,7.5	
.....5 C701	2401-002288	C-AL;470uF,20%,25V,WT,TP,10x20,5	
.....5 C701	2401-002288	C-AL;470uF,20%,25V,WT,TP,10x20,5	
.....5 C701	2401-002300	C-AL;47uF,20%,50V,GP,TP,6.3x11,5	
.....5 C701	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	
.....5 C701	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	
.....5 C701	2401-003114	C-AL;4.7uF,20%,250V,WT,TP,10x16,5	
.....5 L431	2701-000116	INDUCTOR-AXIAL;10uH,10%,4.2x9.8mm	
.....5 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
.....5 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
.....5 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
.....5 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
.....5 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
.....5 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
.....5 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
.....5 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
.....5 F101	2901-000297	FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-	
.....5 F101	2901-000299	FILTER-EMI ON BOARD;-,6A,UL/CSA,-,9x7.5,	
.....5 G101	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
.....5 G101	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
.....5 G101	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
.....5 G101	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
.....5 G101	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
.....5 G101	3301-000287	CORE-FERRITE BEAD;AA,3.5x1.0x6.0mm,1500,	
.....5 G101	3301-000374	CORE-FERRITE BEAD;AA,3.5x1.0x9.0mm,-,-	
.....5 G101	3301-000374	CORE-FERRITE BEAD;AA,3.5x1.0x9.0mm,-,-	
⚠ 5 FD801S	3601-000120	FUSE-AXIAL LEAD;125V,2.5A,FAST-ACTING,GL	
⚠ 5 FD871S	3601-001086	FUSE-AXIAL LEAD;125V,5A,FAST-ACTING,GLAS	
⚠ 5 FD854S	3601-001086	FUSE-AXIAL LEAD;125V,5A,FAST-ACTING,GLAS	
⚠ 5 FD805S	3601-001086	FUSE-AXIAL LEAD;125V,5A,FAST-ACTING,GLAS	
⚠ 5 FD802S	3601-001228	FUSE-AXIAL LEAD;125V,10A,FAST-ACTING,EPO	
⚠ 5 FD855S	3601-001228	FUSE-AXIAL LEAD;125V,10A,FAST-ACTING,EPO	
.....5 F801B	3602-000114	FUSE-HOLDER;-,-,30mohm	
.....5 F801A	3602-000114	FUSE-HOLDER;-,-,30mohm	
.....5 CN906	3711-002645	CONNECTOR-HEADER;BOX,6P,1R,2.5mm,STRAIGH	
.....5 EY52	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EY53	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EY54	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EY55	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EY51	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EY42	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EY41	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EY40	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EY63	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EY62	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EY61	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EY60	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EY59	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EY58	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EY57	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EY56	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EL08	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EL07	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EL06	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EL05	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EL04	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EL03	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EL02	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EL01	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EY39	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EL16	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A

Loc. No.	Code No.	Description ; Specification	Remark
.....5 EL15	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EL14	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EL10	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EL11	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EL12	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EL13	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
.....5 EY37	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY38	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY43	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY44	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY36	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY35	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY34	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY32	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY66	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY65	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY64	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY50	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY49	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY47	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY46	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY45	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY23	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY22	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY21	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY20	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY19	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY18	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY17	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY16	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY31	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY30	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY29	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY28	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY27	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY26	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY25	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY24	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY67	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY91	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY90	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY89	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY88	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY87	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY86	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY85	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY84	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY99	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY98	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY97	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY96	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY95	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY94	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY93	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY92	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY75	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY74	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY73	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY72	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY71	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY70	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY69	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY68	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY83	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY82	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY81	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY80	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY79	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY78	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY77	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY76	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY114	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY113	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY111	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY11	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY109	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY108	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A

Loc. No.	Code No.	Description ; Specification	Remark
.....5 EY107	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY106	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY121	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY120	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY12	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY119	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY118	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY117	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY116	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY115	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY08	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY07	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY06	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY05	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY04	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY03	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY02	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY01	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY105	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY104	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY103	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY102	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY101	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY100	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY10	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY09	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY122	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY148	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY147	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY142	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY141	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY140	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY14	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY139	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY138	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY155	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY154	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY153	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY152	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY151	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY150	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY15	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY149	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY13	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY129	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY128	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY127	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY126	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY125	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY124	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY123	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY137	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY136	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY135	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY134	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY130	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY131	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY132	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 EY133	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
.....5 GT404	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT433	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT801	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT802	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT807	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT810	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT811	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT14	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT15	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT16	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT17	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT33	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT34	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 GT35	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
.....5 0	AA41-00598D	PCB-SUB;HCM4215W,CEM-1,1L,D,1.6T,330X245	S.N.A
.....5 R024	2004-005051	R-METAL(S);2.2KOHM,1%,1/2W,AA,TP,2.4X6.4	
⚠ 5 RS801S	3601-000102	FUSE-AXIAL LEAD;125V,1A,FAST-ACTING,GLAS	
.....5 R840	2001-001045	R-CARBON(S);1.2KOHM,5%,1/2W,AA,TP,2.4X6.	

Loc. No.	Code No.	Description ; Specification	Remark
.....5 R841	2003-002102	R-METAL OXIDE(S);68Kohm,5%,2W,AF,TP,4x12	
.....5 R024	2004-004029	R-METAL(S);10Kohm,1%,1/2W,AA,TP,2.5x6.5m	
.....5 R801	2003-002285	R-METAL OXIDE(S);1.5KOHM,5%,2W,AF,TP,6X1	
.....5 DZ016	0403-000698	DIODE-ZENER;TZP12A,12V,11.4-12.6V,1W,DO-	
.....5 Q409	0505-001723	FET-SILICON;FQP630TSTU,N,200V,9A,0.4OHM,	
.....5 Q409	0505-001723	FET-SILICON;FQP630TSTU,N,200V,9A,0.4OHM,	
....4 Q473	BP96-00006B	ASSY HEAT SINK P;HS,SCREW,IRF640B,2SC412	S.N.A
.....5 CIS	0205-001027	OIL-SILICON;G746,-,-	S.N.A
.....5 T0090	0502-001100	TR-POWER;2SC4125,NPN,70W,TO-3PML,BK,8-	
.....5 Q409	0505-001722	FET-SILICON;IRFS640B,N,200V,18A,0.18OHM,	
.....5 T0081	6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	S.N.A
.....5 CIS	AA60-30001A	WASHER-PLATE;M3,ID3.5,15X8.5,T1.0,SBHG	S.N.A
.....5 CIS	BP62-00001A	HEAT SINK;COMMANDO,A1050P,T2.0,W62.0,H50	S.N.A
....4 T0121	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
..2 T0105	BP94-00239A	ASSY PCB MISC-DY-JACK;DP,HCM4215W3S/XAA,	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3 GT13	AA60-40012D	PIN-GT,ASSY;T1.6,6-12.5-,NYLON66	S.N.A
...3 GT09	AA60-40012D	PIN-GT,ASSY;T1.6,6-12.5-,NYLON66	S.N.A
...3 GT05	AA60-40012D	PIN-GT,ASSY;T1.6,6-12.5-,NYLON66	S.N.A
...3 GT01	AA60-40012D	PIN-GT,ASSY;T1.6,6-12.5-,NYLON66	S.N.A
...3	AA61-01197A	HOLDER-PCB,DY;COMANDO,ABS V0,BLK	S.N.A
...3	AA97-07230N	ASSY AUTO;COMMANDO	S.N.A
....4 R301	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4	
....4 R302	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4	
....4 R303	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4	
....4 PCB	AA41-00632A	PCB-DY CONNECTION;HCM4215W,FR-1,1L,A,1.6	S.N.A
..2 T0100	BP94-00338A	ASSY PCB MISC-A/V FRONT;DP,HCM473W3S/XAA	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3 SW101	3404-000208	SWITCH-TACT;12V,50mA,120gf,6x6mm,SPST	
...3 CN906	3711-000447	CONNECTOR-HEADER;BOX,3P,1R,2.5MM,ANGLE,-	
...3 CN906	3711-003601	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,ANGLE,	
...3 JK101	3722-000544	JACK-VHS;4P,11.5mm,AG,BLK,N	
...3 JK102	3722-001164	JACK-PIN;3P,3.4mm,SN,WH:YE:RE,#16-22	
...3 T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
...3 T0076	AA39-00260A	LEAD CONNECTOR-ASSY;,UL1007#26,UL/CSA,3P	
...3	AA63-10002A	BAND-TIE;NYLON66 V2,L100,NTR	S.N.A
...3 T0014	AA91-00762D	ASSY-JACK,SIDE;,P54A PAL XAA,W3	
....4	AA61-00793C	HOLDER-JACK;W3,ABS HB,BLK,DG703P	S.N.A
....4 T0150	AA64-02085D	DOOR-AV;W3,ABS HB,BLK,DG703P	S.N.A
....4	AA64-02086E	INLAY-AV;W3,PS SHEET,T0.5,P55A	S.N.A
...3	AA97-07429A	ASSY AUTO-A/V FRONT;HCM4215WX/XAA,P55A	S.N.A
....4 R125	2001-000006	R-CARBON;2.4KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 PCB	AA41-00499B	PCB-FRONT A/V;SVP-54T6SR,FR-1,1L,A,1.6T,	S.N.A
...3 CNW01A	BP39-00016B	LEAD CONNECTOR;HCL4715WB,UL2547#26,UL/CS	
..2 T0098	BP94-00346A	ASSY PCB MISC-VM;DP,HCM5525J3S/XAA,P55A	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3 RZ120	2008-001097	R-FUSIBLE(S);33OHM,5%,1/2W,AC,BK,2.5X6.5	
...3 T0121	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
...3 T0079	AA33-00017A	MAGNET CONVERGENCE;JH 92LT - 29G,-,29.1M	
...3 T0076	AA39-20055F	LEAD CONNECTOR-ASSY;,6P,700MM,YBNH250-06	
...3 QZ102	AA96-00243L	ASSY H/S;-,CRT,AA62-000450A,2SC2344,HERC	S.N.A
....4	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4 T0090	0502-000153	TR-POWER;2SC2344-D,NPN,1.2W,TO-220,-,60	
....4 T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
....4	AA62-00045A	HEAT SINK-PS;-,-,T1.0,-,-,DREAM,-,-,-,-,	S.N.A
...3 QZ101	AA96-00243M	ASSY H/S;-,AMP,AA62-000450A,2SA1011,HERC	S.N.A
....4	0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4 T0090	0502-000131	TR-POWER;2SA1011-D,PNP,1.2W,TO-220,-,60	
....4 T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
....4	AA62-00045A	HEAT SINK-PS;-,-,T1.0,-,-,DREAM,-,-,-,-,	S.N.A
...3	AA97-07230M	ASSY AUTO-VM;COMMANDO	S.N.A
....4 DZ106	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 DZ105	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 DZ102	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4 T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4 QZ103	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4 QZ106	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 QZ105	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 QZ104	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4 RZ122	2001-000019	R-CARBON(S);10OHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R125	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	

Loc. No.		Code No.	Description ; Specification	Remark
....4	R125	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000554	R-CARBON;270OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000666	R-CARBON;330HM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000832	R-CARBON;510OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	RZ110	2001-001100	R-CARBON(S);2.7OHM,5%,1/2W,AA,TP,2.4X6.4	
....4	RZ104	2001-001100	R-CARBON(S);2.7OHM,5%,1/2W,AA,TP,2.4X6.4	
....4	RZ105	2001-001139	R-CARBON(S);39KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4	RZ106	2001-001139	R-CARBON(S);39KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4	RZ114	2003-000532	R-METAL OXIDE(S);18ohm,5%,2W,AF,TP,4x12m	
....4	RZ103	2003-000713	R-METAL OXIDE(S);47ohm,5%,2W,AF,TP,4x12m	
....4	RZ111	2003-000713	R-METAL OXIDE(S);47ohm,5%,2W,AF,TP,4x12m	
....4	RZ123	2003-002157	R-METAL OXIDE;220OHM,5%,2W,AG,TP,6X16MM	
....4	RZ113	2003-002157	R-METAL OXIDE;220OHM,5%,2W,AG,TP,6X16MM	
....4	RZ112	2003-002157	R-METAL OXIDE;220OHM,5%,2W,AG,TP,6X16MM	
....4	RFZ101	2008-001086	R-FUSIBLE(S);3.3ohm,5%,2W,AG,TP,3.9x12mm	
....4	C598	2201-000193	C-CERAMIC,DISC;0.01NF,0.25PF,50V,C0G,TP,	
....4	C598	2201-000193	C-CERAMIC,DISC;0.01NF,0.25PF,50V,C0G,TP,	
....4	C598	2201-000516	C-CERAMIC,DISC;4.7NF,+100-0%,500V,Y5U,TP	
....4	C598	2201-000516	C-CERAMIC,DISC;4.7NF,+100-0%,500V,Y5U,TP	
....4	C598	2201-000604	C-CERAMIC,DISC;0.056NF,+100-0%,500V,SL,T	
....4	C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
....4	C701	2401-000832	C-AL;220uF,20%,25V,GP,TP,8x11.5,5	
....4	C701	2401-001157	C-AL;33uF,20%,160V,GP,TP,12.5x20,5	
....4	C701	2401-001220	C-AL;4.7uF,20%,160V,GP,TP,8x11.5,5	
....4	C701	2401-001220	C-AL;4.7uF,20%,160V,GP,TP,8x11.5,5	
....4	C701	2401-001513	C-AL;47uF,20%,16V,WT,TP,5x11,5	
....4	C701	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	
....4	LZ101	2701-000002	INDUCTOR-AXIAL;100uH,10%,4.2x9.8mm	
....4	CN906	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
....4	CN906	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
....4	CN906	3711-002642	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH	
....4	PCB	AA41-00611A	PCB-VM;HCM4215W,FR-1,1L,A,1.6T,245X245,P	S.N.A
...3	T0081	6003-001023	SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW	S.N.A
..2	T0099	BP94-00503R	ASSY PCB CRT-PCB EMI;DP,HCN4727WSC/XAA,P	
...3		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3	VR501	2101-000321	VR-ROTARY;1Mohm,-,0.6W,SIDE	
...3	VR531	2101-000321	VR-ROTARY;1Mohm,-,0.6W,SIDE	
...3	VR561	2101-000321	VR-ROTARY;1Mohm,-,0.6W,SIDE	
...3	C701	2401-000480	C-AL;10uF,20%,50V,GP,TP,5x11,5	
...3	T0121	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
...3	T0121	3301-001502	CORE-FERRITE;AE,16.5°ø7°ø30MM,-,-	
...3	V501	3704-001019	SOCKET-CRT;10P,29.1PI,35.5PI,AU30U,-	
...3	V531	3704-001019	SOCKET-CRT;10P,29.1PI,35.5PI,AU30U,-	
...3	V561	3704-001019	SOCKET-CRT;10P,29.1PI,35.5PI,AU30U,-	
...3	CN906	3711-002645	CONNECTOR-HEADER;BOX,6P,1R,2.5mm,STRAIGH	
...3	CN906	3711-002648	CONNECTOR-HEADER;BOX,9P,1R,2.5mm,STRAIGH	
...3	CN906	3711-003052	CONNECTOR-HEADER;BOX,10P,1R,2.5MM,STRAIG	
...3	CN906	3711-003052	CONNECTOR-HEADER;BOX,10P,1R,2.5MM,STRAIG	
...3	CN906	3711-003973	CONNECTOR-HEADER;BOX,11P,1R,2.5mm,STRAIG	
...3	CN906	3711-003973	CONNECTOR-HEADER;BOX,11P,1R,2.5mm,STRAIG	
...3	SG301	4715-001050	SURGE ABSORBER;2.4kV,20%,1500A,-,DISC-RA	
...3		6902-000395	BAG PE;LDPE,T0.05,W200,L140,,,	S.N.A
...3	SG562	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm MIN,	
...3	SG532	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm MIN,	
...3	SG502	AA27-00084A	COIL;S-23,-,-,-,-,-,-,S-23,5000Mohm MIN,	
...3	T0076	AA39-00112A	LEAD CONNECTOR-ASSY;,UL1007#26,UL/CSA,10	
...3	T0076	AA39-00120F	LEAD CONNECTOR-ASSY;SIR-T165,UL1007#26,U	
...3	T0076	AA39-00198A	LEAD CONNECTOR-ASSY;,3P,900/600MM,YFH800	
...3	T0076	AA39-20010D	LEAD CONNECTOR-ASSY;,1P,400,YFH800-01,S,	
...3	T0076	AA39-20010D	LEAD CONNECTOR-ASSY;,1P,400,YFH800-01,S,	
...3	T0076	AA39-20010E	LEAD CONNECTOR-ASSY;,1P,800,YFH800-01,S,	
...3	T0076	AA39-20010F	LEAD CONNECTOR-ASSY;,1P,700,YFH800-01,S,	
...3	T0076	AA39-20027H	LEAD CONNECTOR-ASSY;,6P,700MM,67096-006,	
...3	T0076	AA39-20031G	LEAD CONNECTOR-ASSY;,9P,800,67096-009,S,	
...3		AA63-10002A	BAND-TIE;NYLON66 V2,L100,NTR	S.N.A
...3		AA69-01396A	BAG PE;SKD CHASSIS,LDPE,T0.03,240,180,NO	S.N.A
...3	Q371	AA96-00244H	ASSY H/S;SCREW,2SC4636(2),CRT,SLICON-OIL	S.N.A
....4		0205-000129	GREASE-SILICON;SC102,JAPAN	S.N.A
....4	T0090	0502-000442	TR-POWER;2SC4636RB,NPN,2W,TO-220,ST,10-	
....4	T0081	6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR	S.N.A
....4		AA62-00046A	HEAT SINK-PS;-,-,T1.0,-,D1(DREAM) 60X25X	S.N.A
...3	IC501	AA96-50311L	ASSY H/S;-,AMP,AA62-30175D ,TDA6111Q,HE	S.N.A
...3	IC531	AA96-50311L	ASSY H/S;-,AMP,AA62-30175D ,TDA6111Q,HE	S.N.A
...3	IC561	AA96-50311L	ASSY H/S;-,AMP,AA62-30175D ,TDA6111Q,HE	S.N.A
....4	T0074	1201-001131	IC-VIDEO AMP;6111,SIP,9P,-,SINGLE,-,PLAS	

Loc. No.		Code No.	Description ; Specification	Remark
....4	T0081	6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR	
....4		AA62-30175D	HEAT SINK-PS;-,SECC,T1.0,-,33X15X30 FT-2	S.N.A
...3		AA97-07608A	ASSY AUTO-CRT;HCM4215W	S.N.A
....4	D372	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4	D504	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4	D509	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4	D361	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4	D362	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4	D371	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4	D510	0401-000005	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,	
....4	T0083	0402-000493	DIODE-RECTIFIER;1R5GU41,400V,1.5A,DO-15L	
....4	T0083	0402-000493	DIODE-RECTIFIER;1R5GU41,400V,1.5A,DO-15L	
....4	T0083	0402-000493	DIODE-RECTIFIER;1R5GU41,400V,1.5A,DO-15L	
....4	T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4	T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4	T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4	T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4	T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4	T0083	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.0A,DO-41,T	
....4	DZ016	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
....4	DZ016	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
....4	DZ016	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
....4	DZ016	0403-000708	DIODE-ZENER;MTZJ13B,13V,12.55-13.21V,500	
....4	DZ016	0403-000708	DIODE-ZENER;MTZJ13B,13V,12.55-13.21V,500	
....4	DZ016	0403-000708	DIODE-ZENER;MTZJ13B,13V,12.55-13.21V,500	
....4	DZ016	0403-000708	DIODE-ZENER;MTZJ13B,13V,12.55-13.21V,500	
....4	Q563	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4	Q534	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4	Q533	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4	Q504	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4	Q361	0501-000283	TR-SMALL SIGNAL;KSA539,PNP,400mW,TO-92,T	
....4	Q362	0501-000366	TR-SMALL SIGNAL;KSC2330-Y,NPN,1W,TO-92L,	
....4	Q502	0501-000389	TR-SMALL SIGNAL;KSC815,NPN,400mW,TO-92,T	
....4	T0090	0502-000006	TR-POWER;KSC1507,NPN,15W,TO-220,TP,120-	
....4	T0090	0502-000006	TR-POWER;KSC1507,NPN,15W,TO-220,TP,120-	
....4	T0090	0502-000006	TR-POWER;KSC1507,NPN,15W,TO-220,TP,120-	
....4	R125	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000009	R-CARBON;20KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R584	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
....4	R554	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
....4	R524	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4	
....4	R580	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4	R550	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4	R520	2001-000066	R-CARBON(S);10KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4	R577	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
....4	R547	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
....4	R517	2001-000085	R-CARBON(S);100KOHM,5%,1/2W,AA,TP,2.4X6.	
....4	R366	2001-000109	R-CARBON(S);470OHM,5%,1/2W,AA,TP,2.4X6.4	
....4	R125	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000539	R-CARBON;24KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000577	R-CARBON;2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000660	R-CARBON;33KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000723	R-CARBON;4.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000938	R-CARBON;68OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R125	2001-001015	R-CARBON;9.1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4	R581	2001-001052	R-CARBON(S);1.5MOHM,5%,1/2W,AA,TP,2.4X6.	
....4	R551	2001-001052	R-CARBON(S);1.5MOHM,5%,1/2W,AA,TP,2.4X6.	
....4	R521	2001-001052	R-CARBON(S);1.5MOHM,5%,1/2W,AA,TP,2.4X6.	
....4	R371	2001-001065	R-CARBON(S);110KOHM,5%,1/2W,AA,TP,2.4X6.	
....4	R370	2001-001065	R-CARBON(S);110KOHM,5%,1/2W,AA,TP,2.4X6.	
....4	R369A	2001-001065	R-CARBON(S);110KOHM,5%,1/2W,AA,TP,2.4X6.	
....4	R367	2001-001065	R-CARBON(S);110KOHM,5%,1/2W,AA,TP,2.4X6.	
....4	R368	2001-001065	R-CARBON(S);110KOHM,5%,1/2W,AA,TP,2.4X6.	

Loc. No.	Code No.	Description ; Specification	Remark
....4 R369	2001-001065	R-CARBON(S);110KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R567	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R537	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R507	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R381	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 R361	2001-001097	R-CARBON(S);2.4KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R374	2001-001110	R-CARBON(S);240KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R373	2001-001110	R-CARBON(S);240KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R372	2001-001110	R-CARBON(S);240KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R377	2001-001110	R-CARBON(S);240KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R375	2001-001113	R-CARBON(S);270KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R365	2001-001120	R-CARBON(S);3.3OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R574	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R544	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R514	2001-001122	R-CARBON(S);3.9KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R583	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
....4 R582	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
....4 R553	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
....4 R552	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
....4 R523	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
....4 R522	2002-001006	R-COMPOSITION;4.7KOHM,15%,1/2W,AA,TP,3.7	
....4 R589	2002-001015	R-COMPOSITION;47Kohm,5%,1/2W,AA,TP,3.7x9	
....4 R559	2002-001015	R-COMPOSITION;47Kohm,5%,1/2W,AA,TP,3.7x9	
....4 R529	2002-001015	R-COMPOSITION;47Kohm,5%,1/2W,AA,TP,3.7x9	
....4 R575	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
....4 R545	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
....4 R515	2002-001017	R-COMPOSITION;1Kohm,10%,1/2W,AA,TP,3.7x9	
....4 R579	2002-001021	R-COMPOSITION;560KOHM,5%,1/2W,AA,TP,3.7X	
....4 R578	2002-001021	R-COMPOSITION;560KOHM,5%,1/2W,AA,TP,3.7X	
....4 R549	2002-001021	R-COMPOSITION;560KOHM,5%,1/2W,AA,TP,3.7X	
....4 R518	2002-001021	R-COMPOSITION;560KOHM,5%,1/2W,AA,TP,3.7X	
....4 R519	2002-001021	R-COMPOSITION;560KOHM,5%,1/2W,AA,TP,3.7X	
....4 R548	2002-001021	R-COMPOSITION;560KOHM,5%,1/2W,AA,TP,3.7X	
....4 R588	2003-000738	R-METAL OXIDE(S);56Kohm,5%,2W,AA,TP,4x12	
....4 R538	2003-000738	R-METAL OXIDE(S);56Kohm,5%,2W,AA,TP,4x12	
....4 R508	2003-000738	R-METAL OXIDE(S);56Kohm,5%,2W,AA,TP,4x12	
....4 R024	2004-001892	R-METAL(S);162Kohm,1%,1/2W,AA,TP,2.5x6.5	
....4 R024	2004-001892	R-METAL(S);162Kohm,1%,1/2W,AA,TP,2.5x6.5	
....4 R024	2004-001892	R-METAL(S);162Kohm,1%,1/2W,AA,TP,2.5x6.5	
....4 R573	2008-001129	R-FUSIBLE(S);1.5ohm,5%,1/2W,AF,TP,2.5x6.	
....4 R543	2008-001129	R-FUSIBLE(S);1.5ohm,5%,1/2W,AF,TP,2.5x6.	
....4 R513	2008-001129	R-FUSIBLE(S);1.5ohm,5%,1/2W,AF,TP,2.5x6.	
....4 C598	2201-000119	C-CERAMIC,DISC;100NF,+80-20%,50V,Y5V,TP,	
....4 C598	2201-000119	C-CERAMIC,DISC;100NF,+80-20%,50V,Y5V,TP,	
....4 C598	2201-000119	C-CERAMIC,DISC;100NF,+80-20%,50V,Y5V,TP,	
....4 C598	2201-000556	C-CERAMIC,DISC;0.47NF,10%,500V,Y5P,TP,5.	
....4 C598	2201-000723	C-CERAMIC,DISC;4.7NF,20%,3KV,Y5U,TP,16X5	
....4 C598	2201-000723	C-CERAMIC,DISC;4.7NF,20%,3KV,Y5U,TP,16X5	
....4 C598	2201-000723	C-CERAMIC,DISC;4.7NF,20%,3KV,Y5U,TP,16X5	
....4 C598	2201-000983	C-CERAMIC,DISC;1NF,10%,2KV,Y5P,TP,9X5MM,	
....4 C598	2201-000983	C-CERAMIC,DISC;1NF,10%,2KV,Y5P,TP,9X5MM,	
....4 C598	2201-000983	C-CERAMIC,DISC;1NF,10%,2KV,Y5P,TP,9X5MM,	
....4 C565	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
....4 C535	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
....4 C505	2305-000149	C-FILM,MPEF;100nF,5%,100V,TP,12x12.5x6.5	
....4 C507	2305-000154	C-FILM,MPEF;100nF,5%,400V,TP,21.5x6.5x11	
....4 C537	2305-000154	C-FILM,MPEF;100nF,5%,400V,TP,21.5x6.5x11	
....4 C567	2305-000154	C-FILM,MPEF;100nF,5%,400V,TP,21.5x6.5x11	
....4 C361	2306-000122	C-FILM,MPPF;100nF,5%,50V,TP,7.3x4.0x5.0m	
....4 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000133	C-AL;1000uF,20%,16V,GP,TP,10x20,5	
....4 C701	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
....4 C701	2401-000302	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
....4 C701	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
....4 C701	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
....4 C701	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
....4 C701	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
....4 C701	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
....4 C701	2401-000430	C-AL;10uF,20%,250V,GP,TP,10x16mm,5m	
....4 C701	2401-001621	C-AL;6.8uF,20%,450V,GP,TP,13x20,5	
....4 L531	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
....4 L501	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
....4 SG561	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
....4 SG563	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
....4 SG533	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	

Loc. No.	Code No.	Description ; Specification	Remark
....4 SG501	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
....4 SG503	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
....4 SG531	4715-001036	SURGE ABSORBER;500V,20%,-,-,TP	
....4 EL06	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EL03	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 EL563	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL537	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL536	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL535	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL564	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL565	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL566	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL567	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL534	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL01	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL02	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL04	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL05	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL533	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL505	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL504	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 EL503	6042-000001	EYELET;ID2.2,OD2.7,L3.1,NI+SN,BSP3-1/2H	S.N.A
....4 GT537	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT561	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT536	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT535	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT534	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT562	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT568	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT567	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT564	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT563	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT503	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT502	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT501	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT373	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT372	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT371	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT504	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT533	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT532	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT531	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT506	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT374	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 GT375	AA60-40014A	PIN-GT,ASSY;AUTO	S.N.A
....4 R125	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 DZ016	0403-000334	DIODE-ZENER;UZ2.7BSA,2.7V,2.54-2.75V,500	
....4 DZ016	0403-000334	DIODE-ZENER;UZ2.7BSA,2.7V,2.54-2.75V,500	
....4 DZ016	0403-000334	DIODE-ZENER;UZ2.7BSA,2.7V,2.54-2.75V,500	
....4 R566	2001-001049	R-CARBON(S);1.3KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R536	2001-001049	R-CARBON(S);1.3KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R506	2001-001049	R-CARBON(S);1.3KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R125	2001-000007	R-CARBON;3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000006	R-CARBON;2.4KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 C598	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.	
....4 C598	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.	
....4 C598	2201-000599	C-CERAMIC,DISC;0.56NF,10%,500V,Y5P,TP,5.	
....4 C701	2401-001571	C-AL;47uF,+20%-0%,50V,GP,TP,8x11.5,	
....4 C701	2401-001571	C-AL;47uF,+20%-0%,50V,GP,TP,8x11.5,	
....4 C701	2401-001571	C-AL;47uF,+20%-0%,50V,GP,TP,8x11.5,	
....4 R125	2001-000319	R-CARBON;120KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000232	R-CARBON;1.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000908	R-CARBON;62KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000908	R-CARBON;62KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000908	R-CARBON;62KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 L561	2701-000168	INDUCTOR-AXIAL;3.3uH,5%,2.5x3.4mm	
....4 R382	2002-001014	R-COMPOSITION;6.8Kohm,10%,1/2W,AA,TP,3.7	
....4 PCB	AA41-00600E	PCB-CRT;HCM4215W,FR-1,1L,E,1.6T,245X197(	S.N.A
....4 T0083	0402-000243	DIODE-RECTIFIER;RC2-V1,2000V,0.2A,DO-201	
...3 T0076	BP39-00004B	LEAD CONNECTOR-ASSY;P55A/HCM4215W,UL3239	
...3 T0076	BP39-00004C	LEAD CONNECTOR-ASSY;P55A/HCM4215W,UL3239	

Loc. No.	Code No.	Description ; Specification	Remark
...3 T0076	BP39-00004C	LEAD CONNECTOR-ASSY;P55A/HCM4215W,UL3239	
...3 T0103	BP59-00005A	MODULE-FOCUS PACK ASS'Y;PJT TV,F301-P03A	
..2 T0098	BP94-00517C	ASSY PCB MISC-CONTROL;DP,HCN4727WSC/XAA,	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3 LEDY01	0601-001381	LED;ROUND,RED/GRN,5.0MM,650/563NM	
...3 T0121	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
...3 SWY08	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3 SWY07	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3 SWY06	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3 SWY05	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3 SWY04	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3 SWY03	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3 SWY02	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3 SWY01	3404-001006	SWITCH-TACT;12V,50mA,160gf,6x6mm,SPST	
...3 CN906	3711-000447	CONNECTOR-HEADER;BOX,3P,1R,2.5MM,ANGLE,-	
...3 CN906	3711-003353	CONNECTOR-HEADER;BOX,11P,1R,2.5mm,ANGLE,	
...3 RMY01	AA32-00012A	MODULE REMOCON;ORC-50HF2,38KHZ,940NM,MES	
...3 T0076	AA39-00223C	LEAD CONNECTOR-ASSY;P54A/SVP-42W5HD,UL10	
...3 T0076	AA39-00259A	LEAD CONNECTOR-ASSY;,UL1007#26,UL/CSA,3P	
...3	BP97-00503K	ASSY AUTO;HCN4727WX,P55A	S.N.A
....4 DZ016	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
....4 DZ016	0403-000510	DIODE-ZENER;MTZJ6.2B,6.2V,5.96-6.27V,500	
....4 QY01	0504-000123	TR-DIGITAL;KSR1010,NPN,300mW,10K,TO-92,T	
....4 RY07	2001-000020	R-CARBON(S);22OHM,5%,1/2W,AA,TP,2.4X6.4M	
....4 RY09	2001-000109	R-CARBON(S);470OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R125	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000832	R-CARBON;510OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000832	R-CARBON;510OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000832	R-CARBON;510OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RY08	2001-001108	R-CARBON(S);22KOHM,5%,1/2W,AA,TP,2.4X6.4	
....4 C701	2401-002009	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	
....4 0	BP41-00025B	PCB CONTROL;HCN4727W,CONTROL,1L,1.6T,245	S.N.A
...3	AA69-01396A	BAG PE;SKD CHASSIS,LDPE,T0.03,240,180,NO	S.N.A
..2 T0094	BP94-00517D	ASSY PCB MISC-CG AMP;DP,HCN4727WSC/XAA,P	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3 CN906	3711-003043	CONNECTOR-HEADER;BOX,4P,1R,2.5MM,STRAIGH	
...3 CN906	3711-003043	CONNECTOR-HEADER;BOX,4P,1R,2.5MM,STRAIGH	
...3 CN906	3711-003043	CONNECTOR-HEADER;BOX,4P,1R,2.5MM,STRAIGH	
...3 CN906	3711-003043	CONNECTOR-HEADER;BOX,4P,1R,2.5MM,STRAIGH	
...3 CN906	3711-003046	CONNECTOR-HEADER;BOX,9P,1R,2.5MM,STRAIGH	
...3	AA65-30110A	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,	S.N.A
...3	AA97-07418A	ASSY AUTO;HCM4215WX/XAA,P55A	S.N.A
....4 R125	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 R125	2001-000857	R-CARBON;560OHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 RZ109	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RZ108	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RZ107	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RZ106	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RZ105	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 RZ104	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,TP,2.4X6.4	
....4 R857	2001-001155	R-CARBON(S);5.6KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 R856	2001-001155	R-CARBON(S);5.6KOHM,5%,1/2W,AA,TP,2.4X6.	
....4 RZ142	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ143	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ144	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ145	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ146	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ147	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ123	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ124	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ125	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	

Loc. No.	Code No.	Description ; Specification	Remark
....4 RZ128	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ127	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ126	2003-002148	R-METAL OXIDE;3.9OHM,2%,2W,AF,TP,3.9X10M	
....4 RZ132	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ132A	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ148	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ148A	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ149	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ149A	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ129	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ129A	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ130	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ131A	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ131	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RZ130A	2003-002171	R-METAL OXIDE(S);150ohm,5%,2W,AG,TP,3.9x	
....4 RFZ50	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
....4 RFZ51	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
....4 RFZ52	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
....4 RFZ53	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
....4 RFZ19	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
....4 RFZ20	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
....4 RFZ21	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
....4 RFZ22	2008-000261	R-FUSIBLE(S);150ohm,5%,1W,AF,TP,3.9x10mm	
....4 C598	2201-000327	C-CERAMIC,DISC;2.2NF,10%,50V,Y5V,TP,6.5X	
....4 C598	2201-000327	C-CERAMIC,DISC;2.2NF,10%,50V,Y5V,TP,6.5X	
....4 C598	2201-000327	C-CERAMIC,DISC;2.2NF,10%,50V,Y5V,TP,6.5X	
....4 C598	2201-000327	C-CERAMIC,DISC;2.2NF,10%,50V,Y5V,TP,6.5X	
....4 C689	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
....4 C689	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
....4 C689	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
....4 C689	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
....4 C689	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
....4 C689	2202-000121	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
....4 C689	2202-000205	C-CERAMIC,MLC-AXIAL;22pF,5%,50V,SL,TP,1.	
....4 C689	2202-000205	C-CERAMIC,MLC-AXIAL;22pF,5%,50V,SL,TP,1.	
....4 C689	2202-000205	C-CERAMIC,MLC-AXIAL;22pF,5%,50V,SL,TP,1.	
....4 C689	2202-000205	C-CERAMIC,MLC-AXIAL;22pF,5%,50V,SL,TP,1.	
....4 C689	2202-000205	C-CERAMIC,MLC-AXIAL;22pF,5%,50V,SL,TP,1.	
....4 CZ113	2202-000561	C-CERAMIC,MLC-RADIAL;0.68NF,5%,50V,C0G,T	
....4 CZ114	2202-000561	C-CERAMIC,MLC-RADIAL;0.68NF,5%,50V,C0G,T	
....4 C701	2401-000183	C-AL;1000uF,20%,35V,WT,TP,12.5x25,5	
....4 C701	2401-000183	C-AL;1000uF,20%,35V,WT,TP,12.5x25,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 C701	2401-000962	C-AL;22uF,20%,50V,GP,TP,5x11,5	
....4 LZ112	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
....4 LZ111	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
....4 LZ110	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
....4 LZ109	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
....4 LZ108	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
....4 LZ107	2701-000142	INDUCTOR-AXIAL;1uH,10%,2.5x3.4mm	
....4 FD102S	3601-001065	FUSE-AXIAL LEAD;125V,3.5A,FAST-ACTING,CE	
....4 FD101S	3601-001065	FUSE-AXIAL LEAD;125V,3.5A,FAST-ACTING,CE	
....4 ELZ01	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 ELZ02	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 ELZ03	6042-000002	EYELET;ID1.5,OD2,L2.8,NI+SN,BSP3-1/2H	S.N.A
....4 C689	2202-000825	C-CERAMIC,MLC-AXIAL;680pF,10%,50V,Y5P,TP	
....4 C689	2202-000825	C-CERAMIC,MLC-AXIAL;680pF,10%,50V,Y5P,TP	
....4 C689	2202-000825	C-CERAMIC,MLC-AXIAL;680pF,10%,50V,Y5P,TP	
....4 C689	2202-000825	C-CERAMIC,MLC-AXIAL;680pF,10%,50V,Y5P,TP	
....4 C689	2202-000825	C-CERAMIC,MLC-AXIAL;680pF,10%,50V,Y5P,TP	
....4 C689	2202-000863	C-CERAMIC,MLC-AXIAL;560pF,10%,50V,Y5P,TP	
....4 C689	2202-000863	C-CERAMIC,MLC-AXIAL;560pF,10%,50V,Y5P,TP	
....4 C689	2202-000863	C-CERAMIC,MLC-AXIAL;560pF,10%,50V,Y5P,TP	
....4 C689	2202-000863	C-CERAMIC,MLC-AXIAL;560pF,10%,50V,Y5P,TP	
....4 C689	2202-000863	C-CERAMIC,MLC-AXIAL;560pF,10%,50V,Y5P,TP	
....4 C689	2202-000863	C-CERAMIC,MLC-AXIAL;560pF,10%,50V,Y5P,TP	
....4 R125	2001-000800	R-CARBON;5.1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
....4 0	AA41-00601C	PCB;HCM4215W,PCB,CEM-1,1L,C,1.6,245X245,	S.N.A
....4 SGZ101	4715-000106	SURGE ABSORBER;300V,210-390V,-,-,AXIAL	S.N.A
...3 T0076	BP39-00015A	LEAD CONNECTOR-ASSY;P55A/HCM4215W,UL1185	
...3	BP61-00076A	HOLDER-PUSH,A;42W5,NYLON6.6,NATURAL	S.N.A
...3	BP61-00077A	HOLDER-PUSH,B;42W5,NYLON6.6,NATURAL	S.N.A
...3 CZ101	BP96-00005A	ASSY HEAT SINK P;BP62-00002A,SCREW,STK39	S.N.A
....4 T0081	6003-001021	SCREW-TAPTITE;RH,+,B,M3,L15,ZPC(YEL),SWR	S.N.A
....4 CIS	BP62-00002A	HEAT SINK;COMMANDO,A1050P,T2.0,W62.0,H14	S.N.A
....4 CIS	BP62-00008A	HEAT SINK;COMMANDO CG AMP,AL6063,T2.0,W1	S.N.A
....4 CIS	BP73-00002A	SILICON/RUBBER;COMMANDO CG AMP,SILICON ,	S.N.A

Loc. No.	Code No.	Description ; Specification	Remark
....4 T0074	1201-001225	IC-VIDEO AMP;392,SIP,22P,-,TRIPLE,-,PLAS	
...3 CNW01	BP39-00005B	LEAD CONNECTOR;HCM4727,UL2547#26,UL/CSA,	S.N.A
..2 T0096	BP95-00075A	ASSY SUB-DVI;DP,HCM4215WJX/XAA,P55A,DVI	
...3	0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3 Q409	0505-000109	FET-SILICON;2N7000,N,60V,200mA,5ohm,400m	
...3 Q409	0505-000109	FET-SILICON;2N7000,N,60V,200mA,5ohm,400m	
...3 DX301	2801-001385	CRYSTAL-UNIT;14.31818MHz,30ppm,28-AAA,16	
...3 DX701	2801-001385	CRYSTAL-UNIT;14.31818MHz,30ppm,28-AAA,16	
...3 CN906	3711-002643	CONNECTOR-HEADER;BOX,4P,1R,2.5mm,STRAIGH	
...3	AA69-01396B	BAG PE;SKD CHASSIS,LDPE,T0.03,130,130,NO	S.N.A
...3	BP97-00166A	ASSY SMD;HCM4215WJX/XAA,DVI-AUTO,P55A	S.N.A
....4 DD512	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4 DD511	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4 DD510	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4 DD509	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4 DD513	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4 DD514	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4 DD515	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4 DD516	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4 DD501	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4 DD502	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4 DD503	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4 DD504	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4 DD508	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4 DD507	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4 DD506	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4 DD505	0401-000133	DIODE-SWITCHING;RLS4148,100V,200MA,SOD-8	
....4 DD901	0401-000160	DIODE-SWITCHING;ISS314,30V,100mA,USC,TP	
....4 DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
....4 DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
....4 DZ016	0403-001016	DIODE-ZENER;RLZ6.2B,5.96-6.27V,500MW,LL-	
....4 IC104	0801-002345	IC-CMOS LOGIC;7S04,INVERTER,SOT-353,5P,4	
....4 IC01	1002-001333	IC-A/D&D/A CONVERTER;GM7030,10BIT,PQFP,1	
....4 IC112	1103-000180	IC-EEPROM;24C16,2Kx8Bit,SOP,8P,150MIL,10	
....4 T0123	1203-001419	IC-VOLTAGE REGULATOR;4931,TO-252,3P,6.6x	
....4 IC05	1203-001824	IC-VOL. DETECTOR;7042,SOT-89,3P,-,PLASTI	
....4 T0123	1203-002351	IC-VOLTAGE REGULATOR;LF25C,DPAK,3P,240MI	
....4 DR514	2007-000071	R-CHIP;22ohm,5%,1/10W,TP,1608	
....4 DR515	2007-000071	R-CHIP;22ohm,5%,1/10W,TP,1608	
....4 DR516	2007-000071	R-CHIP;22ohm,5%,1/10W,TP,1608	
....4 DR517	2007-000071	R-CHIP;22ohm,5%,1/10W,TP,1608	
....4 DR501	2007-000071	R-CHIP;22ohm,5%,1/10W,TP,1608	
....4 DR502	2007-000071	R-CHIP;22ohm,5%,1/10W,TP,1608	
....4 DR504	2007-000071	R-CHIP;22ohm,5%,1/10W,TP,1608	
....4 DR506	2007-000071	R-CHIP;22ohm,5%,1/10W,TP,1608	
....4 DR513	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
....4 DR512	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
....4 DR510	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	
....4 DR109	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	
....4 DR301	2007-000079	R-CHIP;1.8Kohm,5%,1/10W,TP,1608	
....4 DR901	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
....4 DR519	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
....4 DR518	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
....4 DR511	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
....4 DR508	2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	
....4 DR701	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
....4 DR520	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
....4 DR509	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
....4 DR210	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
....4 DR702	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
....4 DR703	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
....4 DR704	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
....4 DR706	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
....4 DR707	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
....4 DR201	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
....4 DR202	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
....4 DR203	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
....4 DR204	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
....4 DR205	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
....4 DR209	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
....4 DR208	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
....4 DR207	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
....4 DR206	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	
....4 DR902	2007-000102	R-CHIP;100Kohm,5%,1/10W,TP,1608	
....4 C120	2203-000041	C-CERAMIC,CHIP;0.01NF,0.25PF,50V,C0G,TP,	
....4 C120	2203-000041	C-CERAMIC,CHIP;0.01NF,0.25PF,50V,C0G,TP,	
....4 C120	2203-000041	C-CERAMIC,CHIP;0.01NF,0.25PF,50V,C0G,TP,	

Loc. No.	Code No.	Description ; Specification	Remark
....4 C120	2203-000041	C-CERAMIC,CHIP;0.01NF,0.25PF,50V,C0G,TP,	
....4 C120	2203-000181	C-CERAMIC,CHIP;100nF,+80-20%,25V,Y5V

Loc. No.		Code No.	Description ; Specification	Remark
....4	DR708	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	
....4	DR503	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
....4	DR505	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
....4	DR507	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
....4	DR521	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
....4	DR522	2007-001167	R-CHIP;75ohm,5%,1/10W,TP,1608	
....4	0	AA41-00793B	PCB;HCN473,PCB-DVI,2L,1.6T,245*180,P55A,	S.N.A
....4		0202-001167	SOLDER-CREAM;RX3603-2330HO,S45A,PASTE,SN	S.N.A
...3	CN906	3711-003641	CONNECTOR-HEADER;BOX,12P,1R,2.5mm,STRAIG	
...3	T0121	3301-001201	CORE-FERRITE;AE,21x11x32mm,1500,280G	
...3		AA63-10002A	BAND-TIE;NYLON66 V2,L100,NTR	S.N.A
...3	IC112	1103-001211	IC-EEPROM;24C16-PC27 C,2048x8Bit,DIP,8P,	
...3	T0076	AA39-20032B	LEAD CONNECTOR-ASSY;,12P,300,67096-012,S	
...3	PL1	3701-001173	CONNECTOR-DSUB;24P,3R,FEMALE,ANGLE,AUF	
..2		BP95-00147D	ASSY SUB PCB-SENSOR;DP,P54A,SENSOR	
...3		0202-000187	SOLDER-WIRE FLUX;-,RS60S,D1.2,63Sn/37Pb	S.N.A
...3		AA69-01808B	BAG-SHEET;,LDPE(ANTISTATIC),T0.05,800,50	S.N.A
...3		BP97-00208A	ASSY SMD;0	S.N.A
....4	Q01	0501-000342	TR-SMALL SIGNAL;KSC1623-Y,NPN,200mW,SOT-	
....4	PCB	AA41-00853A	PCB-SERSOR;SVP-42W5HRC,FR-4,2L,A,1.6T,24	S.N.A
....4	D01	BP32-00001A	SENSOR PHOTO;BCS5030G1,-40 TO +85,0.42 U	
....4	R01	2007-000305	R-CHIP;10Mohm,5%,1/10W,TP,1608	
....4	R02	2007-000109	R-CHIP;1Mohm,5%,1/10W,TP,1608	
....4	R03	2007-000109	R-CHIP;1Mohm,5%,1/10W,TP,1608	
....4		0202-001167	SOLDER-CREAM;RX3603-2330HO,S45A,PASTE,SN	S.N.A
...3	CN906	3711-000447	CONNECTOR-HEADER;BOX,3P,1R,2.5MM,ANGLE,-	

ASSY ACCESSORY

1	M0016	BP92-00577B	ASSY ACCESSORY;HCN4727WSC/XAA,P55A	S.N.A
..2		6902-000018	BAG PE;LDPE,T0.1,W280,L400,GRY,8,2-	S.N.A
..2	T0116	AA39-00006A	CABLE RCA;,3000MM	
..2	T0074	AA59-00262A	REMOCON;,TM63,COMMONDO,48,G6671B,EX,S/S	
...3	T0122	2802-000194	RESONATOR-CERAMIC;8MHz,1.0%,TP,8.5x4.5x5	
...3	T0119	AA09-00275A	IC MICOM;Z86L8808SSC-R51PX,SOP,ST,SZTM-8	
..2	T0113	AA61-20126A	HOLDER-LEG;-,ABS,-,-,-,BLK,HB	
..2		AA68-00371C	CARD WARRANTY-01;,SEA,W/P100(G),1 YEAR	S.N.A
..2		AA68-40065B	CARD-REGISTRATION;,SEA,A5,ENG,A/P220,2P(	S.N.A
..2		AA69-30009C	BAG-SHEET;LDPE,T0.08,W150,L120,-,-,-	S.N.A
..2	CIS	BP68-00054A	MANUAL USERS;HCM473WJX,ENG,W/P100G,P55A,	

ASSY K/D-CRT

1		BP98-00173A	ASSY K/D-CRT ASSY;HCN4727WSC/XAA,P55A	S.N.A
..2	T0026	BP98-00174A	ASSY K/D-CRT R;HCN4727WSC/XAA,P55A	
...3		AA03-00200A	CRT MONO;P16LSG03RJA,FREE,3.30mH,2.20mH,	S.N.A
...3	T0117	AA26-30006F	TRANS FBT-ANODE CAP ASS'Y;-,FWZ-50A001C,	
...3	T0078	AA27-00249A	DEFLECTION YOKE;-,DPD-5292AA,S/S,7,29.1	
...3	T0079	AA33-00016A	MAGNET CONVERGENCE;JH 92LT - 29F,-,29.1M	
...3	T0076	AA39-00018A	LEAD CONNECTOR-ASSY;,UL1015#22,UL/CSA,1P	
...3		AA60-00125B	SPACER-CRT;PROJ,SILICONE,D/GRAY	S.N.A
...3		AA60-00126B	SPACER-CAP;PROJ,EPDM,BLK	S.N.A
...3		AA60-00127B	SPACER-LENS;PROJ,SILICONE,D/GRAY	S.N.A
...3	T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
...3		AA61-00056B	BRACKET-LENS;PROJECTION,SECC,T1.6,-,-,-,	S.N.A
...3		AA61-00809B	HOLDER-CRT;PROJ,PC/ABS GF 20%,BLK	S.N.A
...3	T0114	AA61-00810B	HOLDER-CAP;PROJ,PC,CLR	
...3		AA63-00076A	SPACER-LENS;PROJECTION,FELT ,-,-,-,BROWN	S.N.A
...3	T0109	AA67-00147A	LENS-ASSY;,DELTA 78,CLEAR A/B	
...3	T0051	AA67-10008A	LENS;-,DELTA,RED,PJT,-,77,79,-	
...3		BP61-00079A	HOLDER-DY;,PJTV,T0.5,NYLON66 V2	S.N.A
...3		AA61-00845A	CASE-COUPLER,R;DP,PROJ,AA61-00806B	S.N.A
....4		AA61-00806B	CASE-COUPLER,R;PROJ,ALDC,T8,BLK	S.N.A
....4		AA63-10007C	BAND-PP;W18,CLEA,1G	S.N.A
...3	T0107	AA91-00735A	ASSY-BRKT,CRT;DP,AA91-00722A,PROJ	
....4	T0107	AA91-00722A	ASSY-BRKT,CRT;,SECC T1.6,PROJ	
.....5	T0072	AA61-00473B	BRACKET-CRT;53,SECC,T1.6,-,-,-,-	S.N.A
.....5		AA61-00615B	BRACKET-EARTH;54J8,PBS,T0.5,-,-,-,-	S.N.A
.....5		AA61-00812A	SPRING ETC-WIRE;PROJ,STS,3.6	S.N.A
..2	T0027	BP98-00175A	ASSY K/D-CRT G;HCN4727WSC/XAA,P55A	
...3		AA03-00201A	CRT MONO;P16LSG03HKA,FREE,3.30mH,2.20mH,	S.N.A
...3	T0117	AA26-30006F	TRANS FBT-ANODE CAP ASS'Y;-,FWZ-50A001C,	
...3	T0078	AA27-00249A	DEFLECTION YOKE;-,DPD-5292AA,S/S,7,29.1	
...3	T0076	AA39-00018A	LEAD CONNECTOR-ASSY;,UL1015#22,UL/CSA,1P	
...3		AA60-00125B	SPACER-CRT;PROJ,SILICONE,D/GRAY	S.N.A
...3		AA60-00126B	SPACER-CAP;PROJ,EPDM,BLK	S.N.A
...3		AA60-00127B	SPACER-LENS;PROJ,SILICONE,D/GRAY	S.N.A
...3	T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
...3		AA61-00056B	BRACKET-LENS;PROJECTION,SECC,T1.6,-,-,-,	S.N.A
...3		AA61-00809B	HOLDER-CRT;PROJ,PC/ABS GF 20%,BLK	S.N.A
...3	T0114	AA61-00810B	HOLDER-CAP;PROJ,PC,CLR	
...3		AA63-00076A	SPACER-LENS;PROJECTION,FELT ,-,-,-,BROWN	S.N.A
...3	T0109	AA67-00147A	LENS-ASSY;,DELTA 78,CLEAR A/B	
...3	T0051	AA67-10071A	LENS;DELTA 77 79,-,GREEN,C ELEMENT,	
...3		BP61-00079A	HOLDER-DY;,PJTV,T0.5,NYLON66 V2	S.N.A
...3	T0107	AA91-00735A	ASSY-BRKT,CRT;DP,AA91-00722A,PROJ	
....4	T0107	AA91-00722A	ASSY-BRKT,CRT;,SECC T1.6,PROJ	
.....5	T0072	AA61-00473B	BRACKET-CRT;53,SECC,T1.6,-,-,-,-	S.N.A
.....5		AA61-00615B	BRACKET-EARTH;54J8,PBS,T0.5,-,-,-,-	S.N.A
.....5		AA61-00812A	SPRING ETC-WIRE;PROJ,STS,3.6	S.N.A
...3		AA61-00846A	CASE-COUPLER,G;DP,PROJ,AA61-00807B	S.N.A
....4		AA61-00807B	CASE-COUPLER,G;PROJ,ALDC,T8,BLK	S.N.A
....4		AA63-10007C	BAND-PP;W18,CLEA,1G	S.N.A
..2	T0028	BP98-00176A	ASSY K/D-CRT B;HCN4727WSC/XAA,P55A	
...3		AA03-00202A	CRT MONO;P16LSG03BMB,FREE,3.30mH,2.20mH,	S.N.A
...3	T0117	AA26-30006F	TRANS FBT-ANODE CAP ASS'Y;-,FWZ-50A001C,	
...3	T0078	AA27-00249A	DEFLECTION YOKE;-,DPD-5292AA,S/S,7,29.1	
...3	T0079	AA33-00018A	MAGNET CONVERGENCE;JH 92LT - 36F,-,29.1M	
...3	T0076	AA39-00018A	LEAD CONNECTOR-ASSY;,UL1015#22,UL/CSA,1P	
...3		AA60-00125B	SPACER-CRT;PROJ,SILICONE,D/GRAY	S.N.A
...3		AA60-00126B	SPACER-CAP;PROJ,EPDM,BLK	S.N.A
...3		AA60-00127B	SPACER-LENS;PROJ,SILICONE,D/GRAY	S.N.A
...3	T0081	AA60-10011A	SCREW-TAPTITE;-,SWRCH18A,M4,L12,HH,+,PC,	S.N.A
...3		AA61-00056B	BRACKET-LENS;PROJECTION,SECC,T1.6,-,-,-,	S.N.A
...3		AA61-00809B	HOLDER-CRT;PROJ,PC/ABS GF 20%,BLK	S.N.A
...3	T0114	AA61-00810B	HOLDER-CAP;PROJ,PC,CLR	
...3		AA63-00076A	SPACER-LENS;PROJECTION,FELT ,-,-,-,BROWN	S.N.A
...3	T0109	AA67-00147A	LENS-ASSY;,DELTA 78,CLEAR A/B	
...3	T0051	AA67-10007A	LENS;-,DELTA,CLEAR,PJT,-,77,79,-	
...3		BP61-00079A	HOLDER-DY;,PJTV,T0.5,NYLON66 V2	S.N.A
...3	T0107	AA91-00735A	ASSY-BRKT,CRT;DP,AA91-00722A,PROJ	
....4	T0107	AA91-00722A	ASSY-BRKT,CRT;,SECC T1.6,PROJ	
.....5	T0072	AA61-00473B	BRACKET-CRT;53,SECC,T1.6,-,-,-,-	S.N.A
.....5		AA61-00615B	BRACKET-EARTH;54J8,PBS,T0.5,-,-,-,-	S.N.A
.....5		AA61-00812A	SPRING ETC-WIRE;PROJ,STS,3.6	S.N.A
...3		AA61-00847A	CASE-COUPLER,B;DP,PROJ,AA61-00808B	S.N.A
....4		AA61-00808B	CASE-COUPLER,B;PROJ,ALDC,T8,BLK	S.N.A
....4		AA63-10007C	BAND-PP;W18,CLEA,1G	S.N.A

ASSY K/D-SKD P/MATERIAL

1		AA98-01629A	ASSY K/D-SKD P/MATERIAL;SKD FORMAT-3	S.N.A
..2		AA69-00305A	BAG AIR;ALL,LDPE,1000,500,CLR,	S.N.A
..2		AA69-00306A	BAG AIR;LDPE,-,1800,1000,CLR,ASSY,ALL,-	S.N.A
..2		AA69-90001A	CHEMICALS-SILICAGEL;-,-,-,-,-,M2,5GR,-,-	S.N.A
..2		AA60-40006A	PIN-STAPLE;AUTO,33X17.8X2.4,H18,33X17.8X	S.N.A
..2	WOODEN	AA63-10007C	BAND-PP;W18,CLEA,1G	S.N.A

MEMO

8. Block Diagram

8-1 Current System

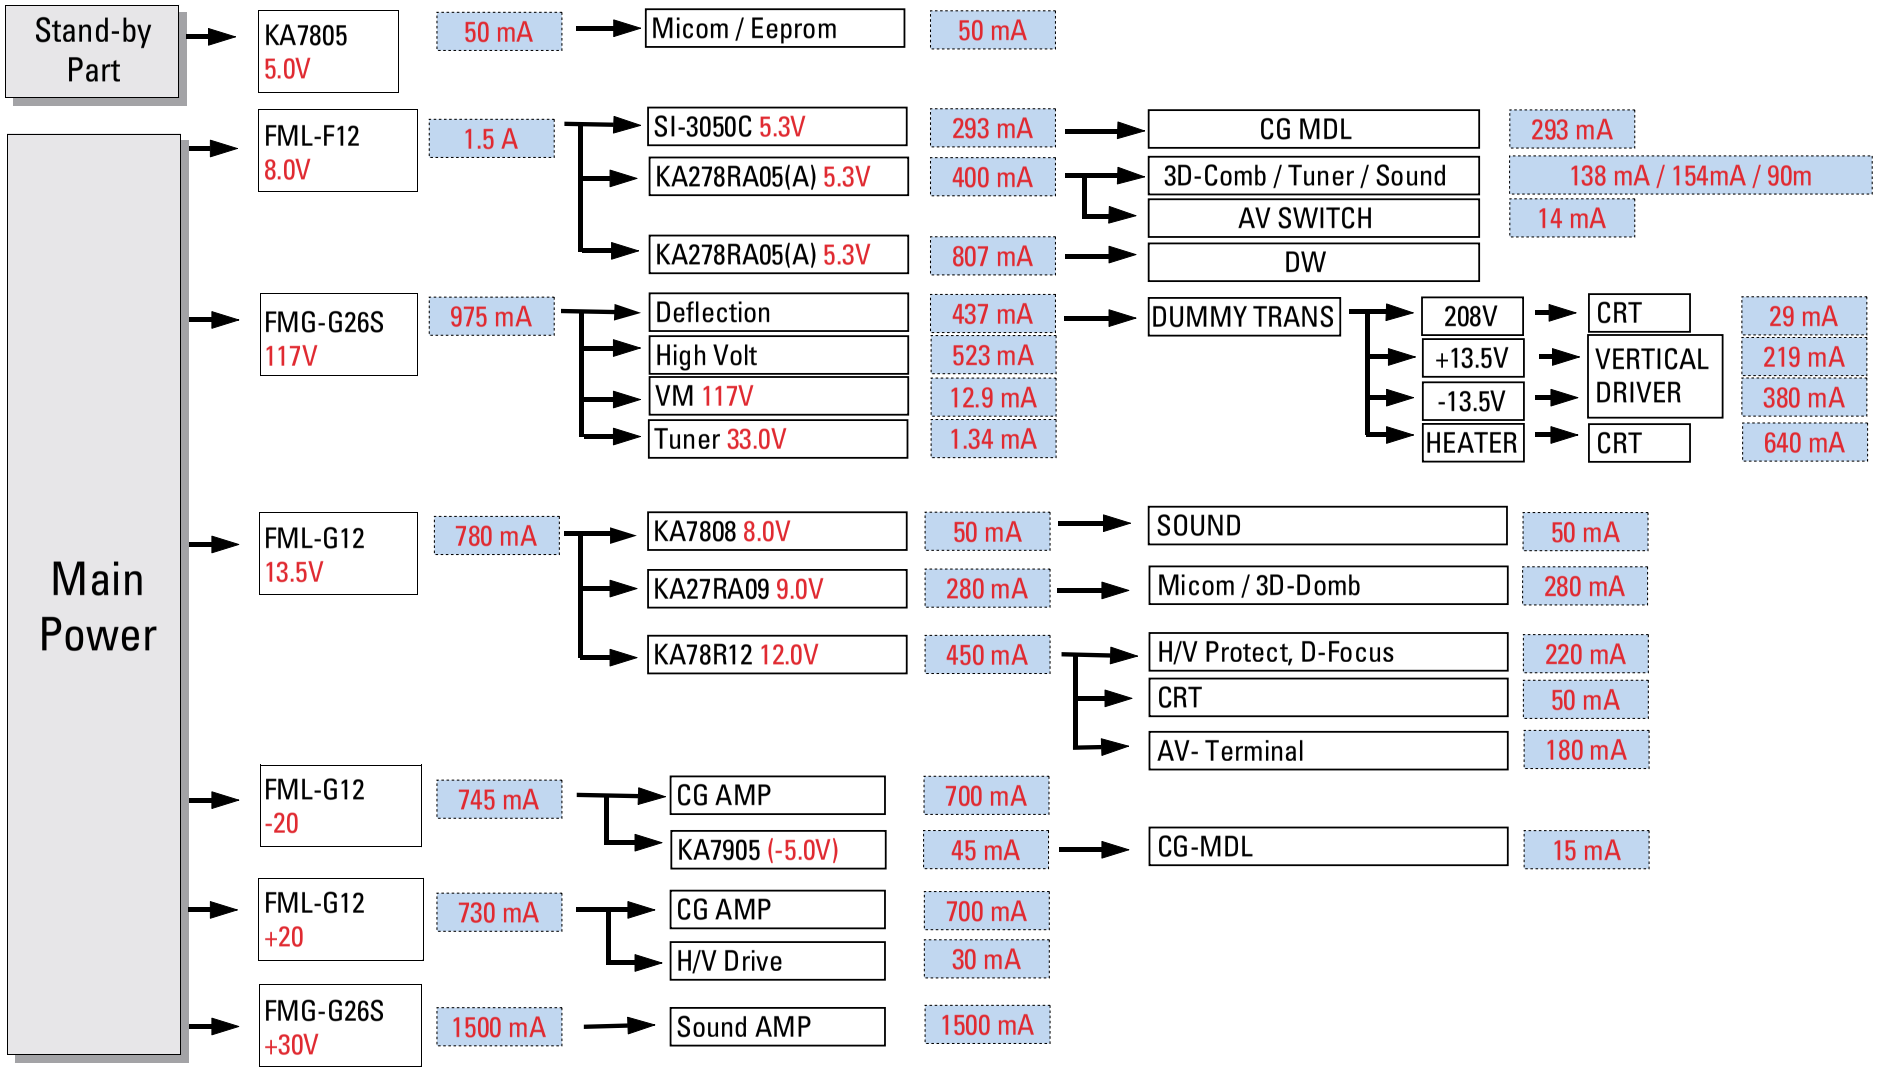

8-2 Power Supply System

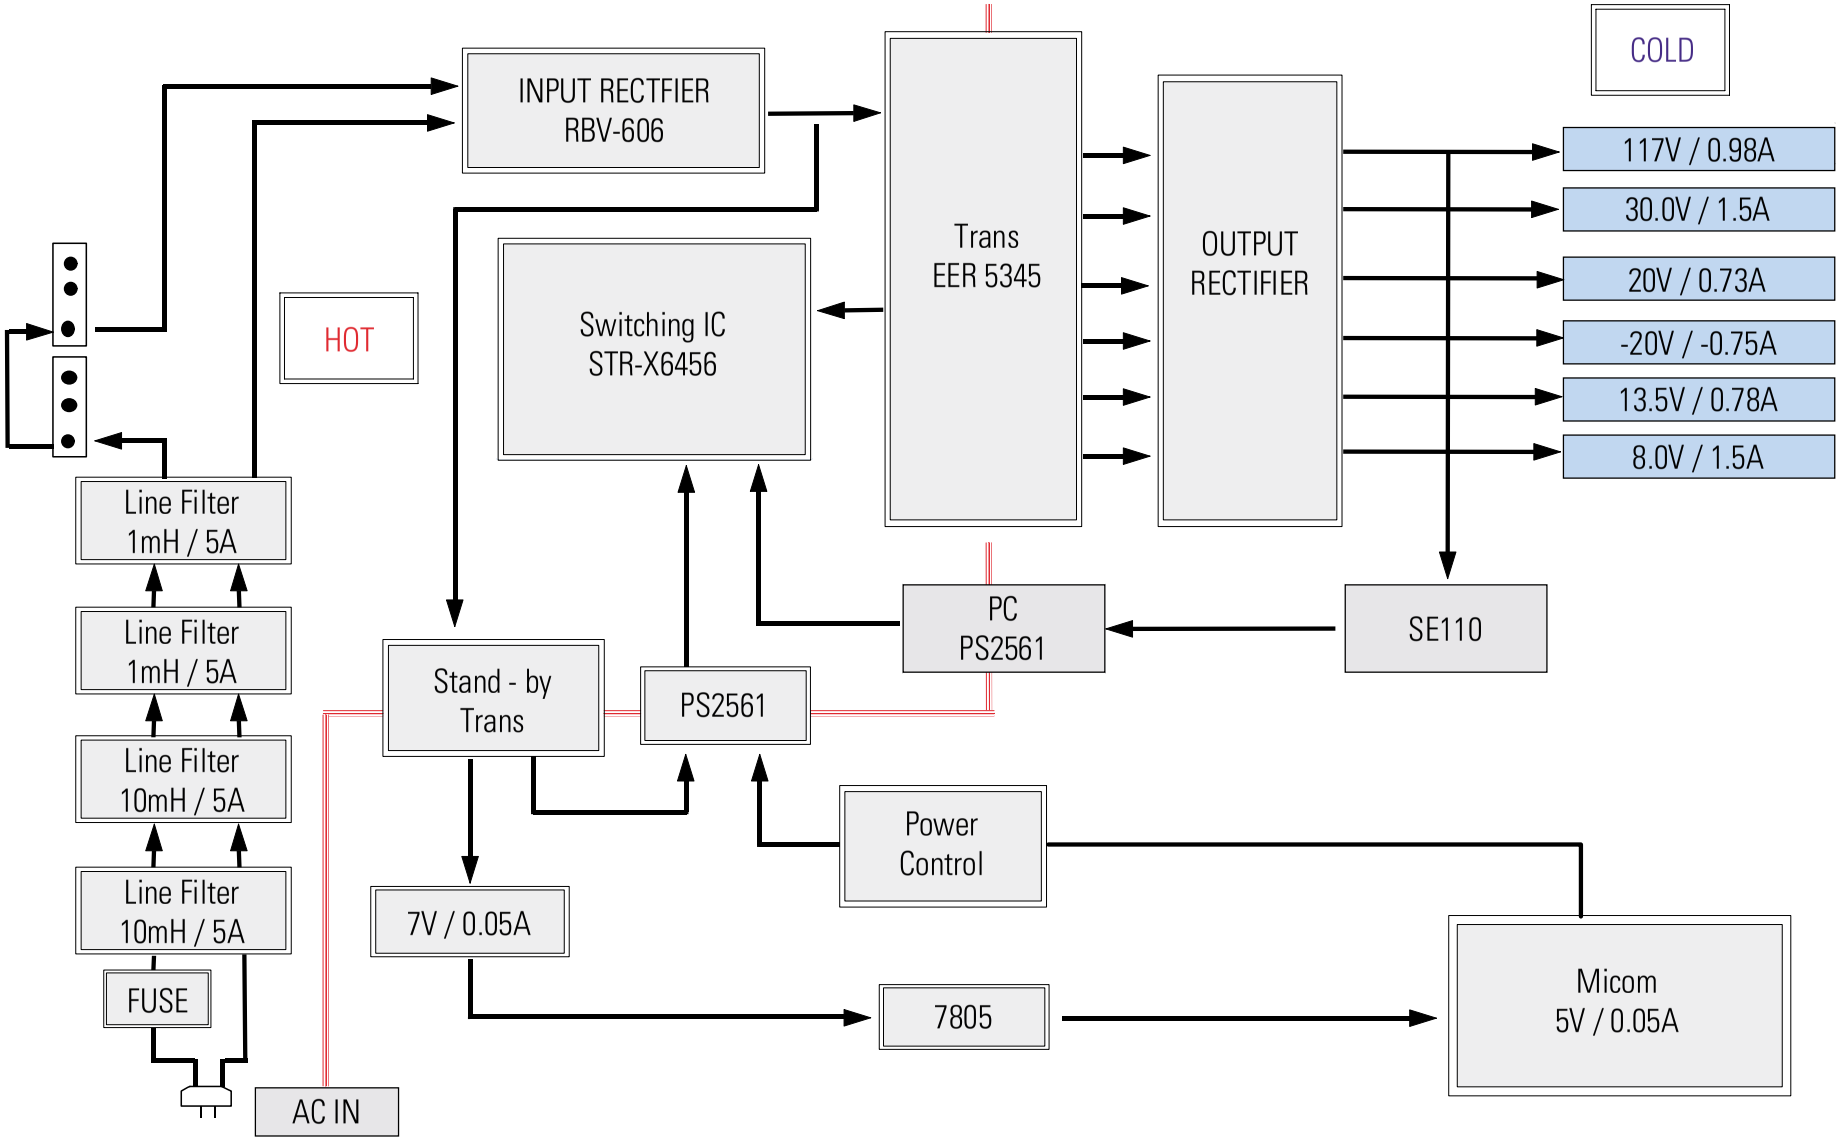

8-3 Deflection System

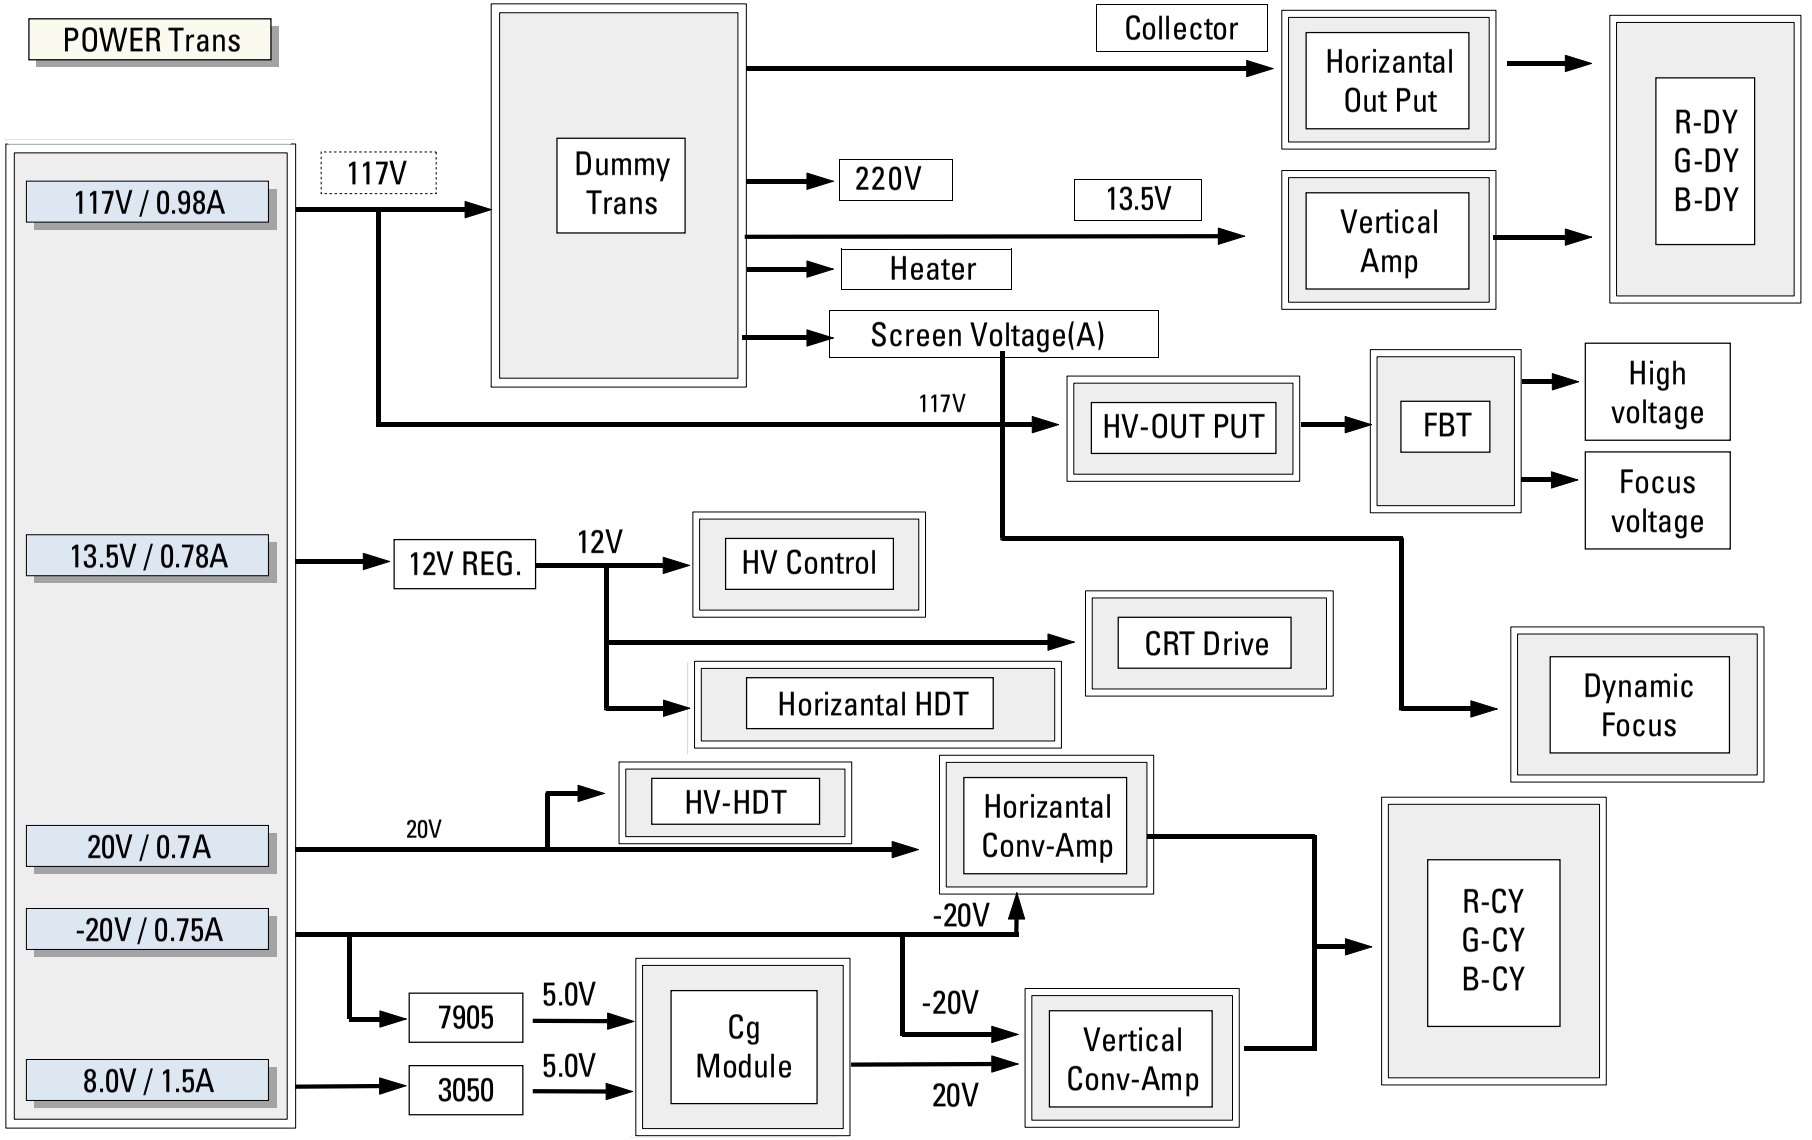

8-4 SDC Perfect Focus Block Diagram

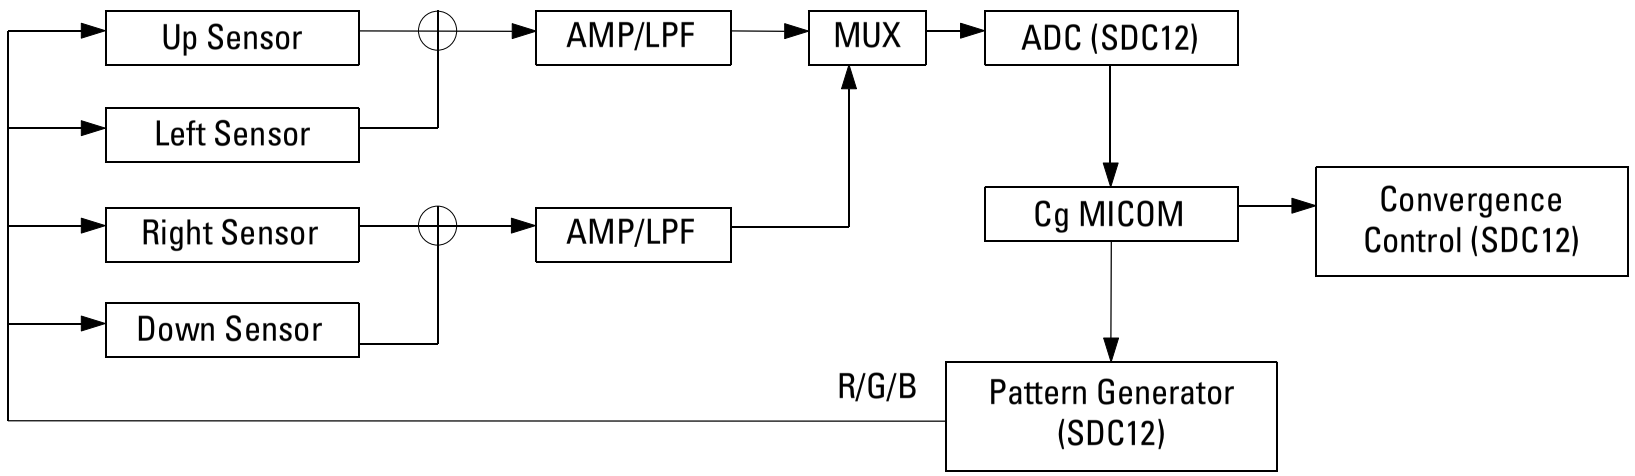

8-5 Sound Switching Block Diagram -1

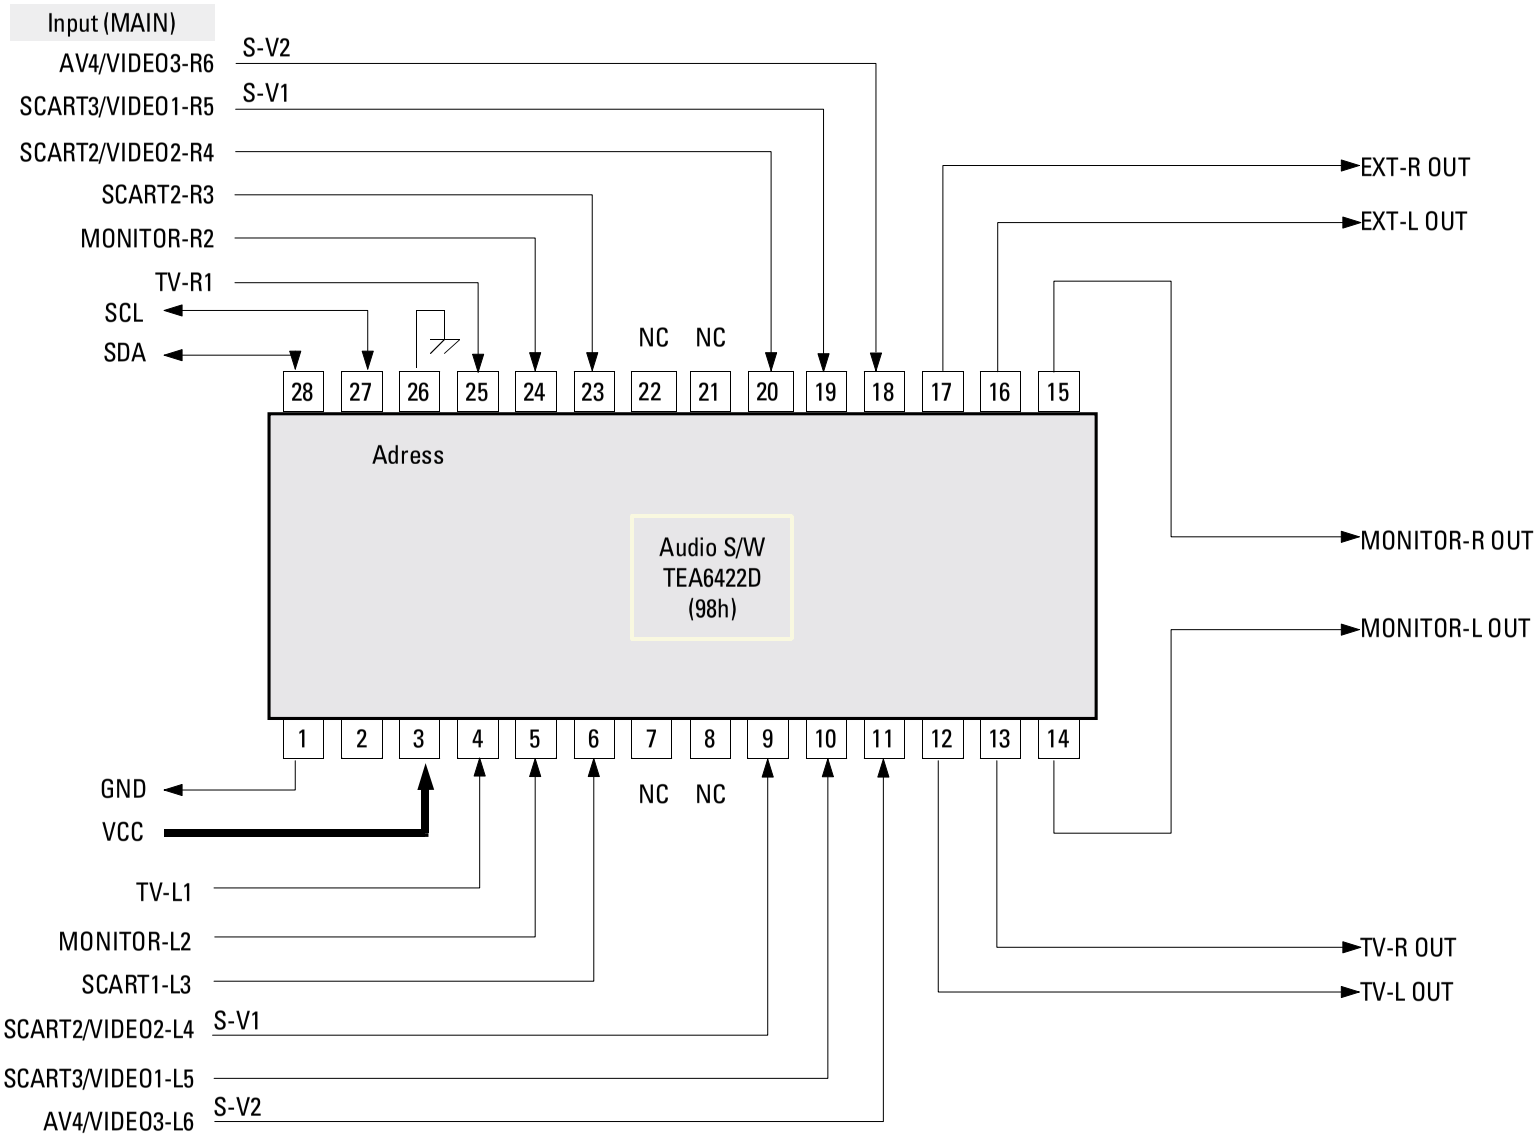

8-6 Sound Switching Block Diagram -2

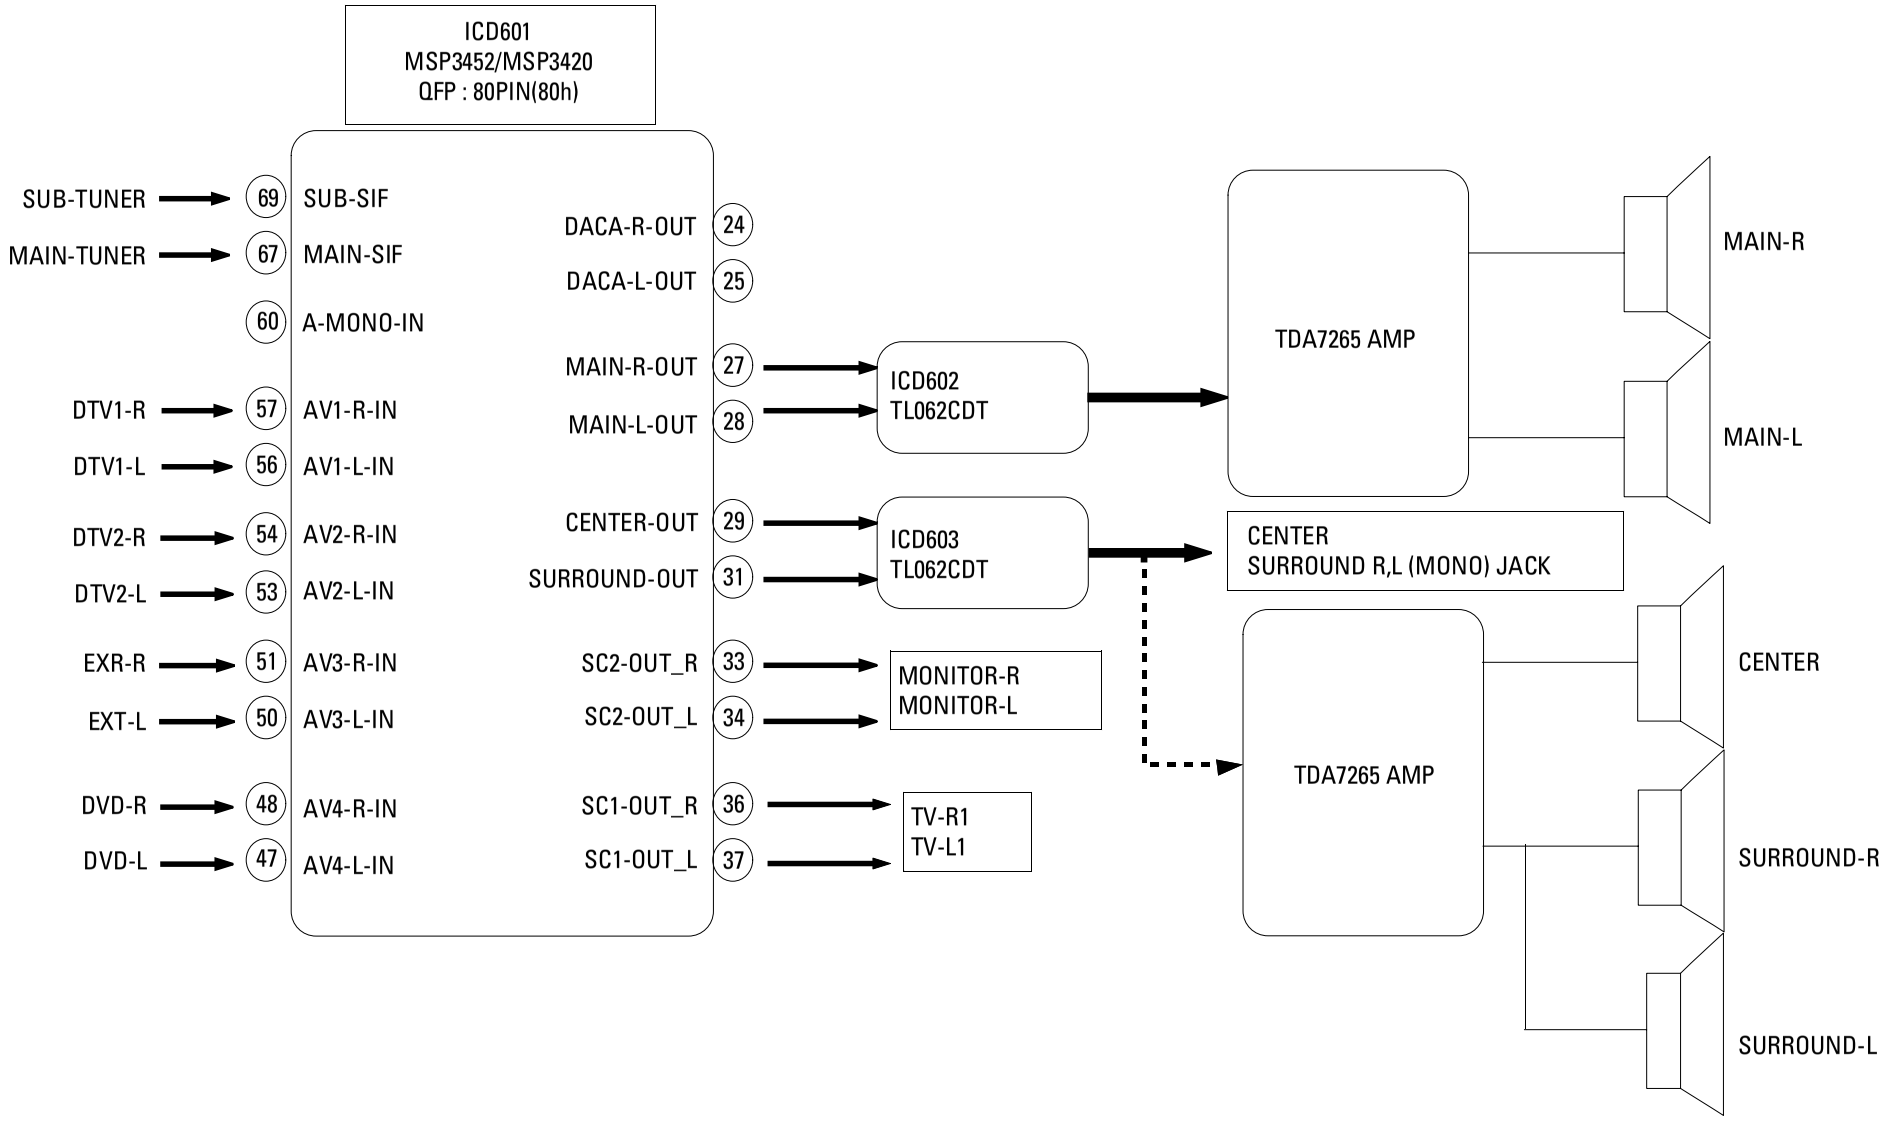

8-7 Video Signal Diagram

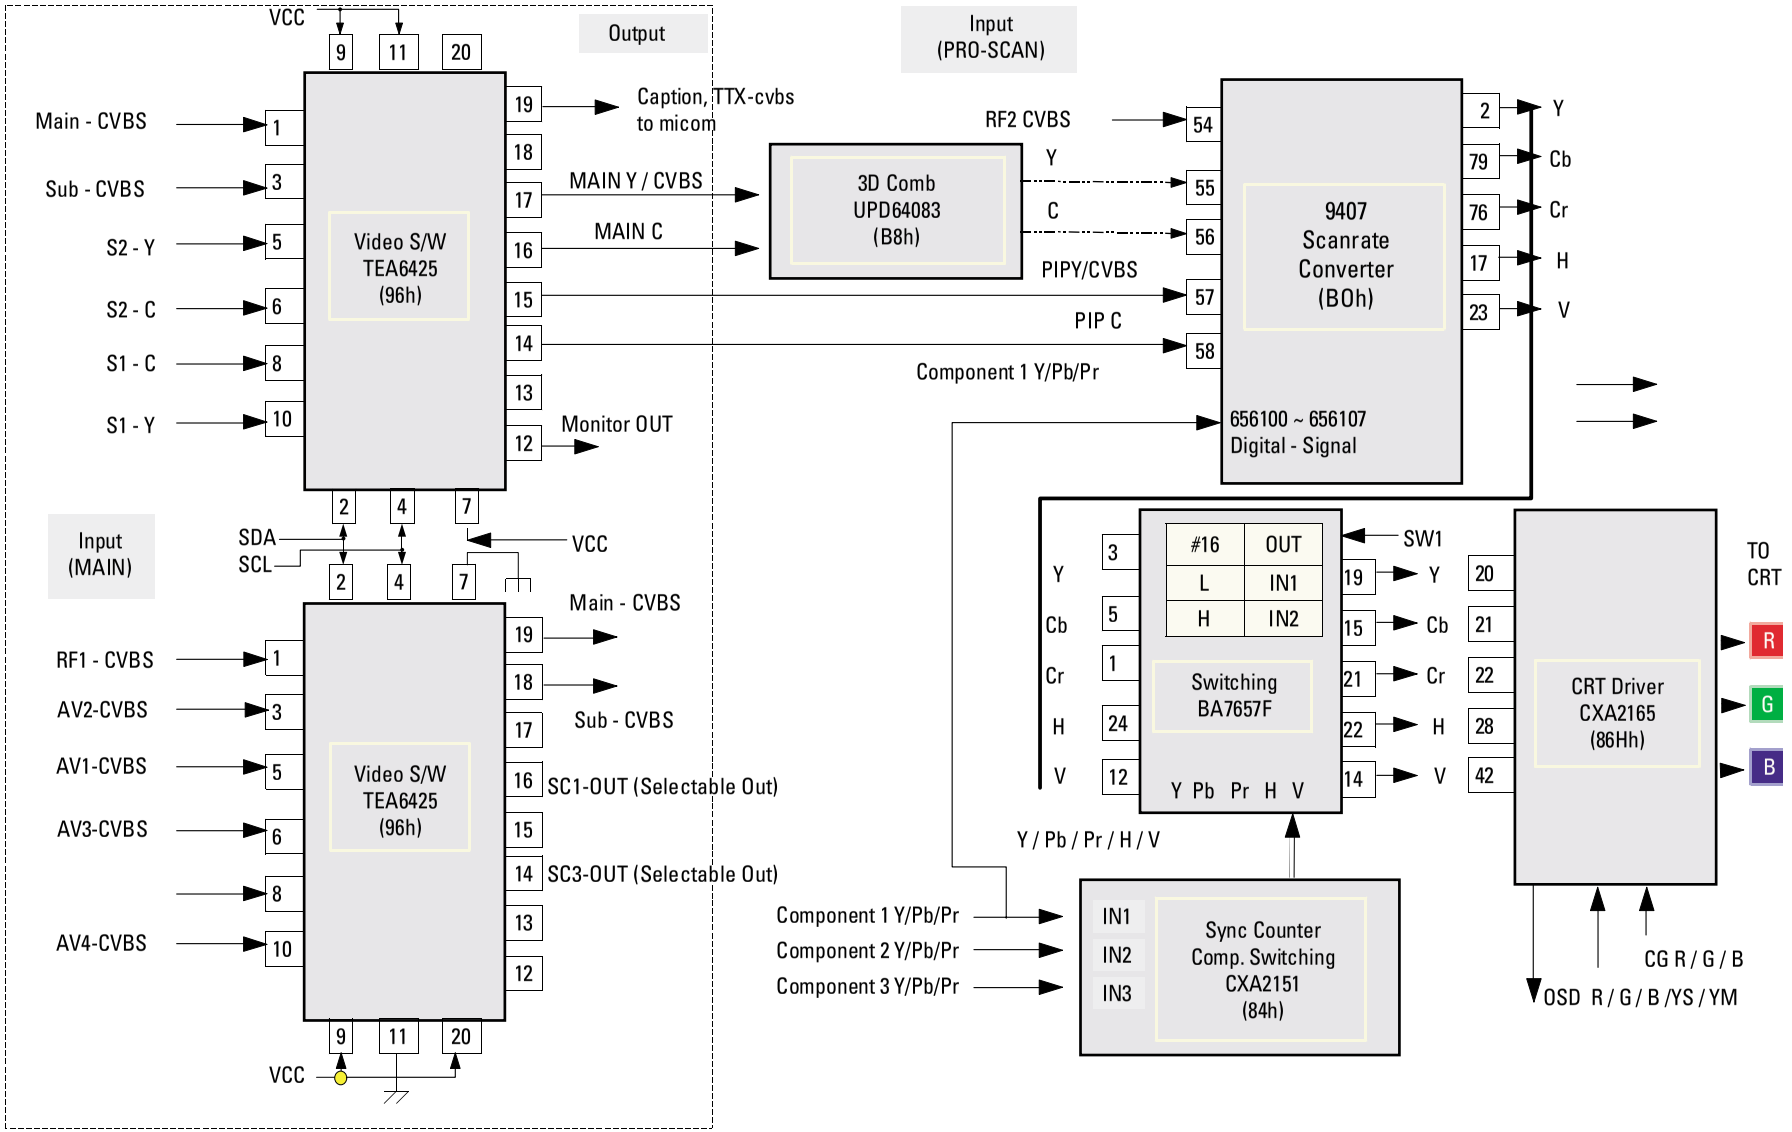

9. Wiring Diagram

9-1 Pcb Connection

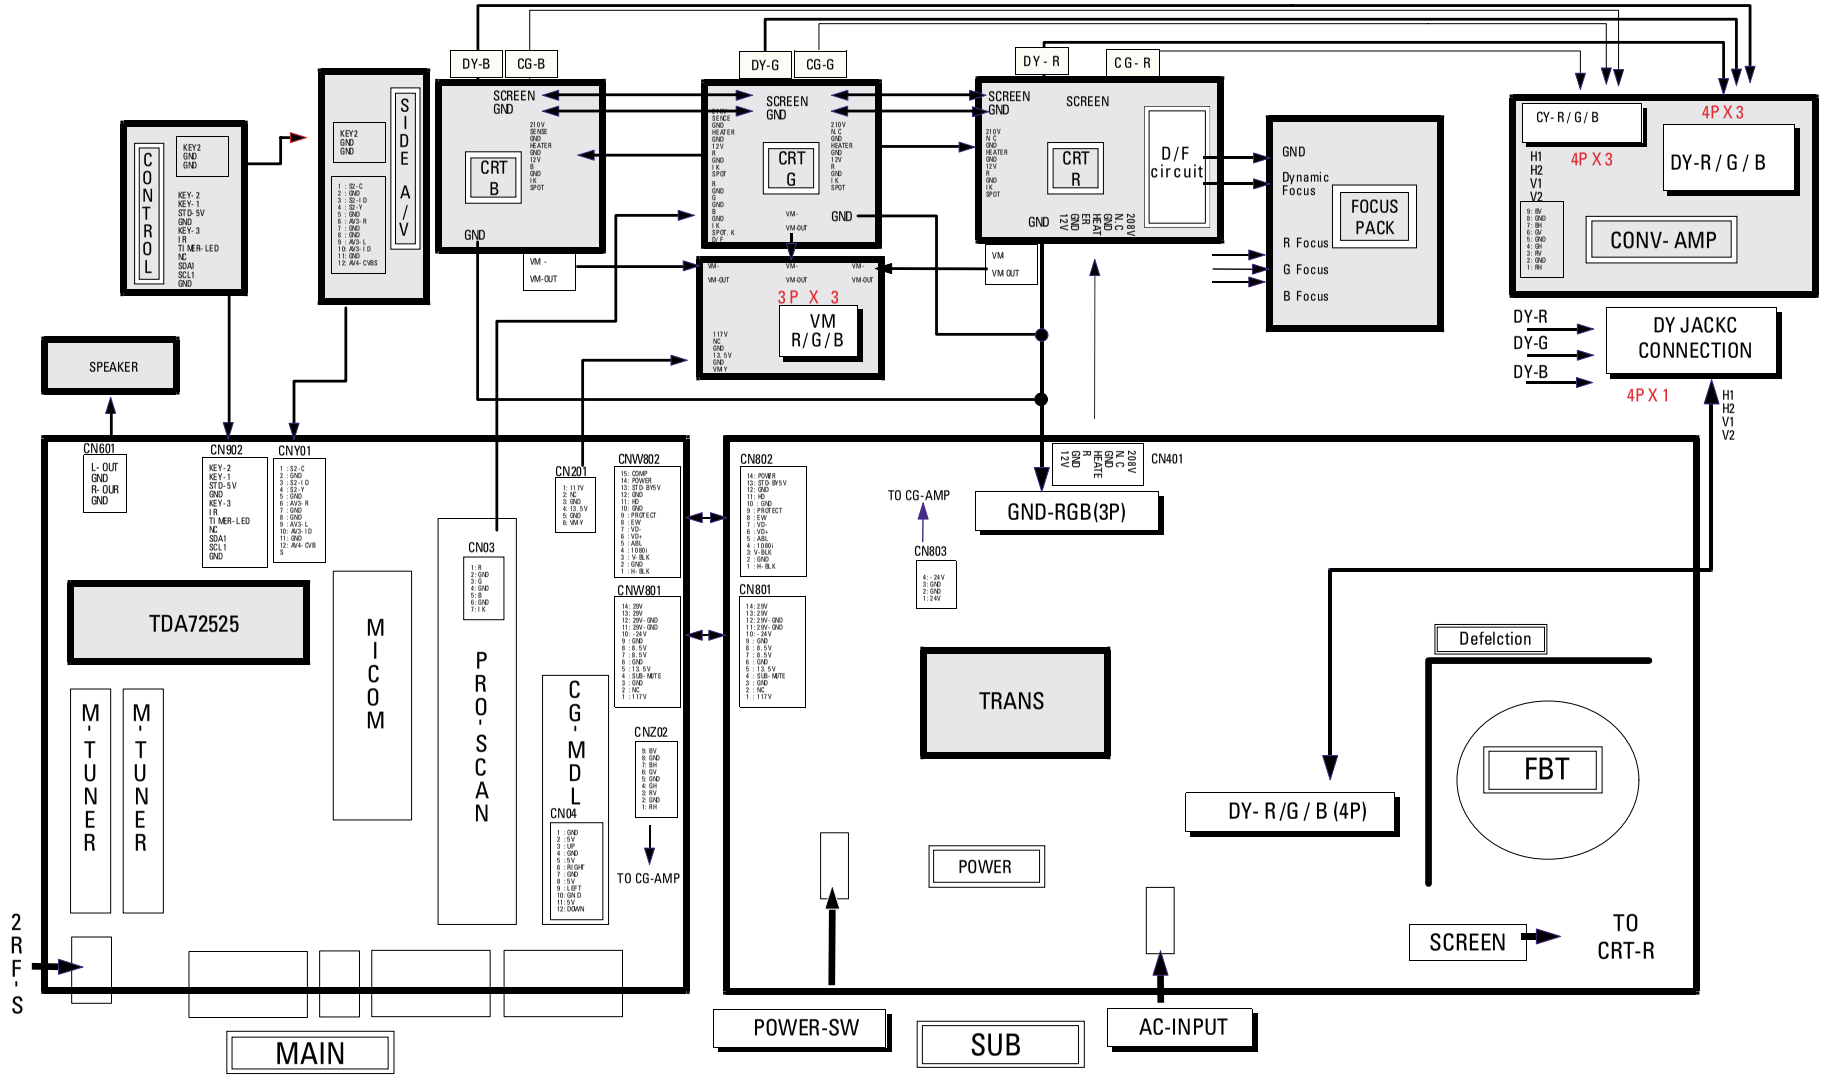

10. Schematic Diagrams

10-1 MAIN 1

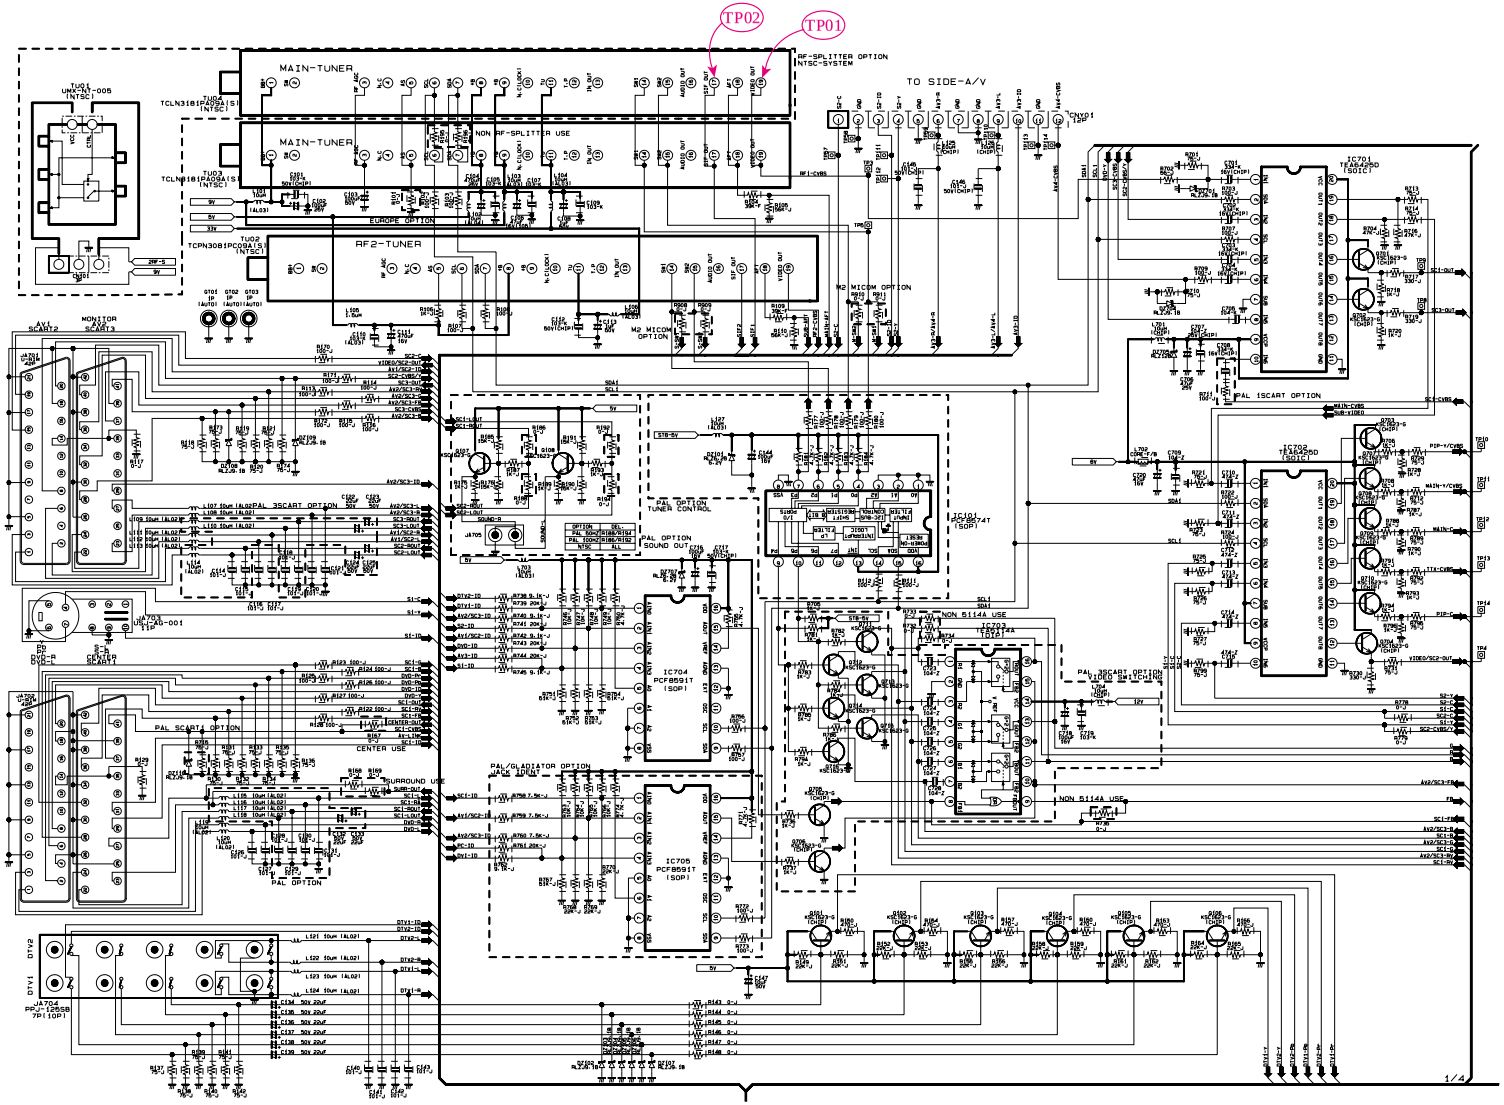

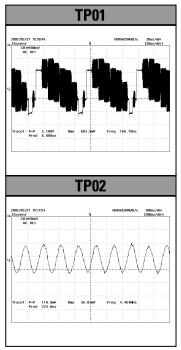

10-2 MAIN 2

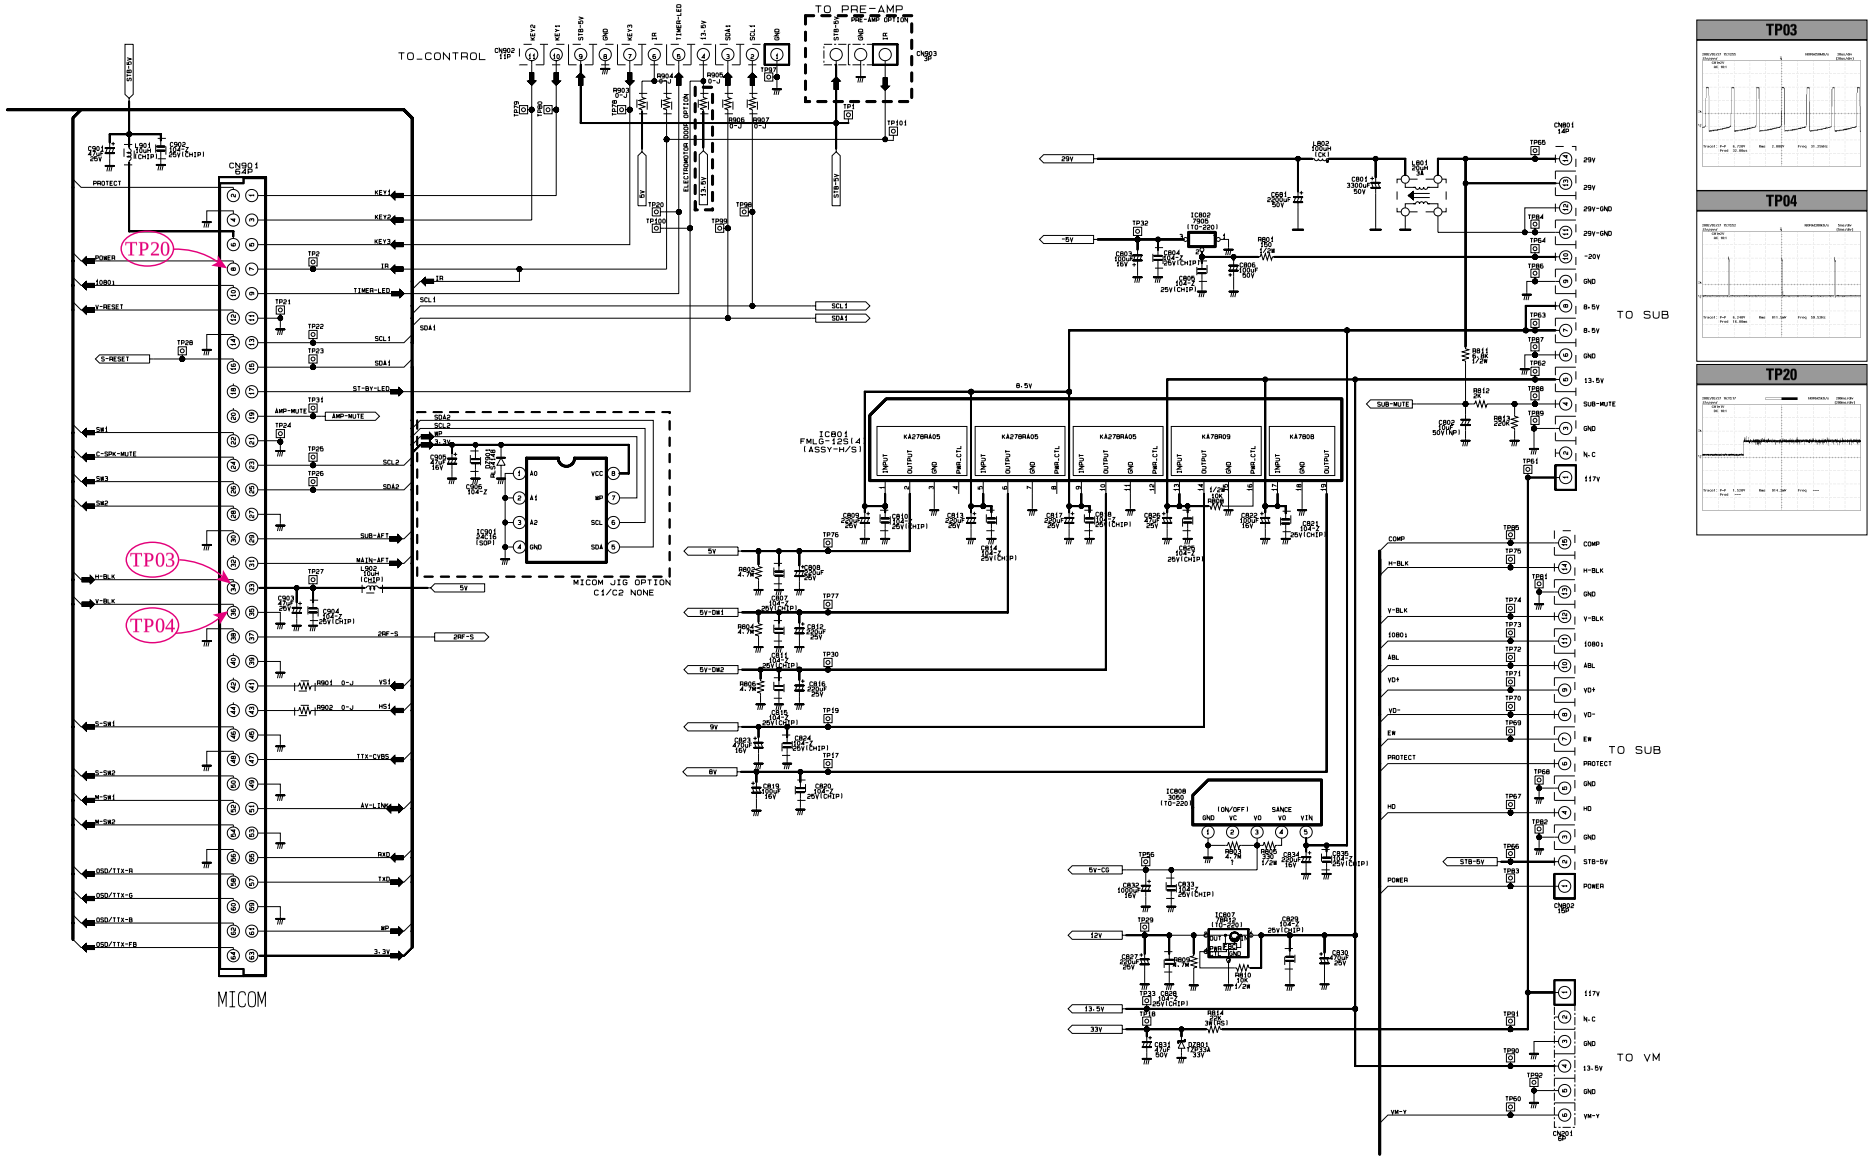
TO_CONTROL
TO_PRE-AMP
MICOM
TP20
TP03
TP04
TO SUB
TO SUB
TO VM
TP03
TP04
TP20

10-3 MAIN 3

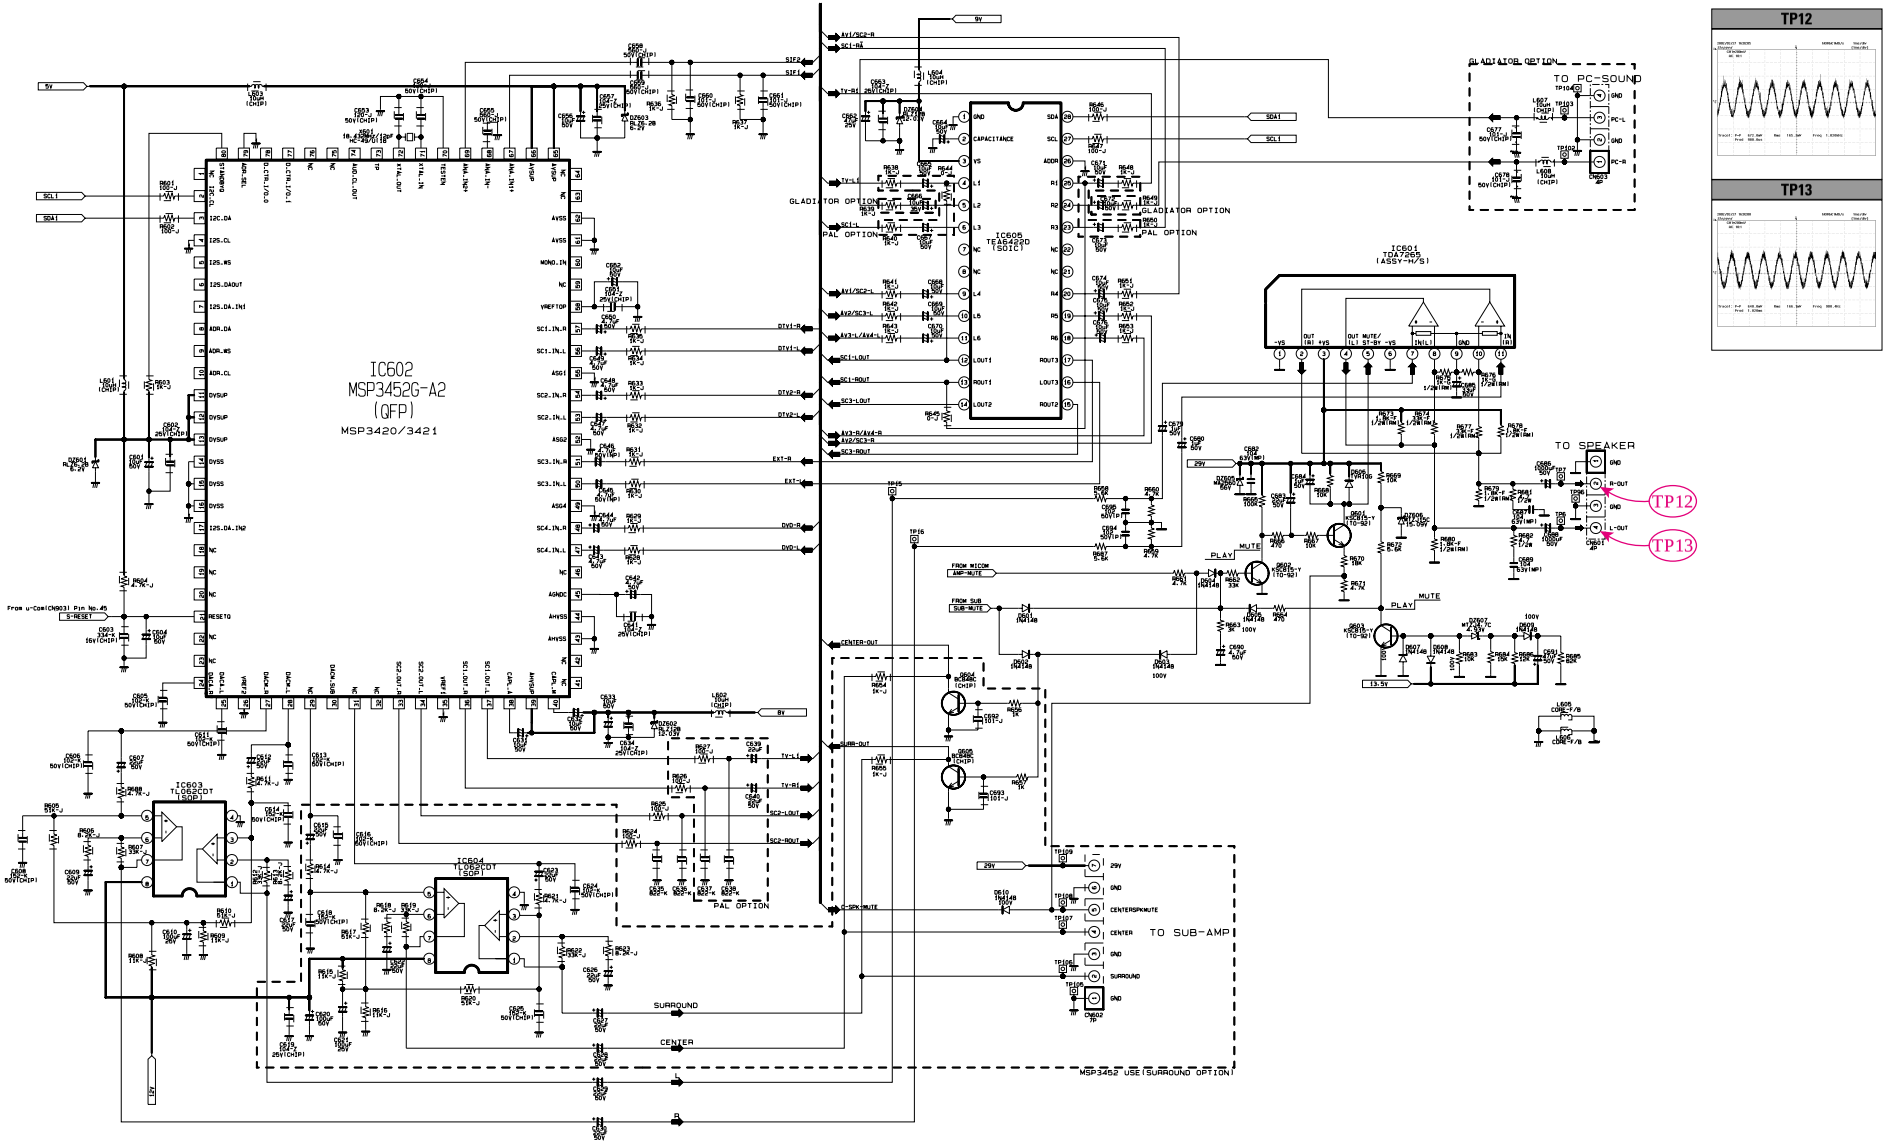
IC602
MSP3452G-A2
(QFP)
MSP3420/3421
IC605
TEA6420D
(SOIC)
IC601
TDA7265
(ASSY-M/S)
IC603
TL062CDT
(SOP)
IC604
TL062CDT
(SOP)
TO PC-SOUND
TO SPEAKER
TO SUB-AMP
PAL OPTION
GLADIATOR OPTION
MSP3452 USE(SURROUND OPTION)
SURROUND
CENTER
TP12
TP13

10-4 MAIN 4

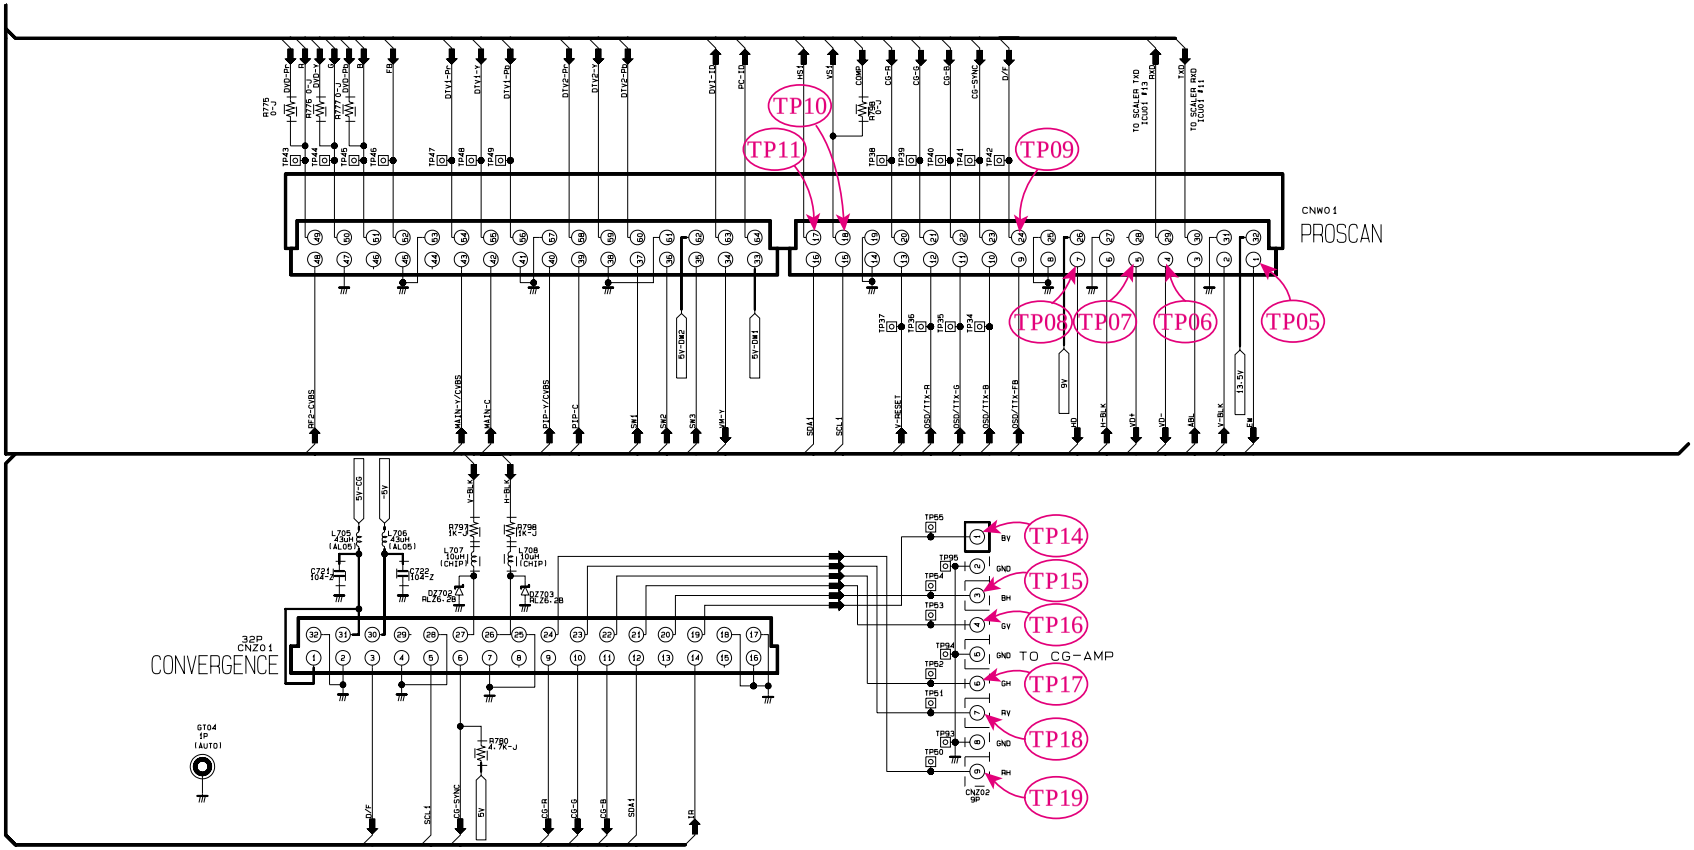
TP10
TP11
TP09
TP08
TP07
TP06
TP05
CNW01
PROSCAN
TO SCALER TXD (CG01 #13 RXD)
TO SCALER RXD (CG01 #11 TXD)
32P CNZ01
CONVERGENCE
TO CG-AMP
TP14
TP15
TP16
TP17
TP18
TP19
CNZ02 9P
GT04 1P (AUTO)

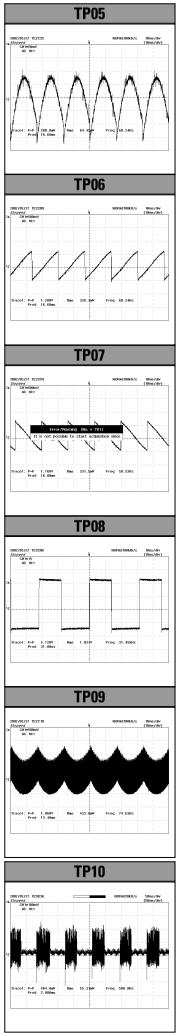
TP05
TP06
TP07
TP08
TP09
TP10

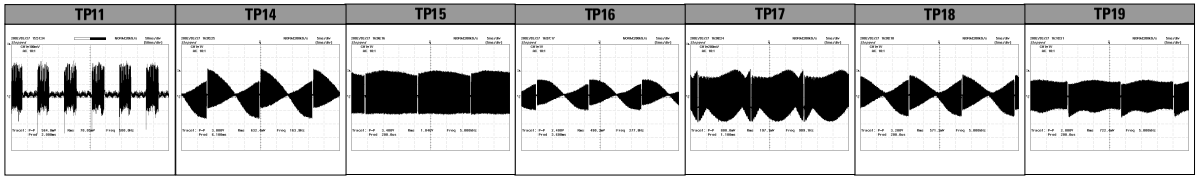
TP11
TP14
TP15
TP16
TP17
TP18
TP19

10-5 MICOM

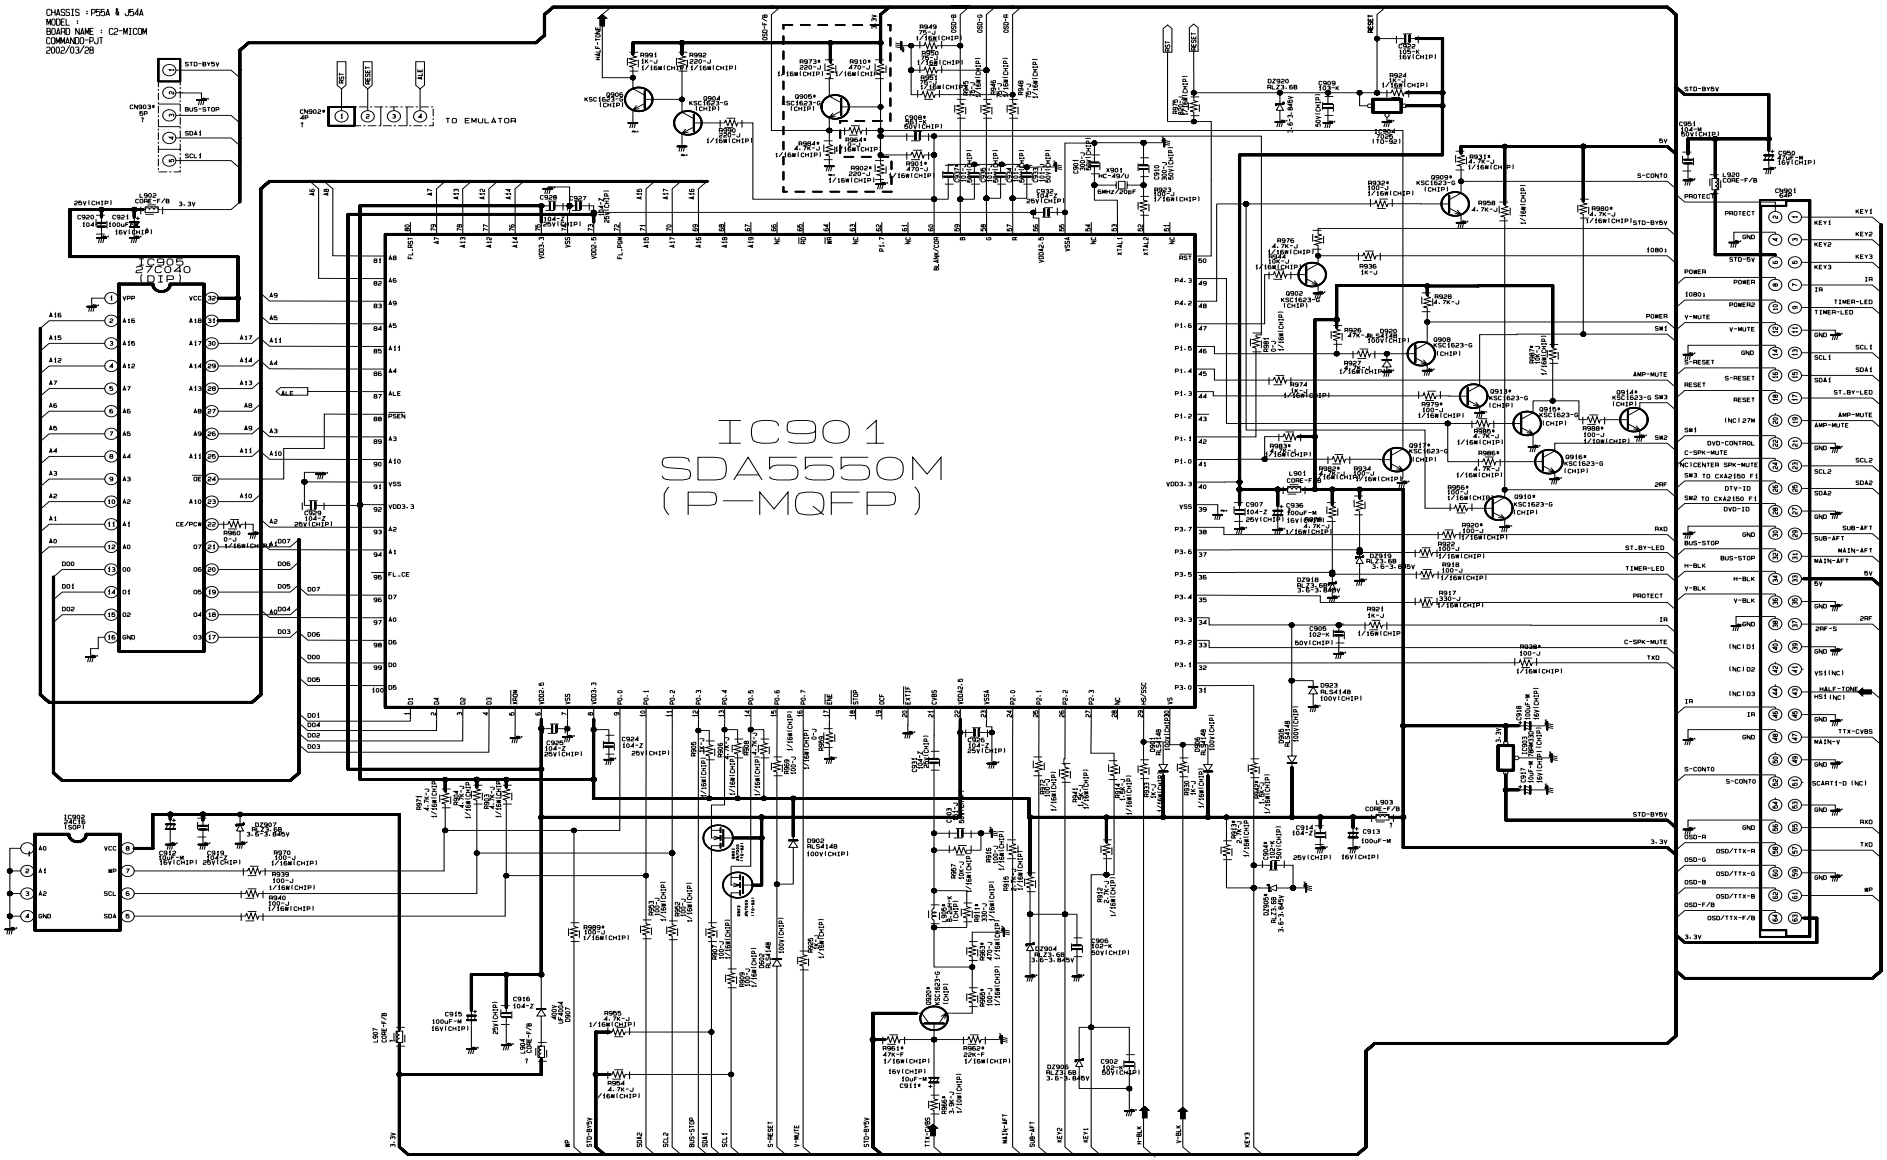
CHASSIS : P55A & J54A
MODEL :
BOARD NAME : C2-MICOM
COMMANDO-PUT
2002/03/20
IC901
SDA5550M
(P-MQFP)
IC905
27C040
(DIP)
IC908
24C08
TO EMULATOR

10-6 CRT

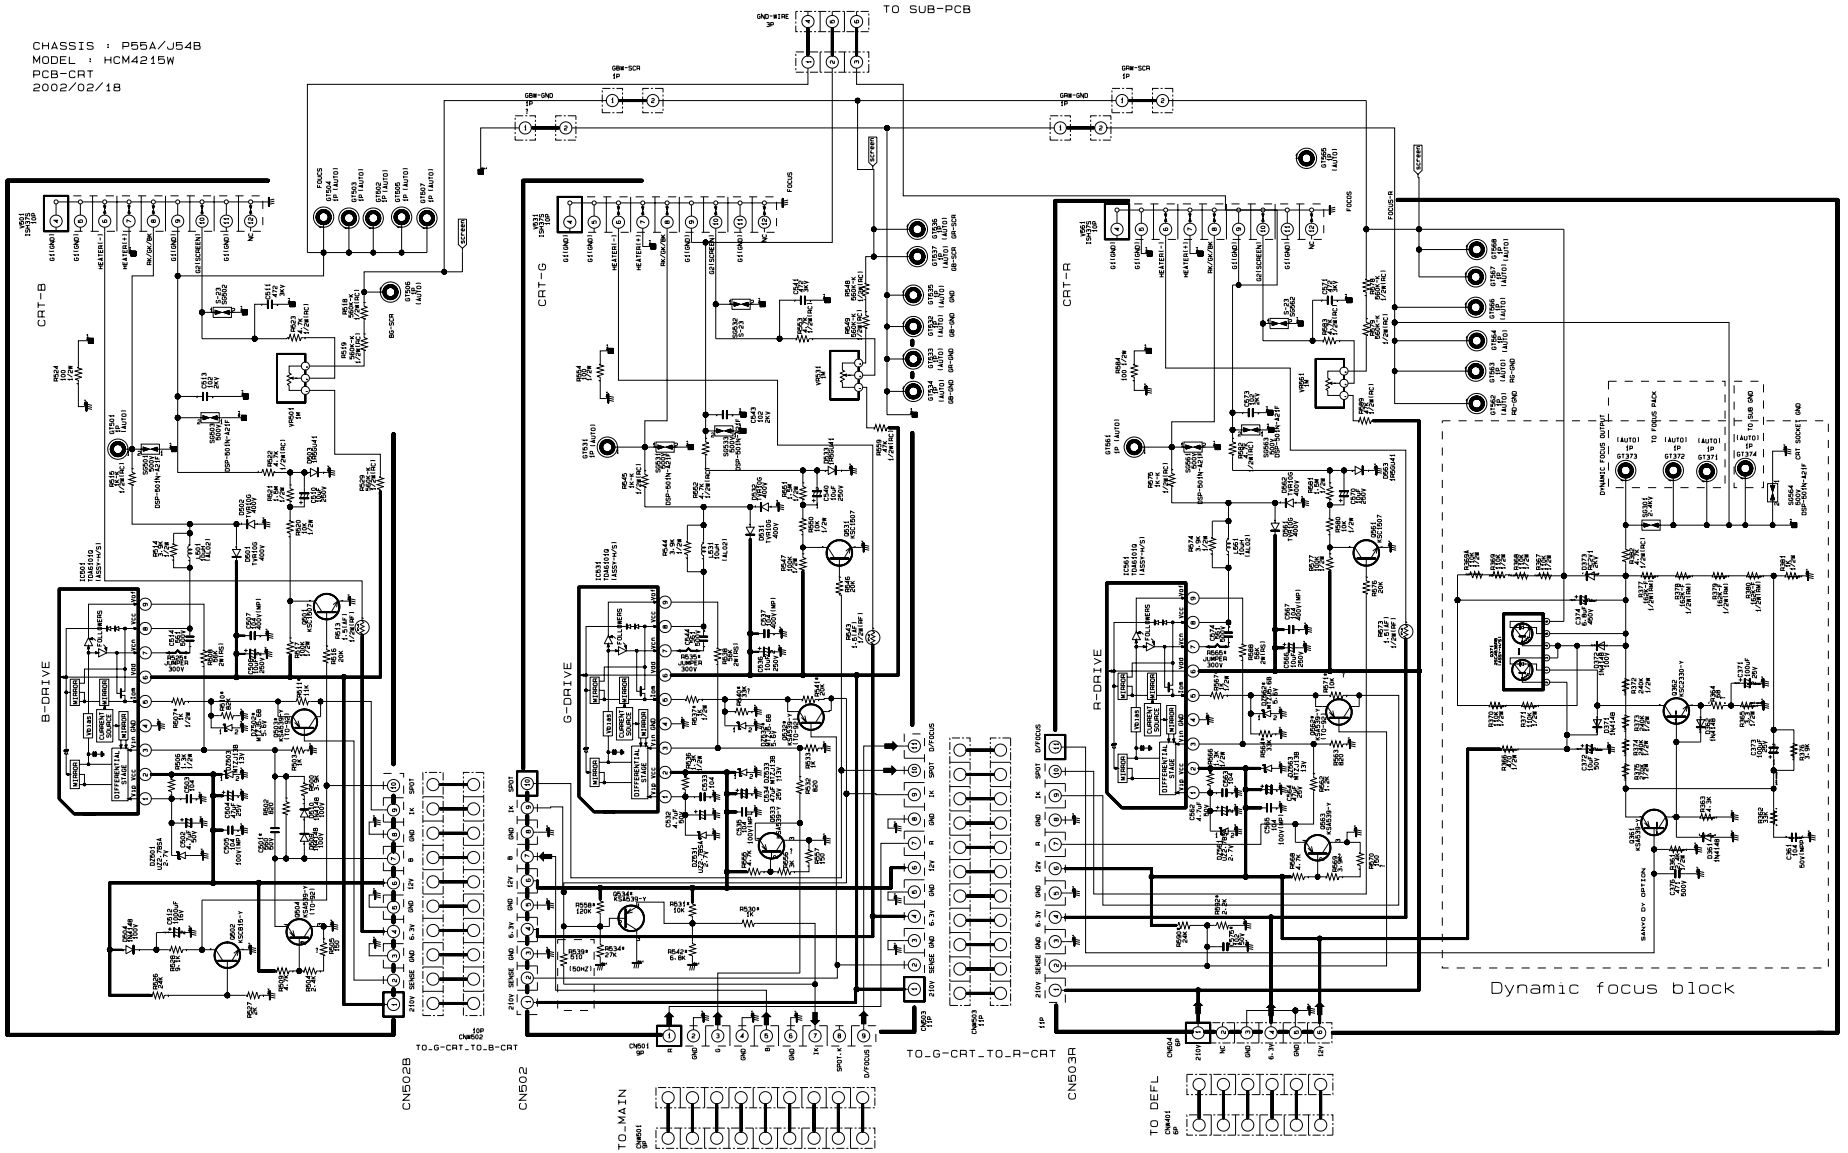
CHASSIS : P55A/J54B
MODEL : HCM4215W
PCB-CRT
2002/02/18
TO SUB-PCB
CRT-B
CRT-G
CRT-R
B-DRIVE
G-DRIVE
R-DRIVE
TO_G-CRT_TO_B-CRT
TO_G-CRT_TO_R-CRT
CN502B
CN502
CN503R
TO_MAIN
TO DEFL
Dynamic focus block

10-7 SUB 1

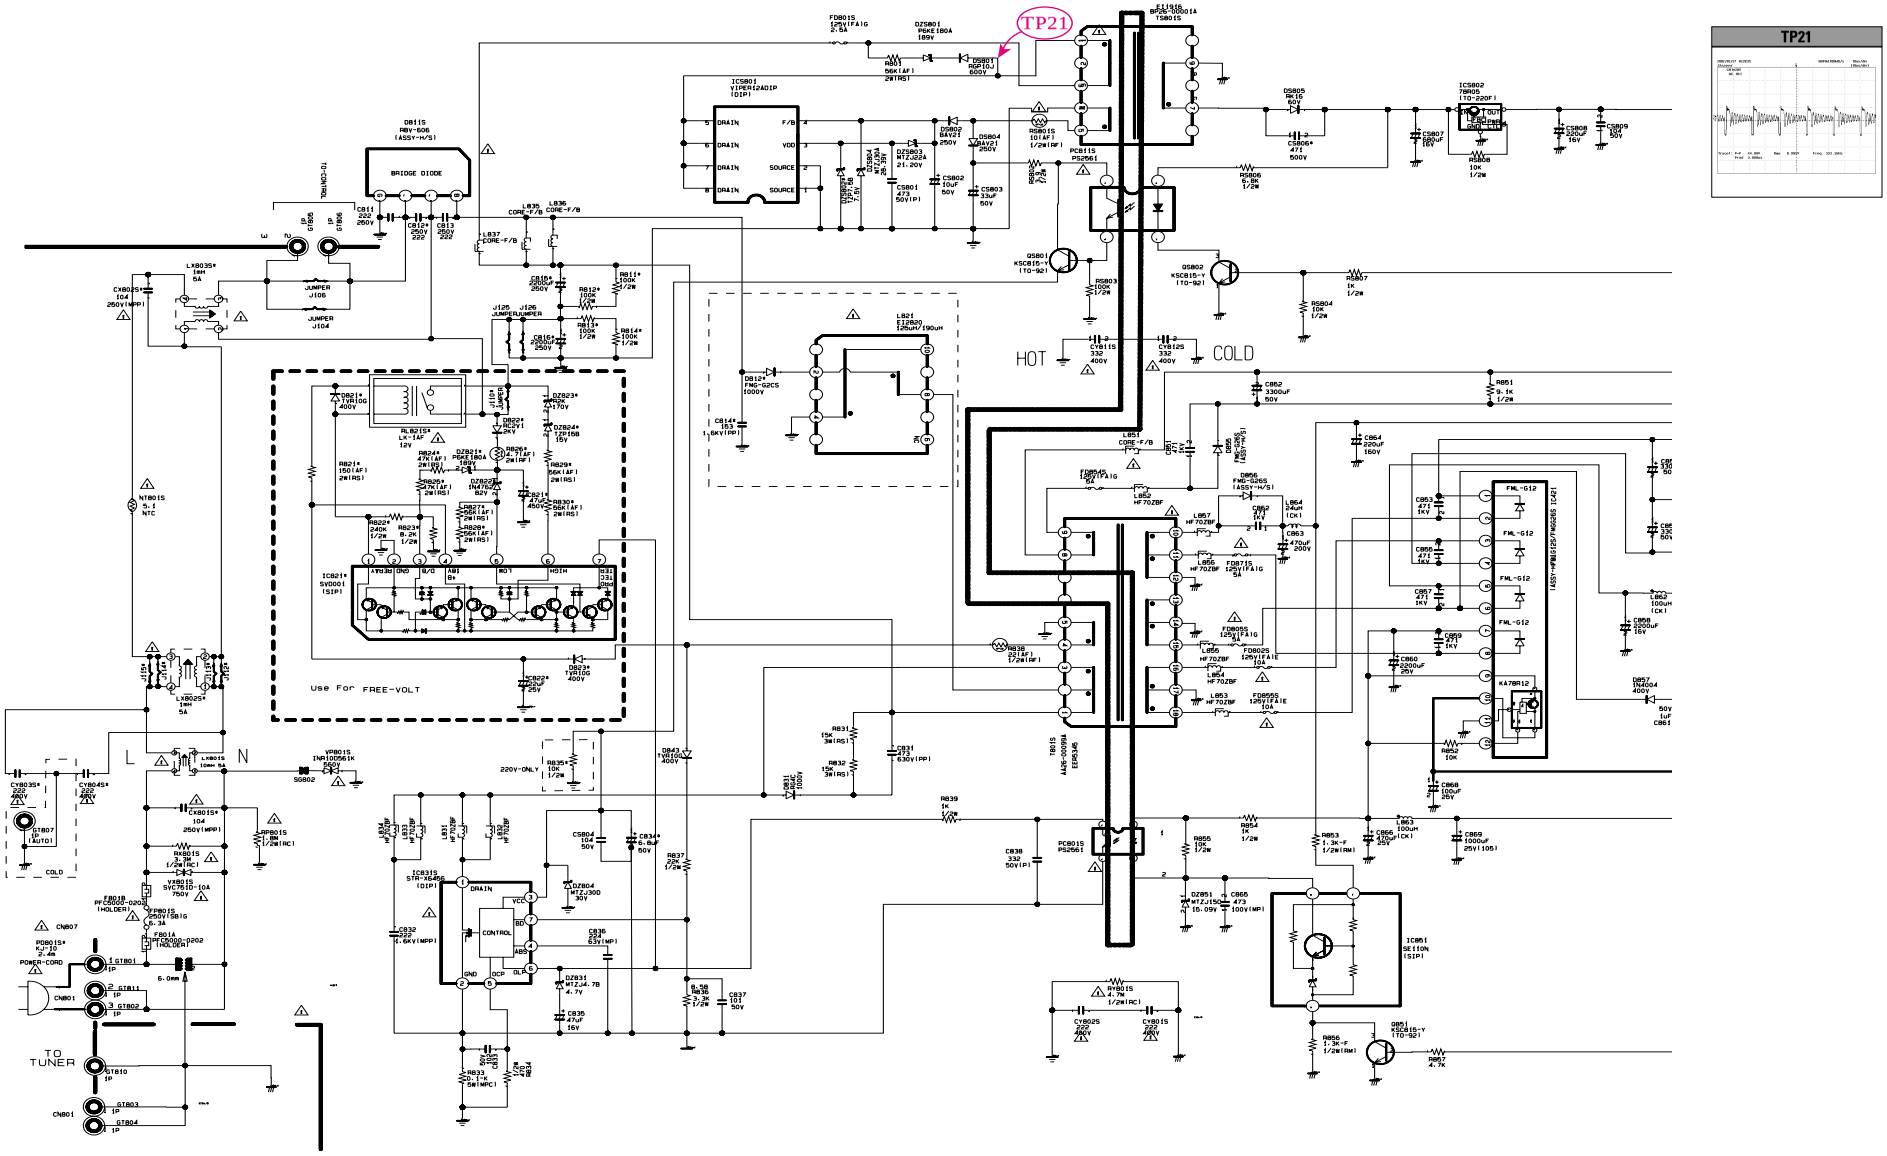

10-8 SUB 2

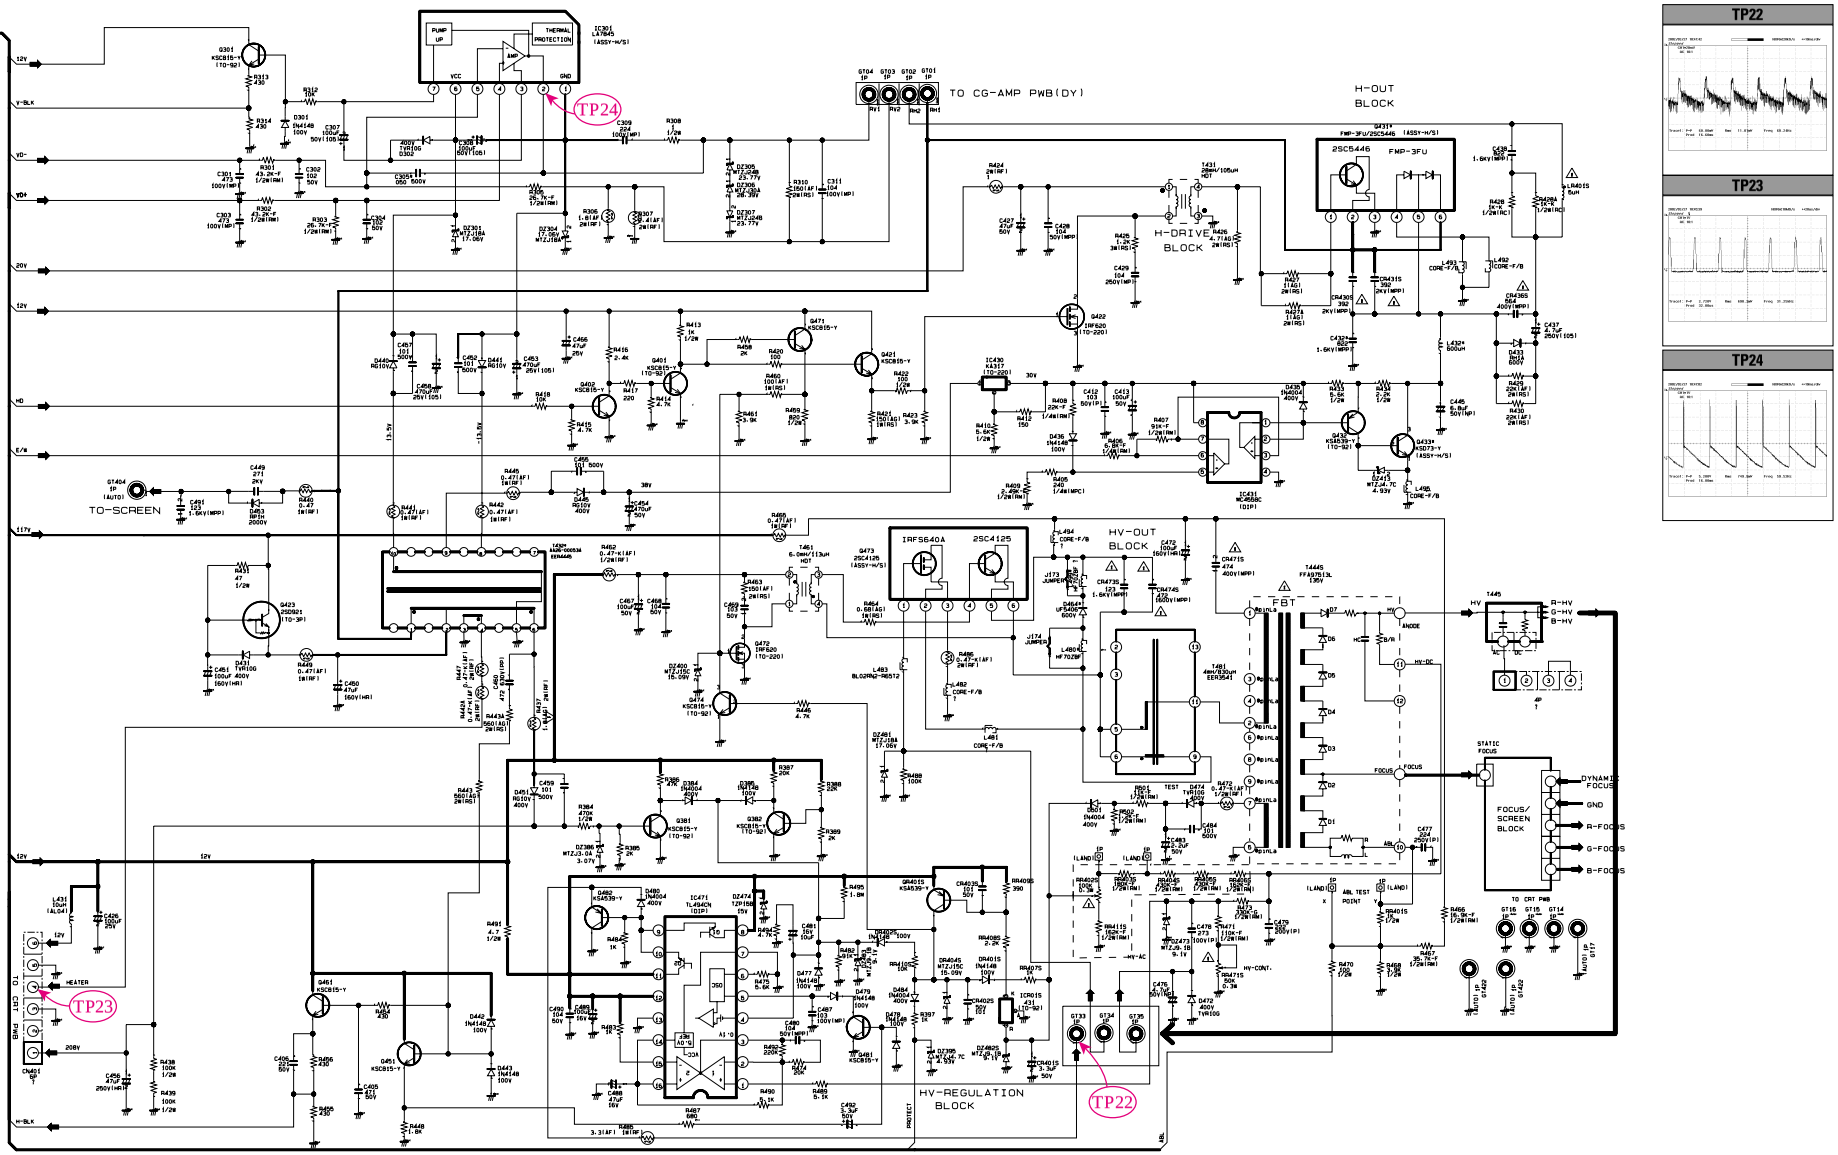
TP24
TP23
TP22
TO CG-AMP PWB(DY)
H-OUT BLOCK
H-DRIVE BLOCK
HV-OUT BLOCK
HV-REGULATION BLOCK
FBT
TO-SCREEN
STATIC FOCUS
FOCUS/ SCREEN BLOCK
DYNAMIC FOCUS
GND
R-FOCUS
G-FOCUS
B-FOCUS
R-HV
G-HV
B-HV
TO CRT PWB
HEATER
TO CRT PWB
12V
20V
208V
-13.5V
30V
117V

TP22

TP23

TP24

10-9 CONVERGENCE (SDC12 - 1)

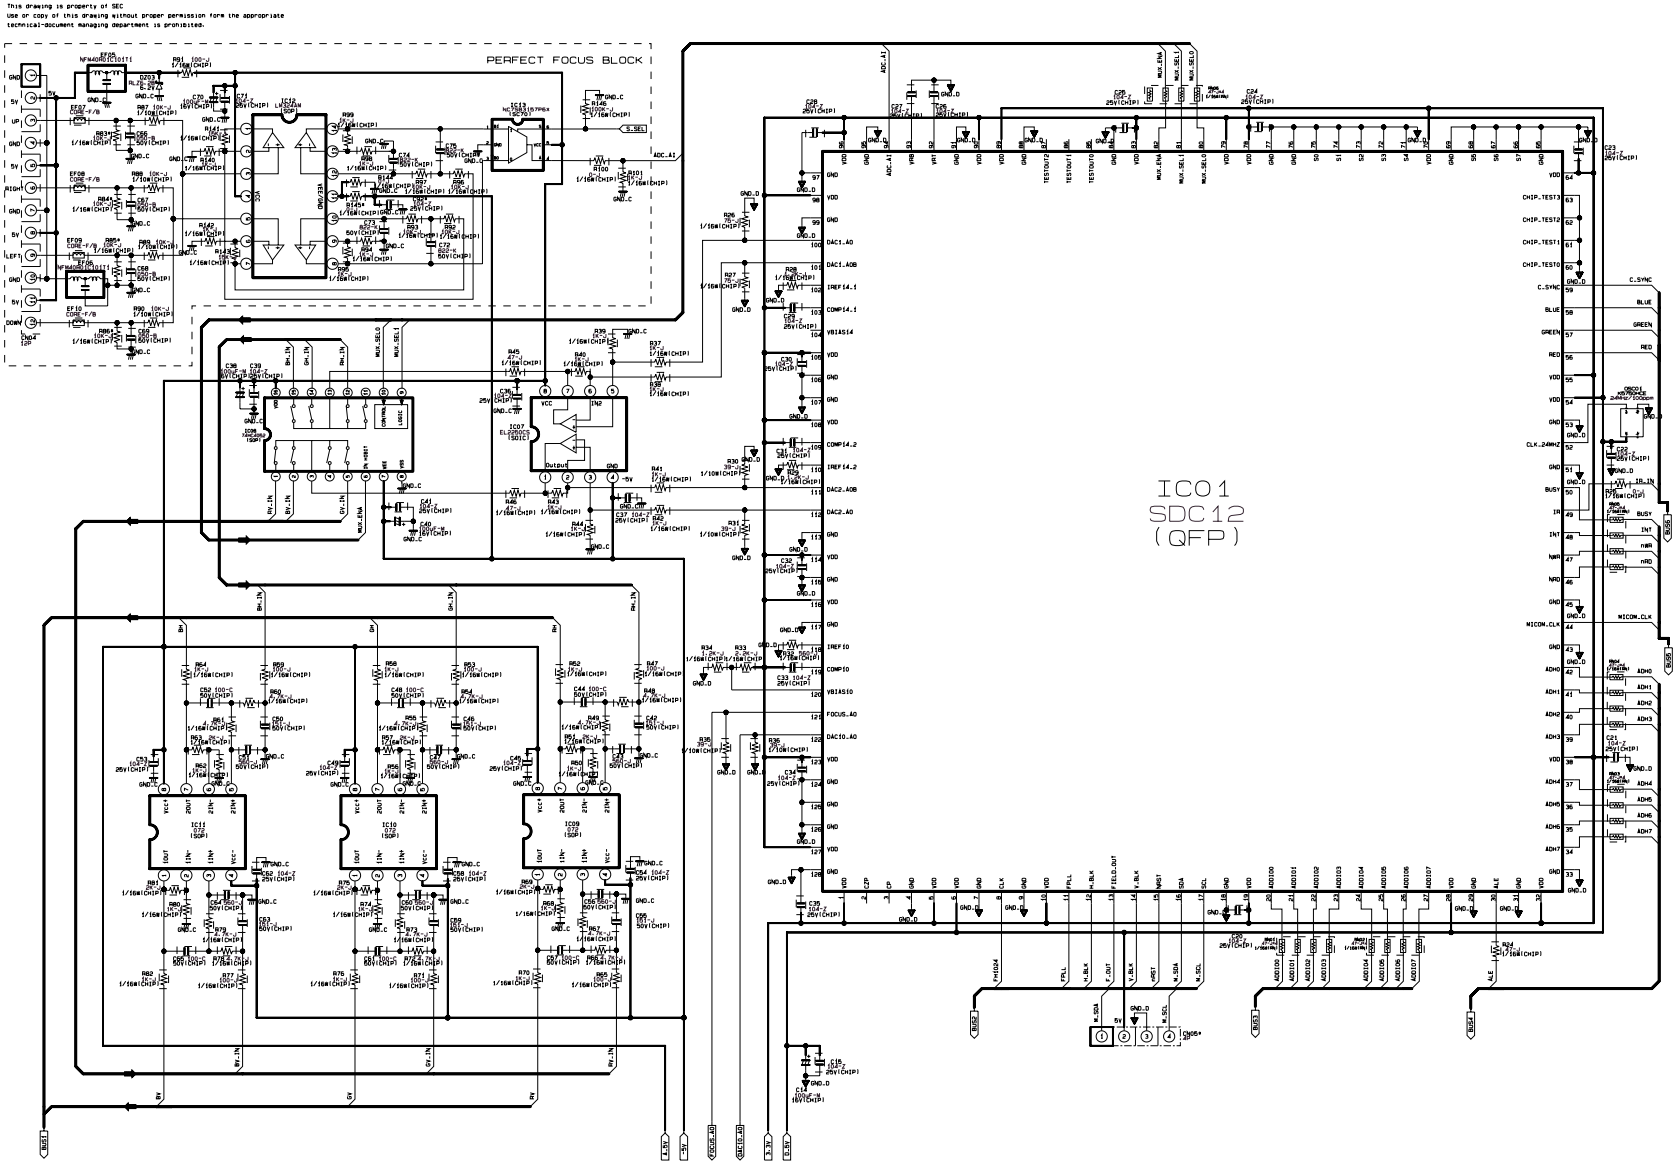
This drawing is property of SEC
Use or copy of this drawing without proper permission form the appropriate
technical-document managing department is prohibited.
PERFECT FOCUS BLOCK
ICO1
SDC12
(QFP)

10-10 CONVERGENCE (SDC12 - 2)

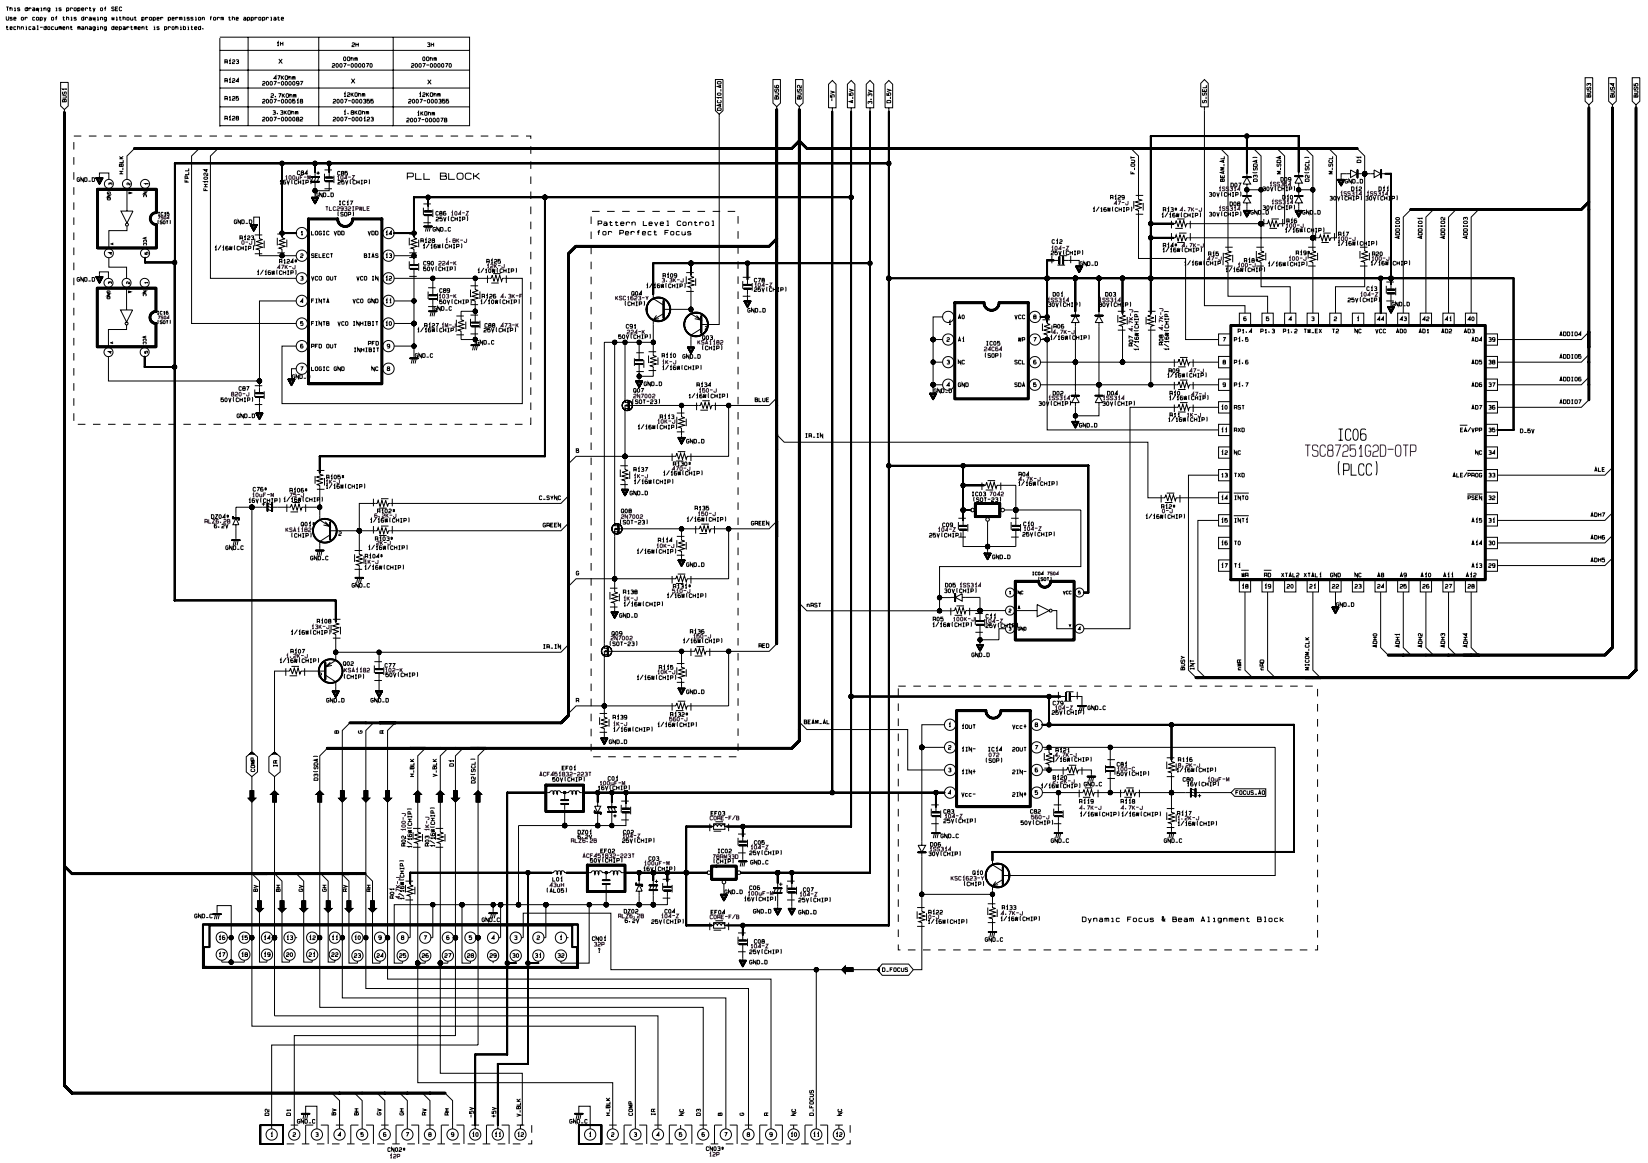

10-11 PRO SCAN 1

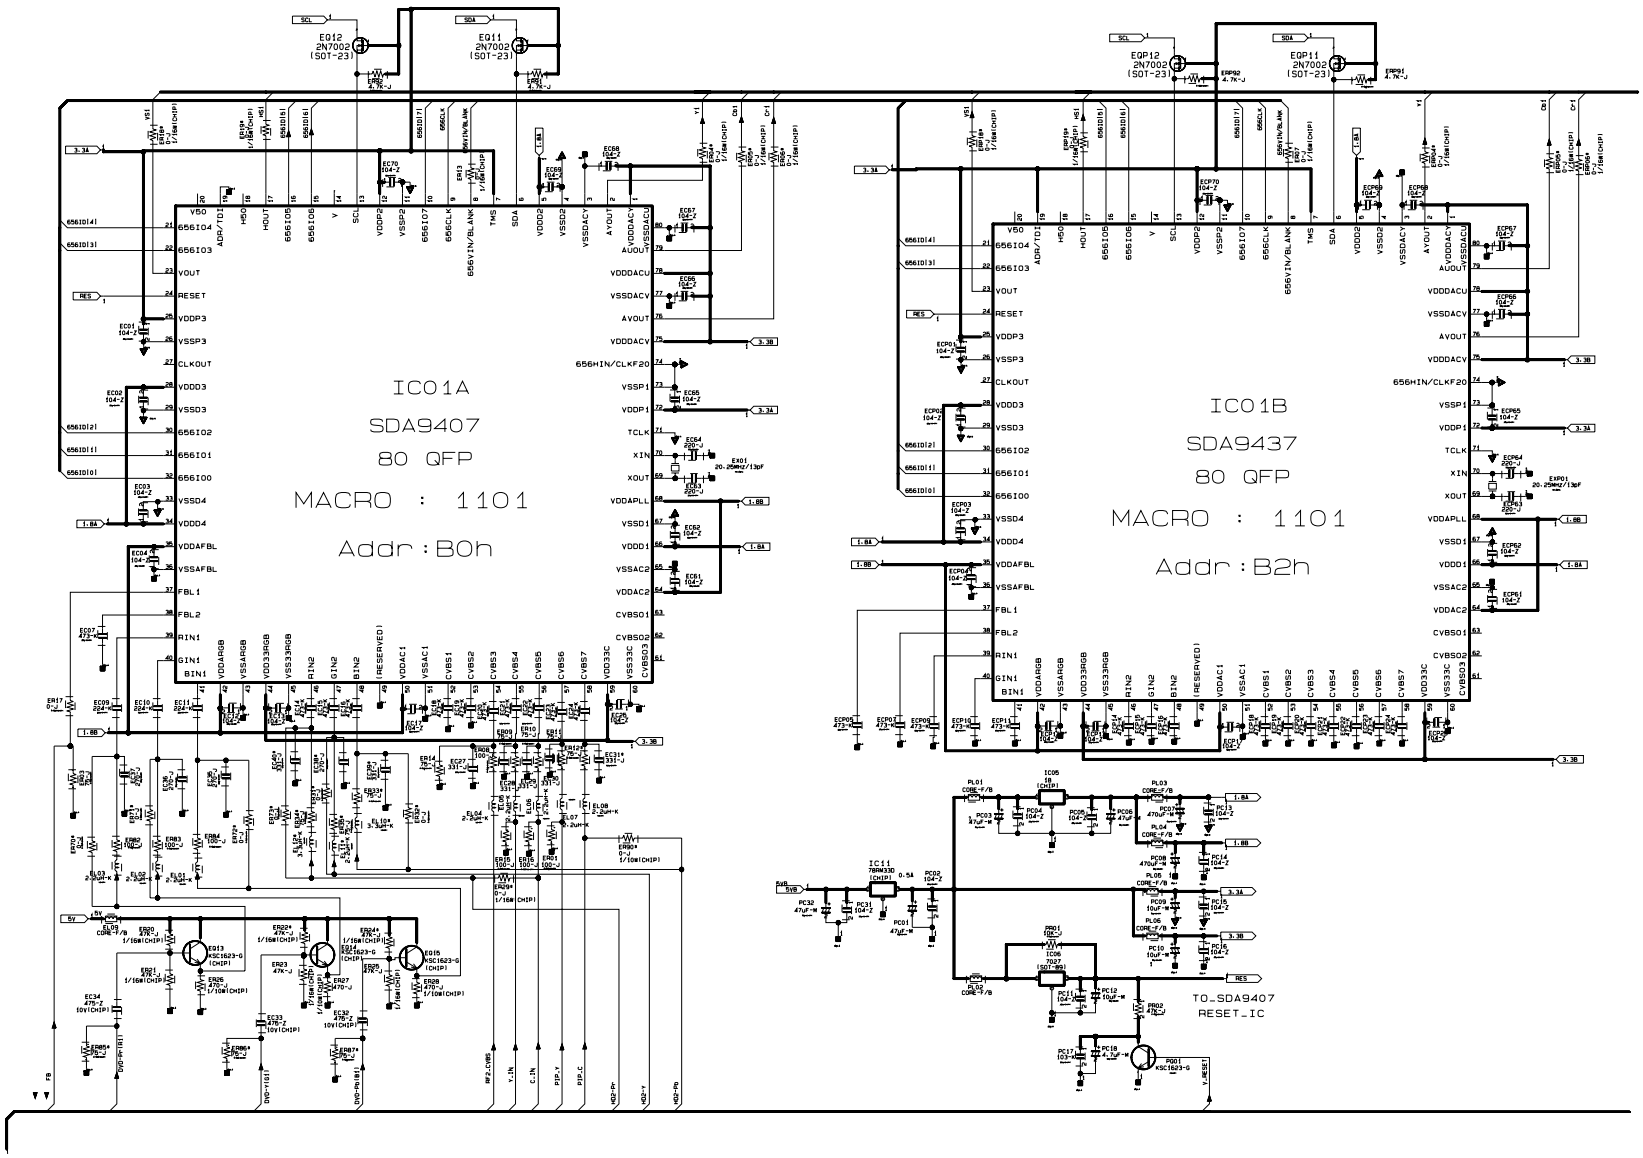

10-12 PRO SCAN 2

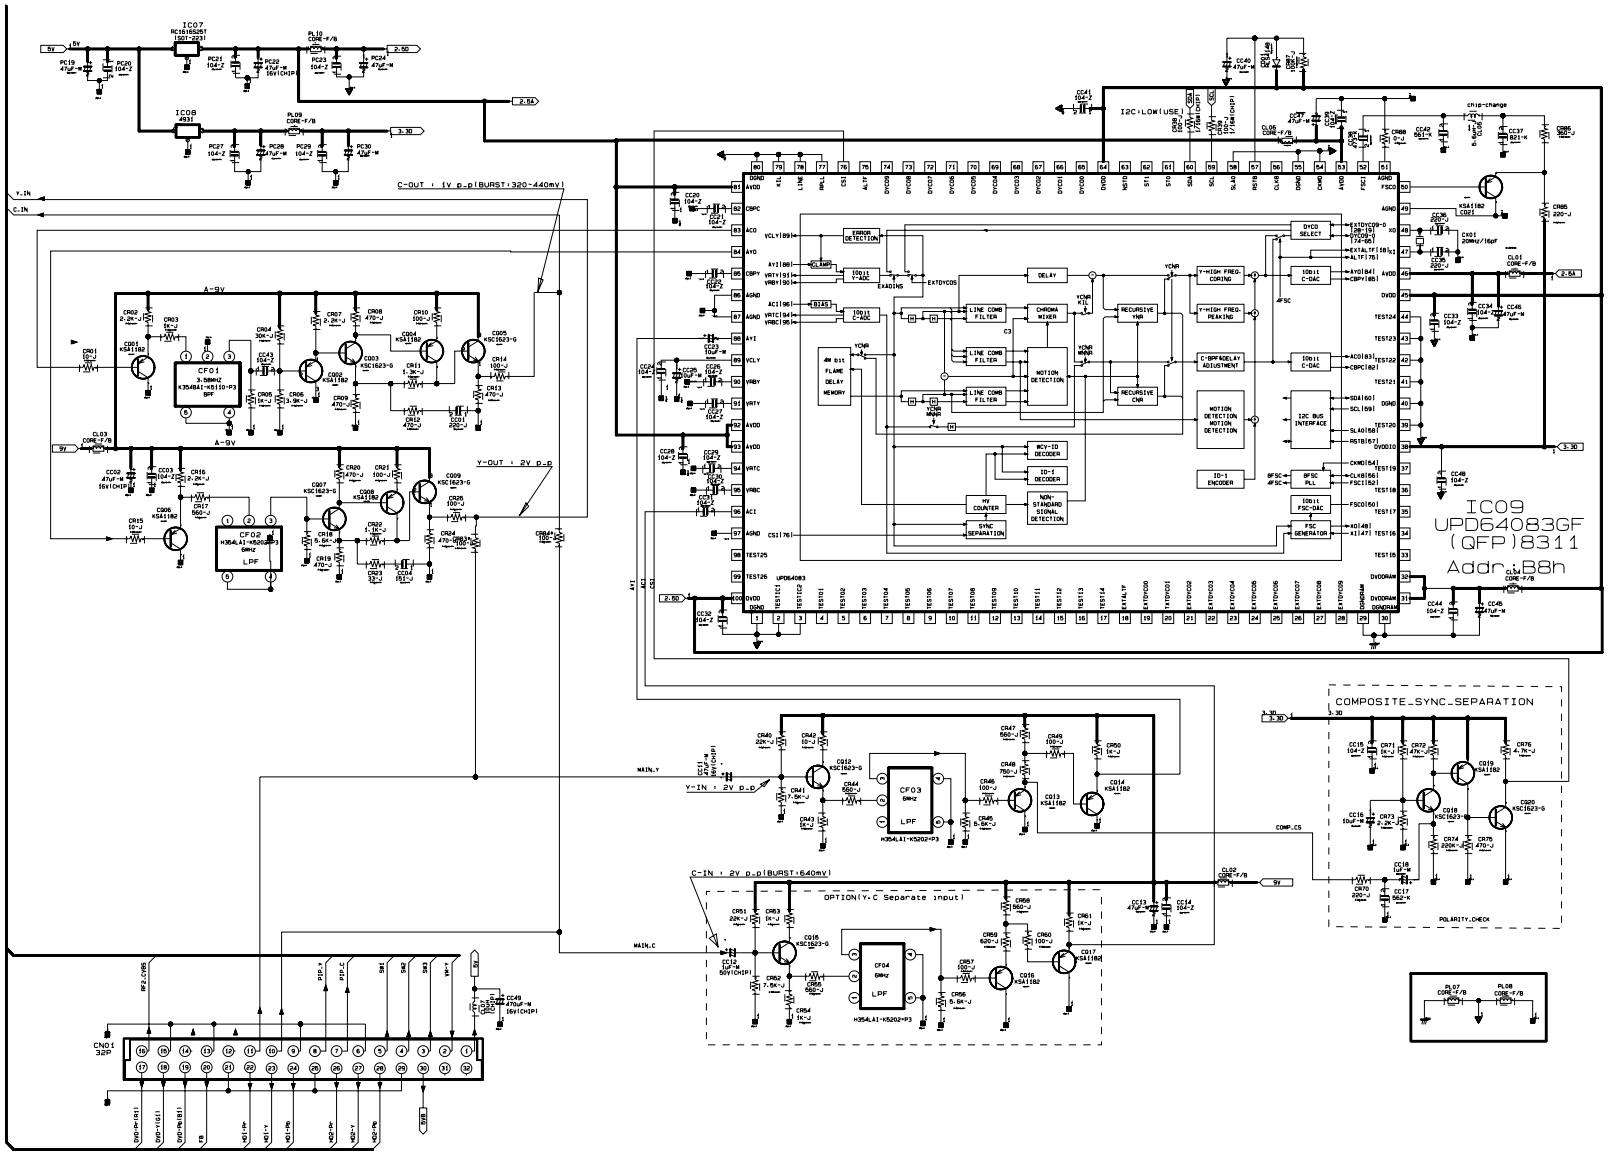

10-13 PRO SCAN 3

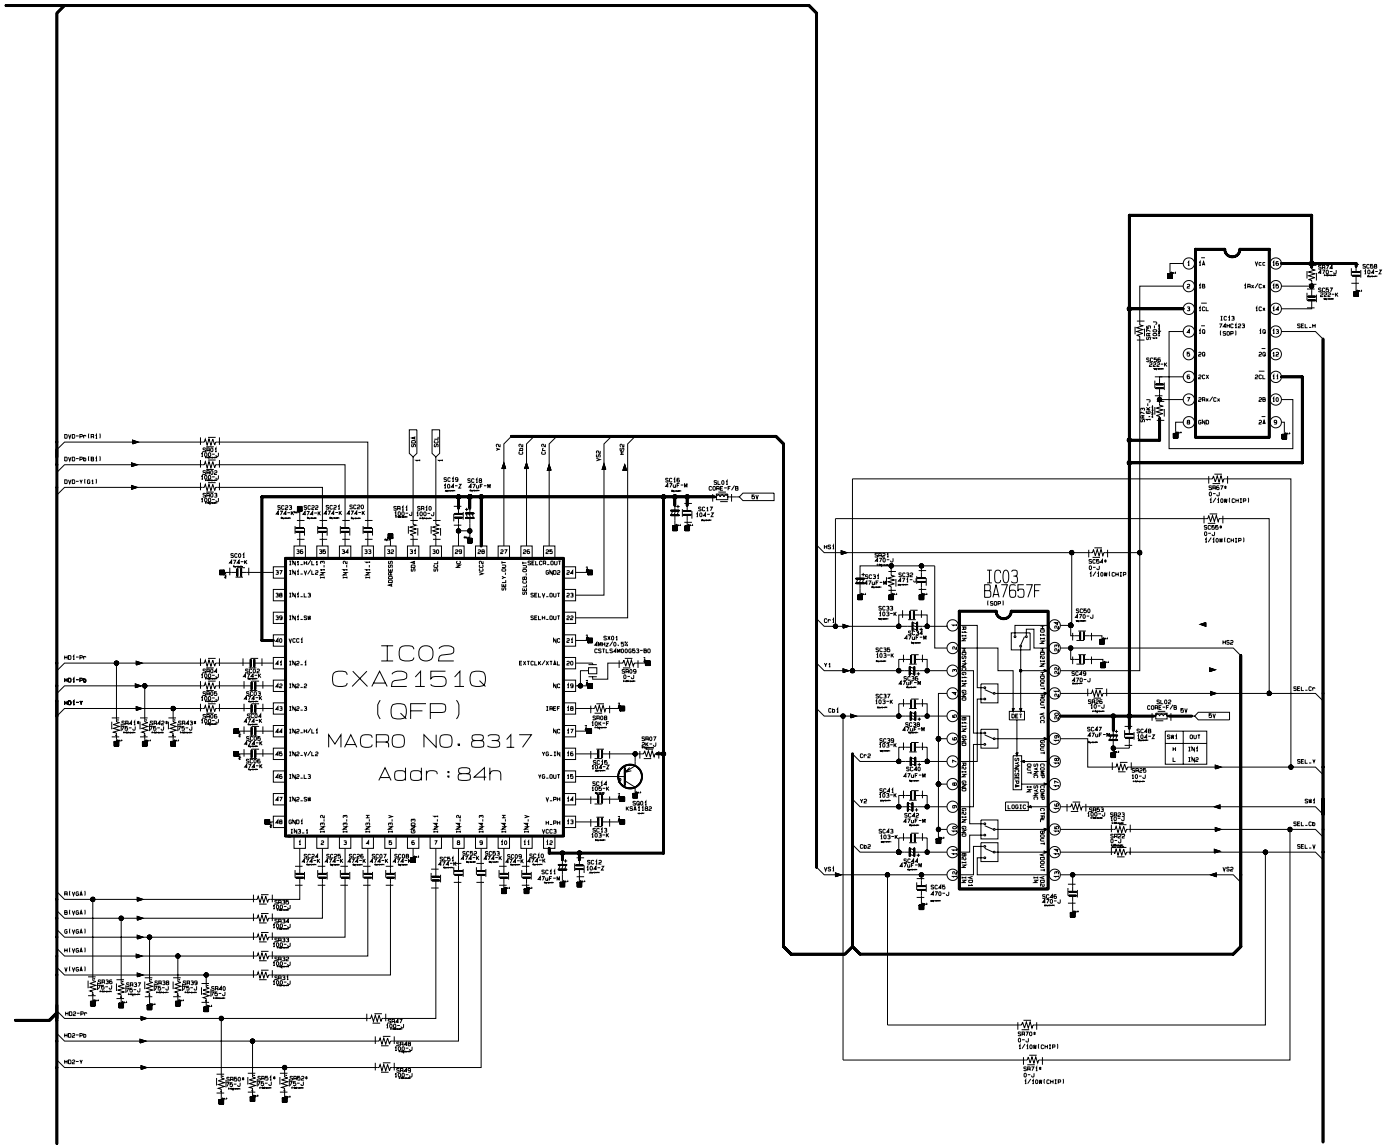

10-14 PRO SCAN 4

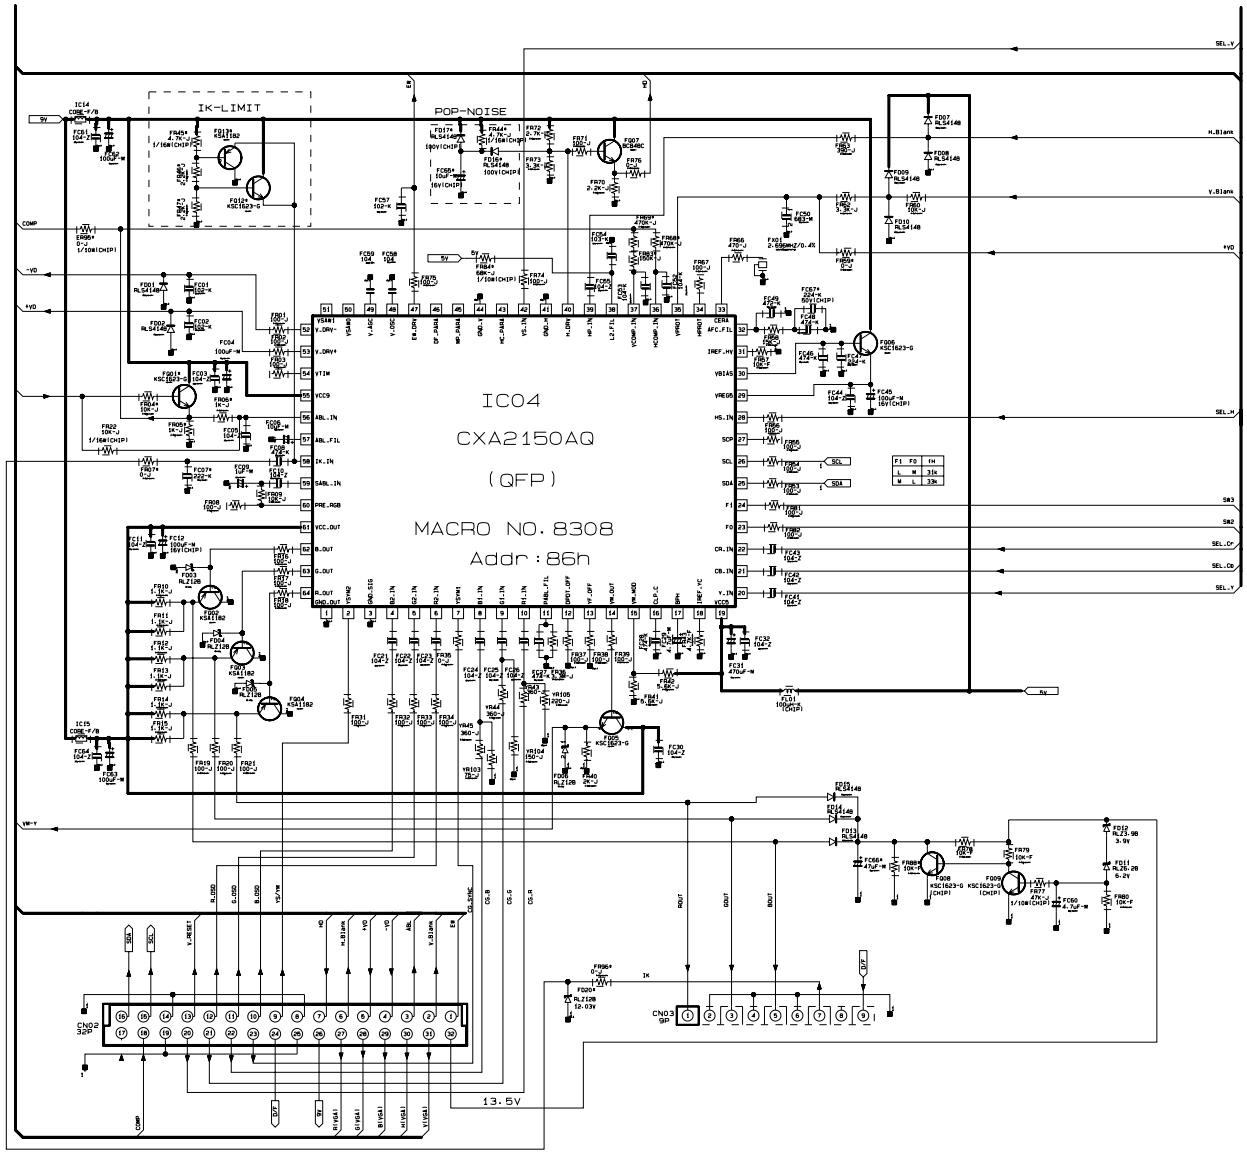

10-15 CG AMP

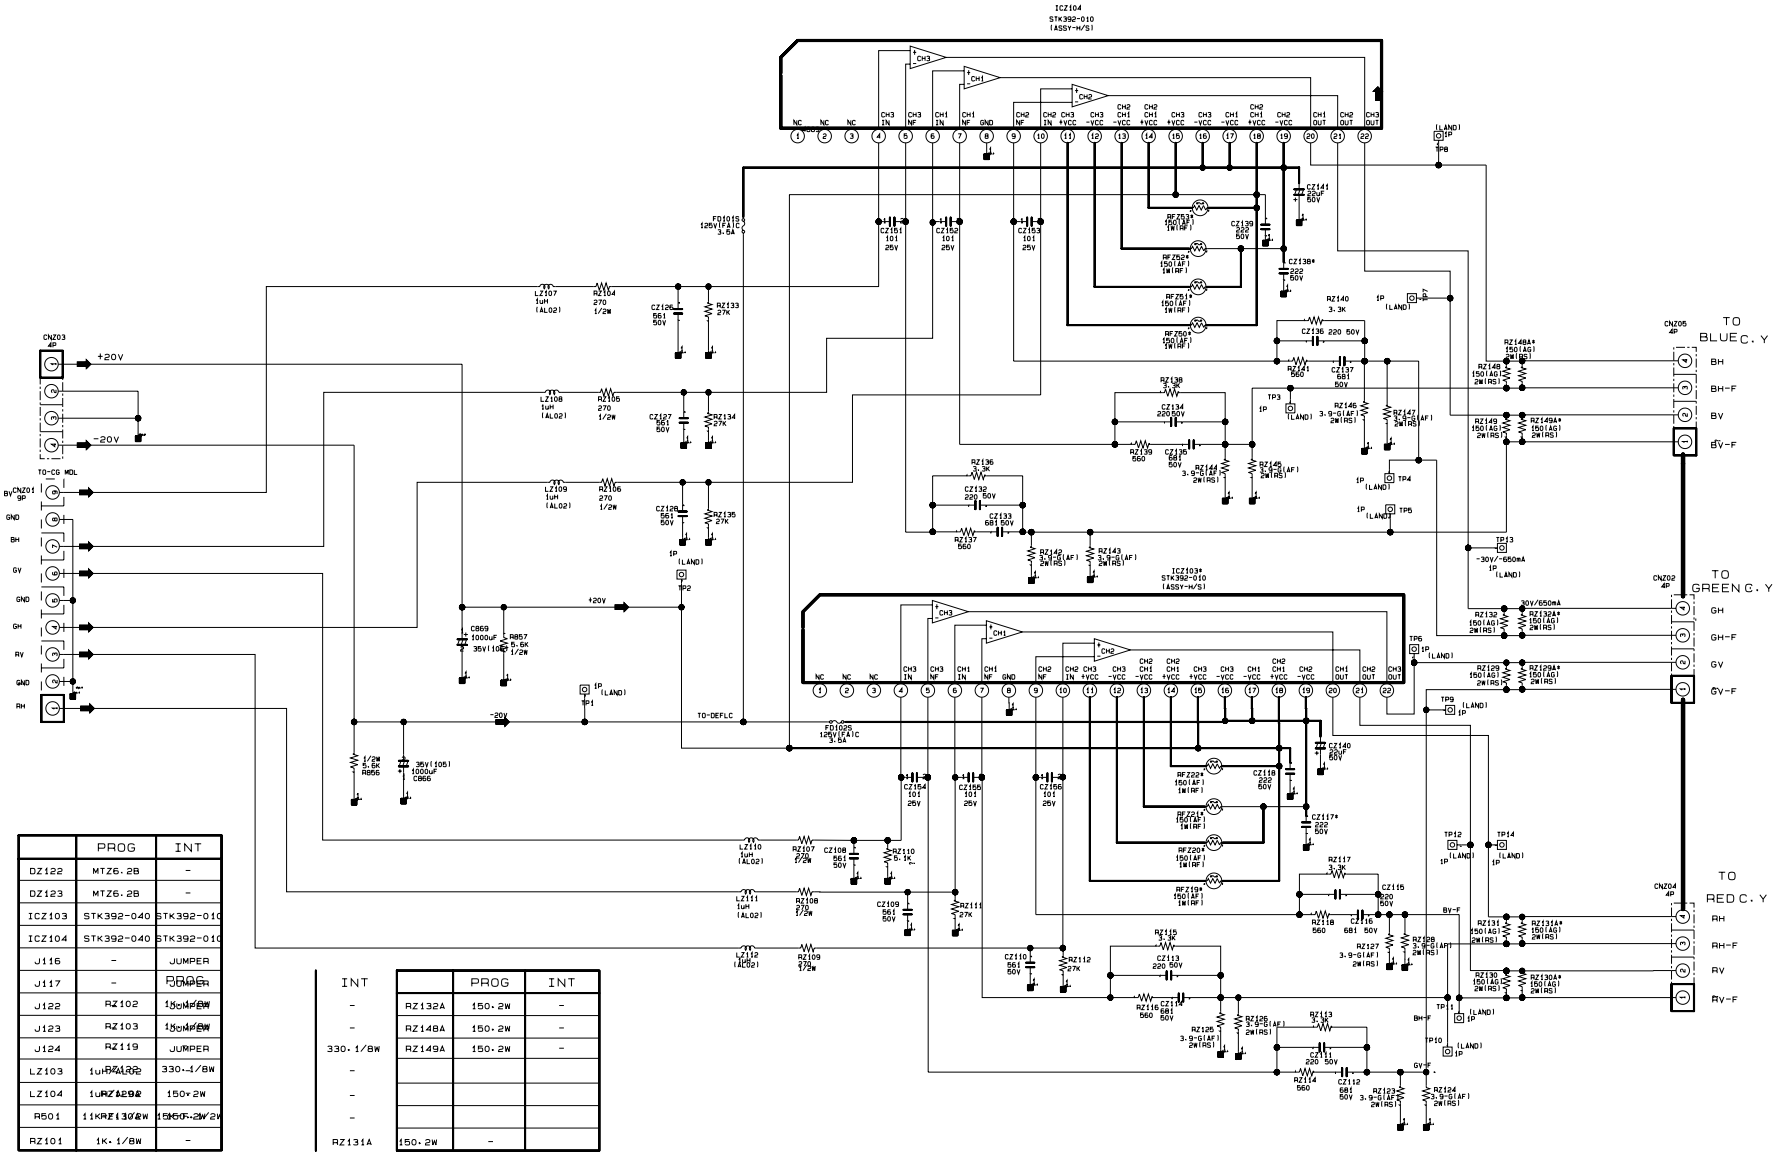

	PROG	INT
DZ122	MTZ6.2B	-
DZ123	MTZ6.2B	-
ICZ103	STK392-040	STK392-010
ICZ104	STK392-040	STK392-010
J116	-	JUMPER
J117	-	JUMPER
J122	RZ102	150-2W
J123	RZ103	150-2W
J124	RZ119	JUMPER
LZ103	1uH(AL02)	330-1/8W
LZ104	1uH(AL02)	330-1/8W
R501	11KRF(1/2W	150-2W
RZ101	1K-1/8W	-

INT		PROG	INT
-	RZ132A	150-2W	-
-	RZ148A	150-2W	-
330-1/8W	RZ149A	150-2W	-
-			
-			
-			
RZ131A	150-2W	-	

10-16 AV FRONT

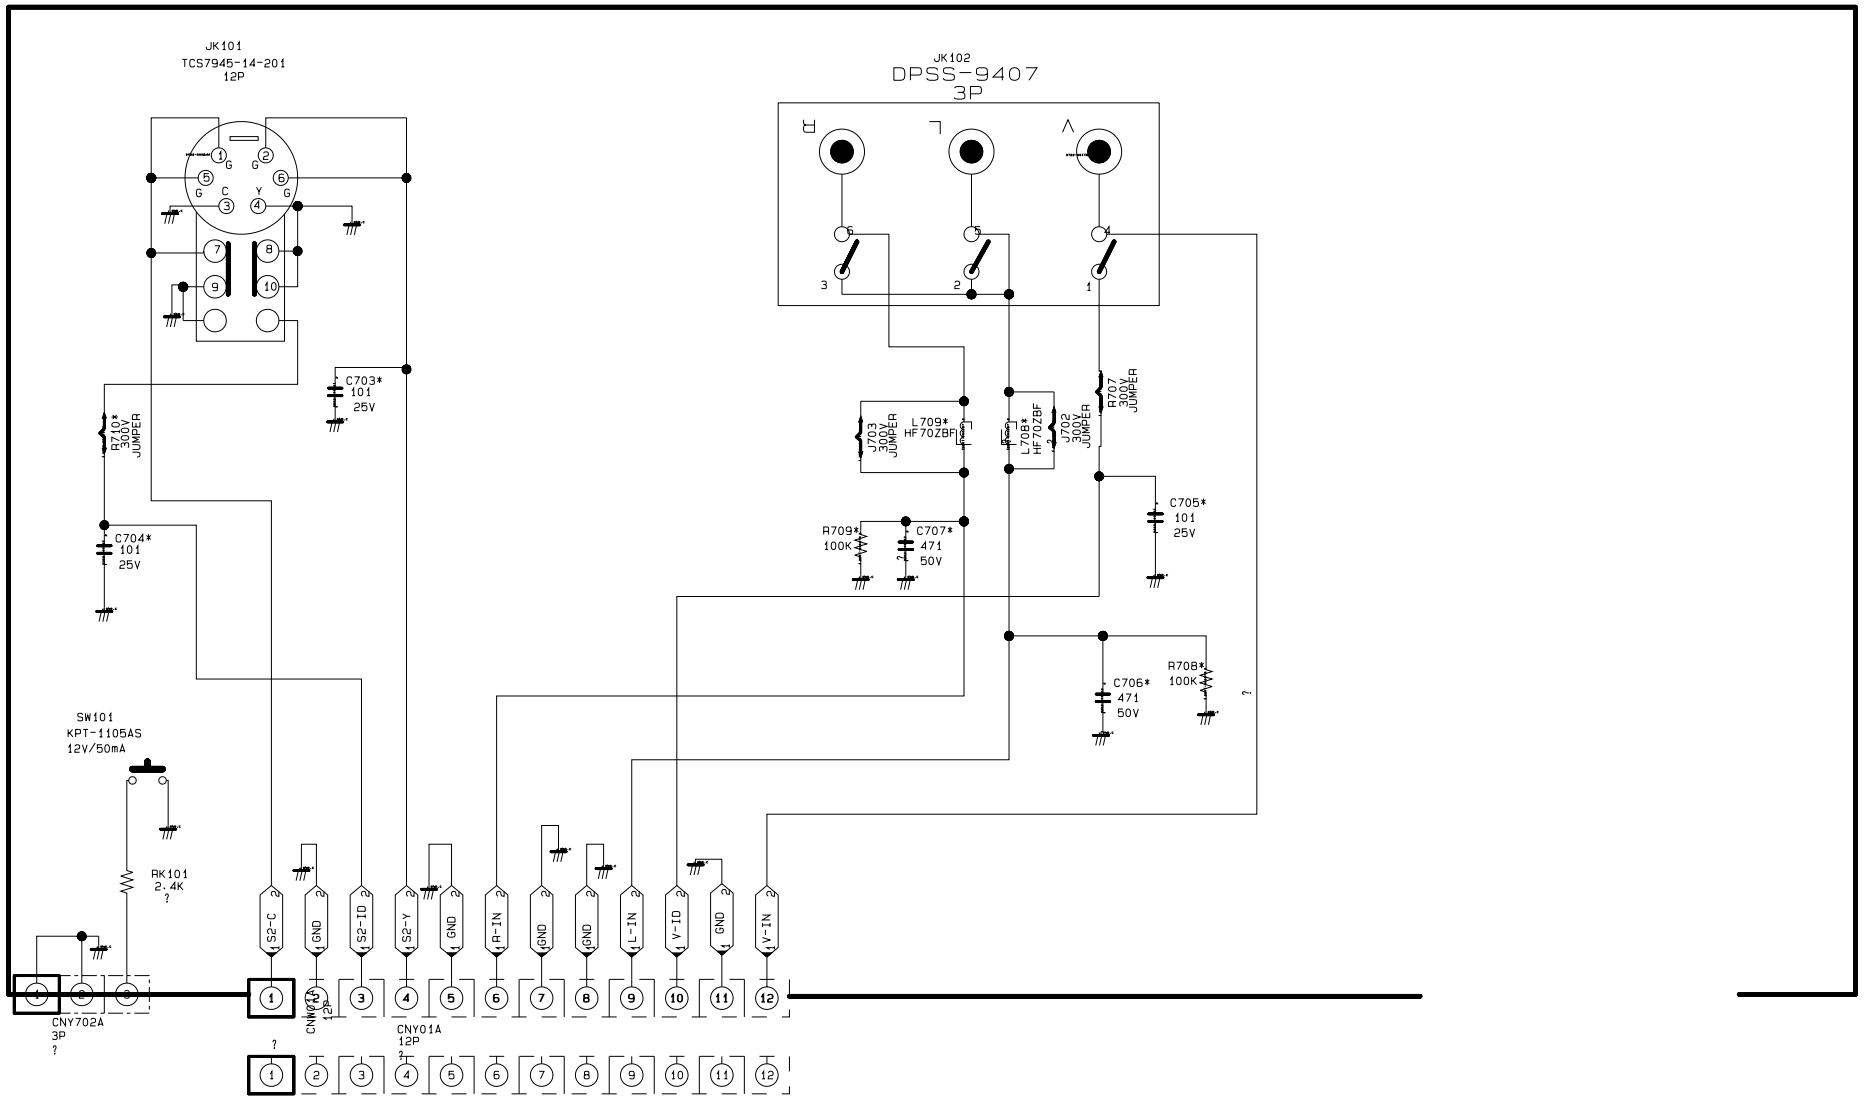

10-17 CONTROL

CHASSIS :W3
MODEL : P54A, P55A, P56A, J52A, J53A ALL MODEL
ASSY :PCB-CONTROL
PCB CODE :BP41-00001A
2002.01.16

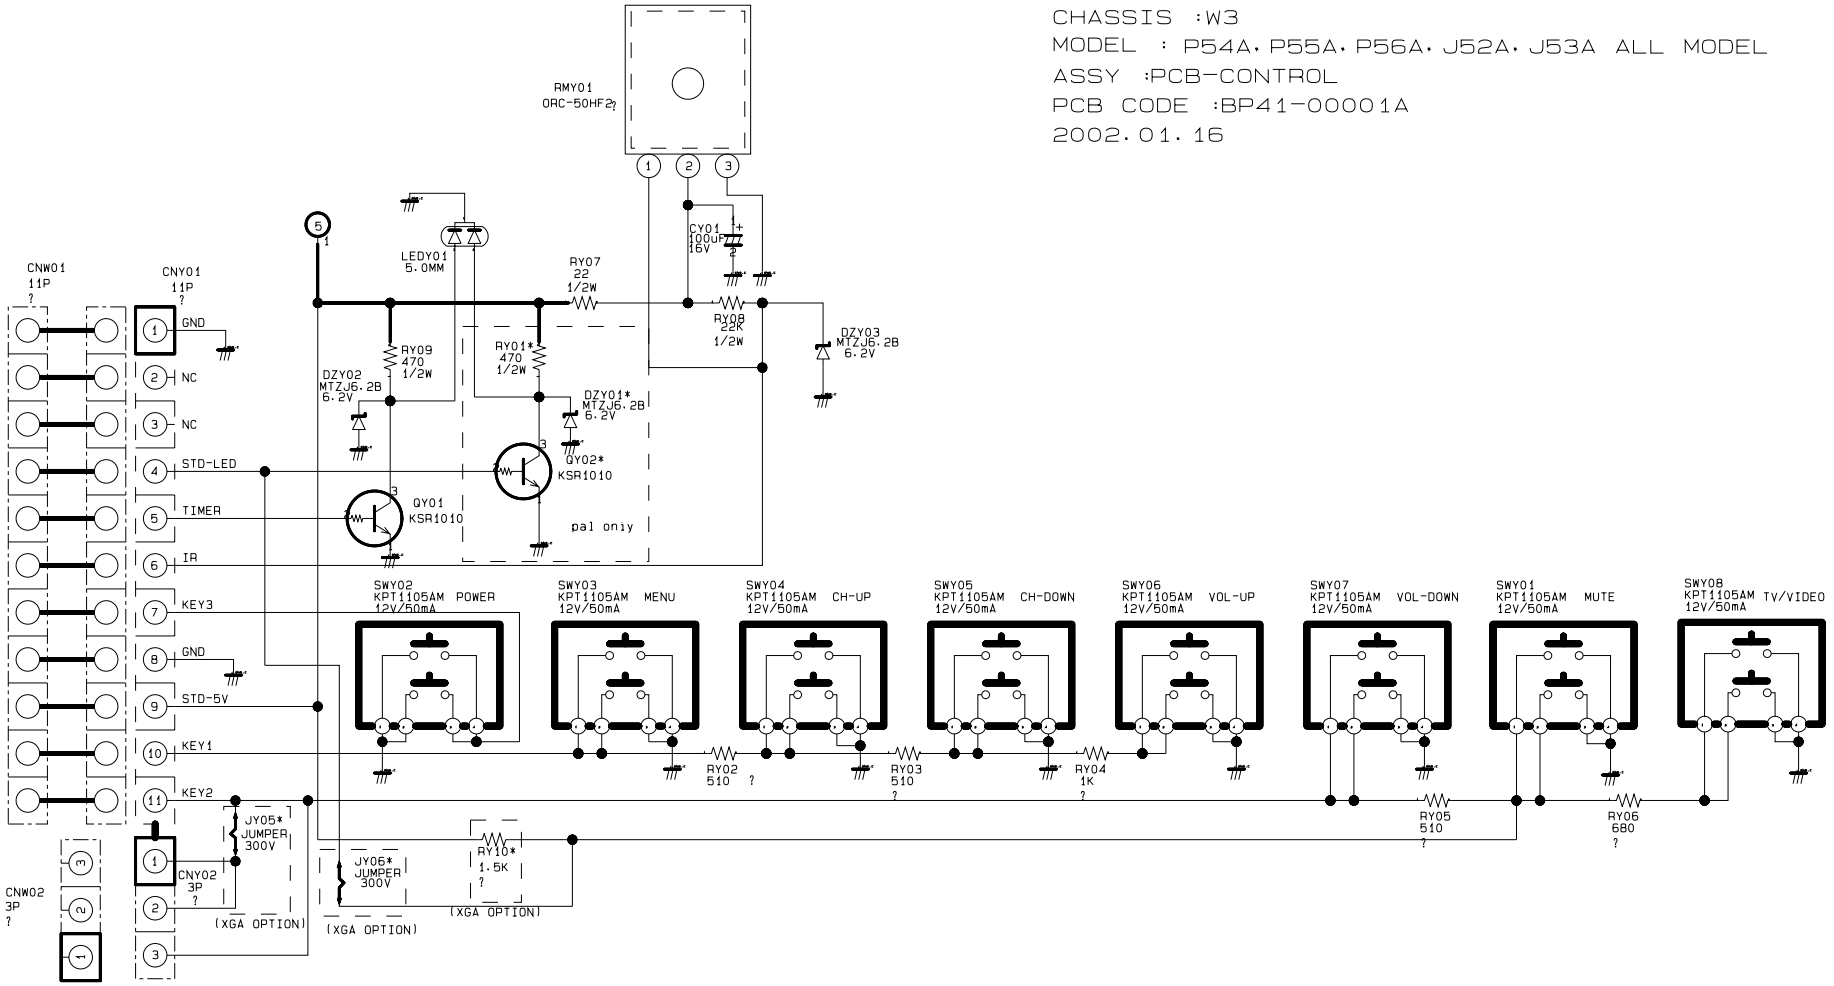

10-18 DY JACK, SENSOR